

ASSEMBLY INSTRUCTION

ETRESTLE TABLE




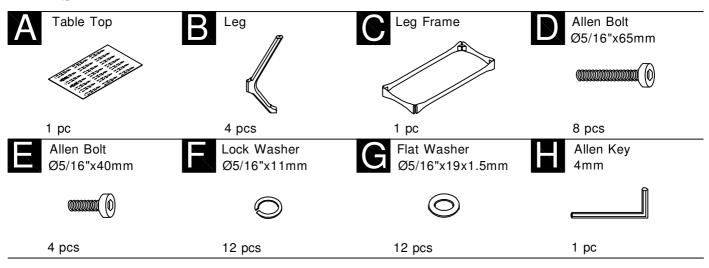


Attach four Legs (B) to Leg Frame (C). Use Allen Bolt (D), Lock Washer (F) and Flat Washer (G) on holes of Leg Frame (C). Turn Allen Key (H) in Allen Bolt (D).

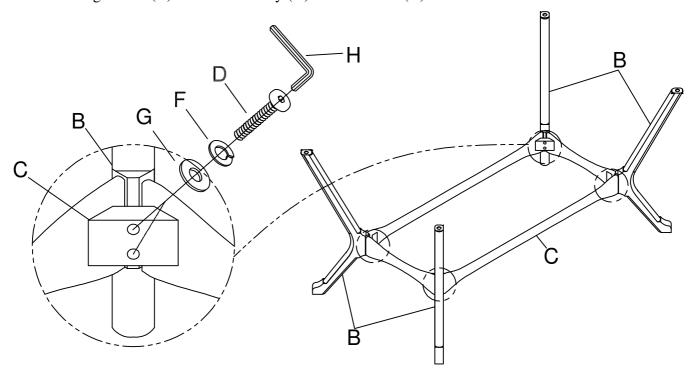

Attach Leg Frame (C) to Table Top (A). Use Allen Bolt (E), Lock Washer (F) and Flat Washer (G) on holes of Table Top (A). Turn Allen Key (H) in Allen Bolt (E).

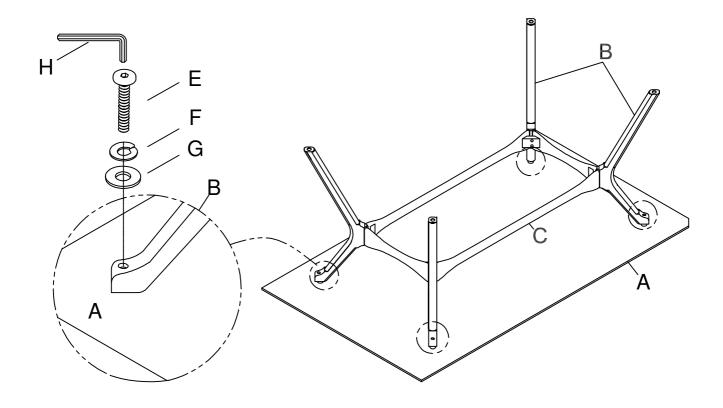

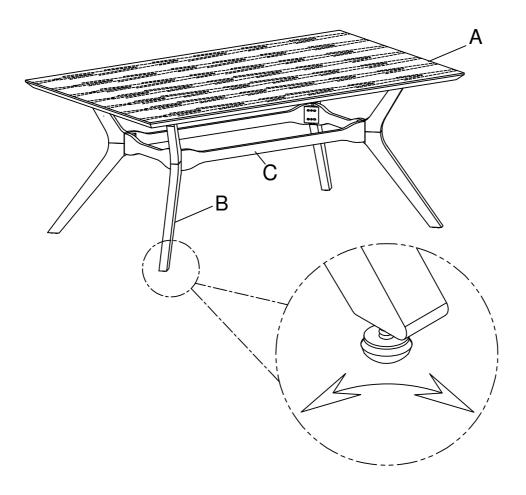


Cleaning & Care


Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

ASSEMBLY INSTRUCTION

SIDE CHAIR

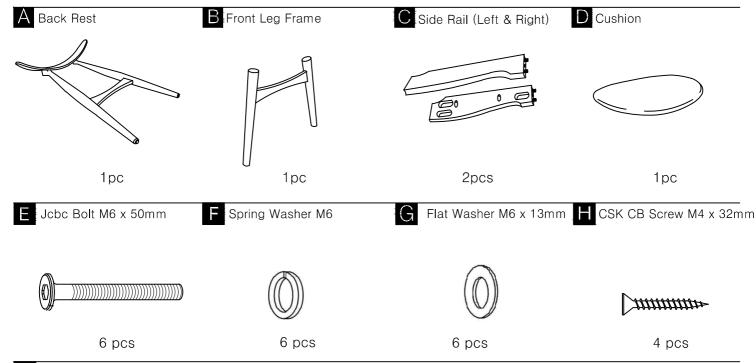

Allen Key M4 x 110






This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

1

Put the Back Rest (A) upside down on the soft and smooth surface. With assistance attach Side Rail (C) Left & Right onto Backrest (A). Then insert Jcbc Bolt (E), Spring Washer (F) and Flat Washer (G) into predrilled holes of each Side Rail, by using Allen Key (I). Do not fully tighten the bolts in this step.

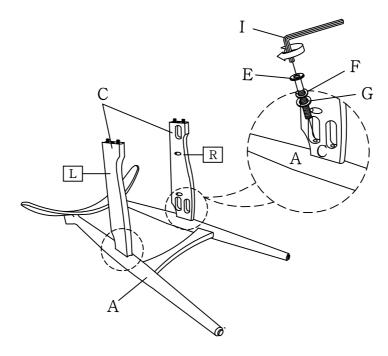


Take the Allen Wrench, and turn the bolts until the legs are secure. DO NOT TIGHTEN COMPLETELY.

Stop when you feel you are adding force to tighten the bolt.


2

Attach Front Legs (B) onto Side Rail (C), insert Flat Washer (G), Spring Washer (F) and Jcbc Bolt (E) using Allen Key (I).

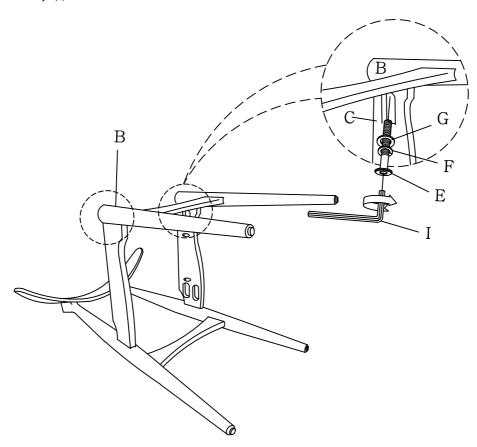


3

Stand chair up on an even surface and check that it is balanced. If there is a slight wobble, apply downward pressure on each corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts. If balanced, apply downward pressure evenly in the center and tighten all bolts. Do not over-tighten beyond hole depth.

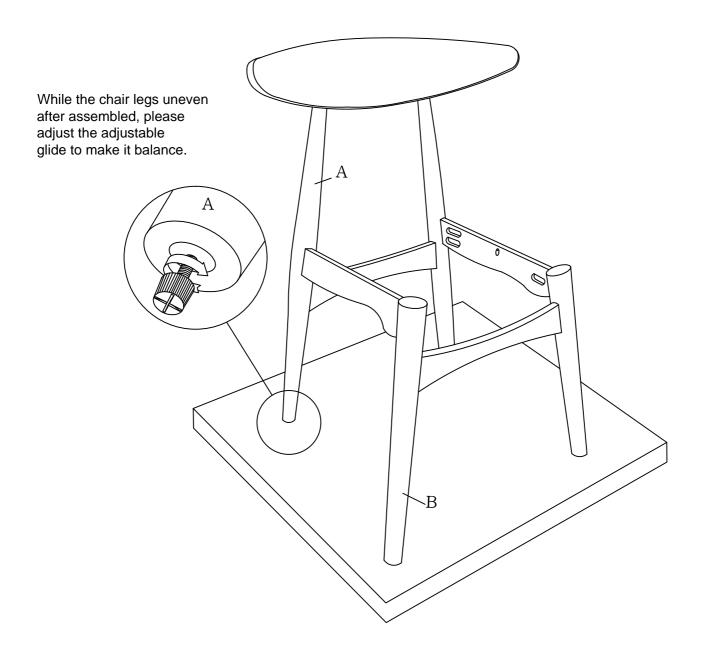

Helpful Tip:-Have someone applying downward pressure on the chair while you tighten the bolts.

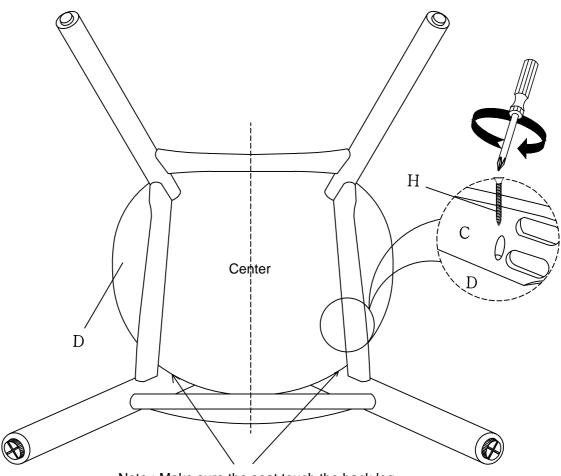

Note: Make sure the seat touch the back leg

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.