


To use this light fixture with the sensor, please be sure to read this instruction.

Sensor Specification Details:
A: Suggested Mounting Height: 1.8 m ~ 2.2 m
B: Motion Detection Length: 35 ft (Max.)
C: Motion Detection Angle: 220° (Max.)
Working Temperature: -30~50°C

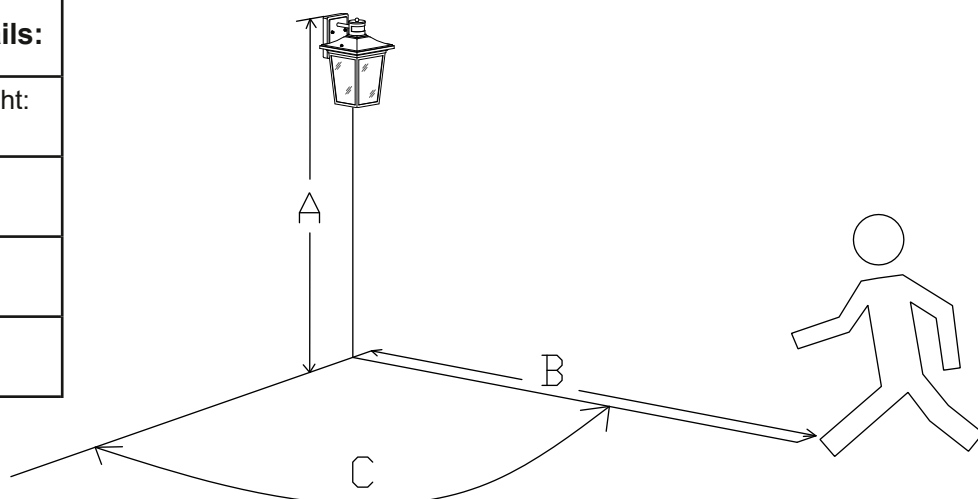

NOTE:

- For further information about A, B and C in the chart, please refer to the illustration.
- The above specification is measured at 25°C (mounted at the suggested height), and the actual use may vary in different situations.

Basic Functions Description:

1. Start-up

First-time powered on, the light keeps at 100% brightness for several seconds and automatically enters Test Mode.

2. Test Mode

In Test Mode, the initial brightness of light is 40%, and increases to 100% (but only for several seconds) each time someone moves near the light.

3. Auto Mode

In Auto Mode, brightness maintains at 40% for all night (but the light turns off about 1 minute after being exposed to daylight).

When someone moves near the light, LED indicator flashes 3 times, and brightness immediately increases to 100% (but back to 40% without motion detection about 1 minute after).

4. Manual Mode

In Manual Mode, brightness maintains at 100% for 7-9 hours at night (but about 1 minute after being exposed to daylight, the light turns off and exit Manual Mode).

General Instructions:

» How to test if the Motion Detection Function works properly:

Solution: Test Mode allows you to check the light and test the Motion Detection Function for about 2 minutes. After that, it enters Auto Mode automatically.

» How to enter Test Mode again:

Solution: Turn your wall switch off, then turn it on after 5 seconds.

» How to skip Test Mode and enter Auto Mode directly:

Solution: At Test Mode, turn off your wall switch, and then turn on. When the LED indicator flashes quickly 6 times, it shows that light enters Auto Mode successfully.

» How to keep the light at 40% brightness for all night and 100% when someone is around:

Solution: Use Auto Mode

» How to keep the light at 100% brightness for 7-9 hours at night:

Solution: Use Manual Mode

» How to enter Manual Mode at Auto Mode:

Solution: When dark or at night, make sure the light is on at Auto Mode, then turn off and on your wall switch. When the LED indicator flashes quickly 6 times, it shows that the light enters Manual Mode successfully.

» How to check if the light is still at or already returned to Auto Mode after light off at daytime:

Solution: Do not turn off your wall switch and the light automatically turns on at Auto Mode when dark or at night.

» How to exit Manual Mode and return to Auto Mode when light on at Manual Mode:

Solution: Turn your wall switch off and on. When LED indicator quickly flashes 3 times, it shows that the light enters Auto Mode and already exited Manual Mode.

Or wait till daytime, the light automatically turns off about 1 minute after being exposed to daylight and exits Manual Mode. At this time, LED indicator should quickly flash 3 times.