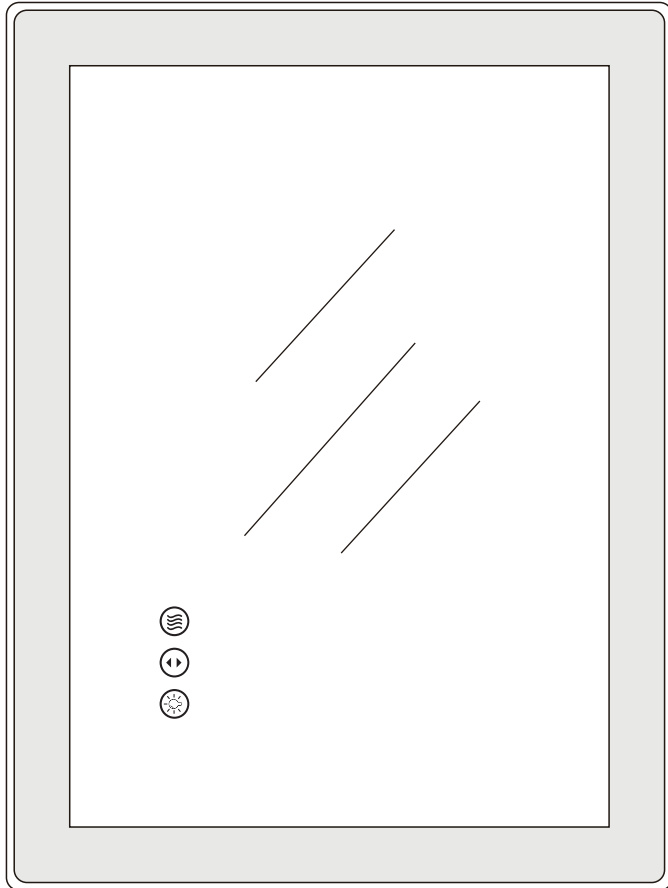


FRAMED LED MIRROR

With Front and Backlit



User Manual

Before Installation

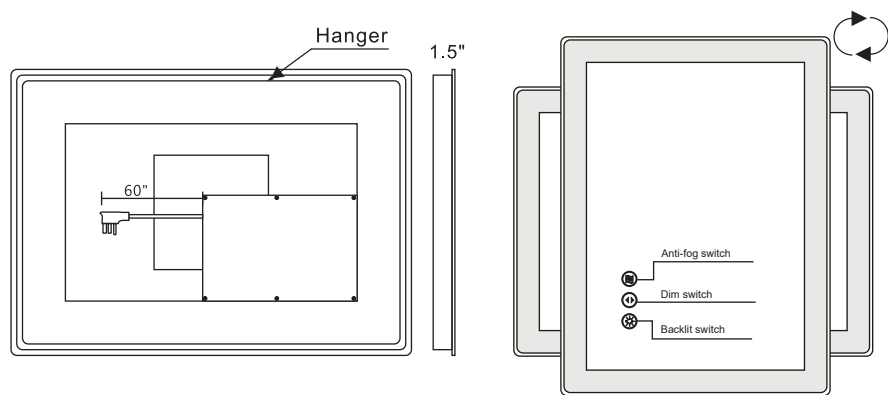
Thank you so much for choosing our mirrors, in order to facilitate the use of our products, please read this instruction carefully before installation.

Please Notice:

1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
3. Please power the mirror with plug to test all its functions before installing on the wall.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages 110V-120V. If the voltage exceeds 120V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.

Please check and make sure below functions work properly before installation ⏴

Product Functions



Horizontal/ Vertical Installation



Anti-fog switch: After connecting the power, the anti-fog function is already turned on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after it's turned on and close in 1 hour, so you can turn it on 10 minutes before taking a bath.



Dim switch: The LED light supports 10% to 100% brightness adjustment, just long press the button. This button has a memory function, the next time you open the mirror it will be in the same brightness it was in before it was last closed, which means that you don't have to touch the buttons each time.




Color temperature switch: The front and back lights all have three color temperatures that can be switched (3000K/4000K/6000K), just need to short press this button. And this button has a memory function as well.



Button Lighting Mode

State of Button Light	Meaning
White Light ON	Function is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

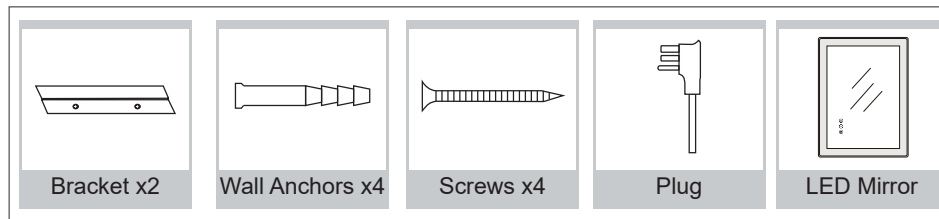Package Contents



Installation tools you may need

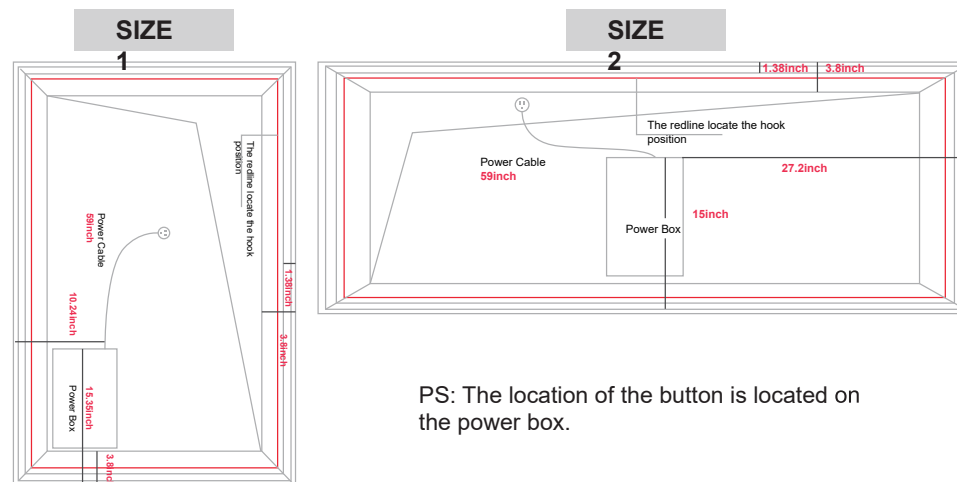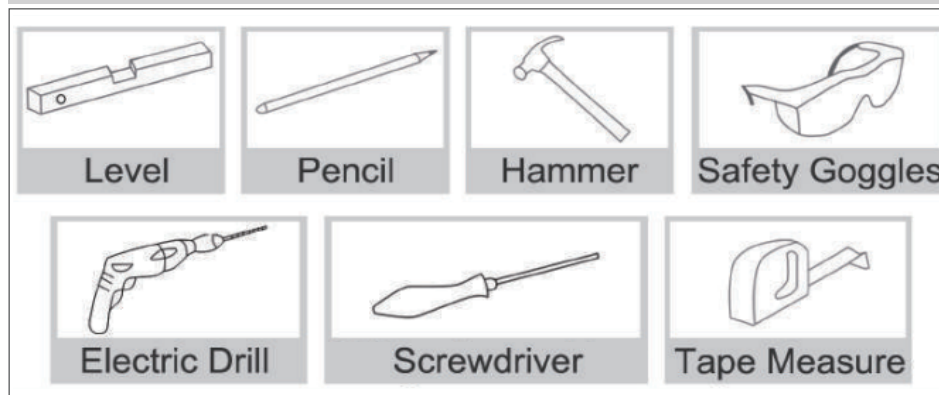

PS: The location of the button is located on the power box.









Product Specifications

Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power (W)	Input Voltage (V)	Weight (kg)
20" X 28"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6780	90	48	110V~, 50/60Hz	6.9
24" X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8220	90	60	110V~, 50/60Hz	8.8
24" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8943	90	60	110V~, 50/60Hz	9.68
28" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9376	90	60	110V~, 50/60Hz	11
28" X 60"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	14250	90	100	110V~, 50/60Hz	16.8
32" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12216	90	75	110V~, 50/60Hz	15.48
32" X 48"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	13611	90	100	110V~, 50/60Hz	15.4
32" X 72"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12210	90	150	110V~, 50/60Hz	22.5
36" X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	11304	90	75	110V~, 50/60Hz	12.09
36" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12216	90	75	110V~, 50/60Hz	15.48
36" X 48"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	14490	90	100	110V~, 50/60Hz	17.2
38" X 38"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	13093	90	75	110V~, 50/60Hz	14.88
40" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	11771	90	75	110V~, 50/60Hz	12.63
40" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12860	90	75	110V~, 50/60Hz	14.55
48" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	13326	90	75	110V~, 50/60Hz	16.84
48" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	15192	90	100	110V~, 50/60Hz	21.24
55" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	14250	90	100	110V~, 50/60Hz	19
55" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	15986	90	150	110V~, 50/60Hz	22.74
60" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	16102	90	150	110V~, 50/60Hz	19.84
60" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	16250	90	150	110V~, 50/60Hz	26.55
60" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	17525	90	150	110V~, 50/60Hz	28.97
72" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	18000	90	150	110V~, 50/60Hz	31.32
72" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	19990	90	150	110V~, 50/60Hz	34.32
84" X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	22380	90	150	110V~, 50/60Hz	32.9
84" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	22424	90	150	110V~, 50/60Hz	41.13
96" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	18620	90	150	110V~, 50/60Hz	43
110" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	27634	90	150	110V~, 50/60Hz	55.12

Product Specifications

Parameter	Specification
Switch	Touch Sensor Switch
LED Color Change	Yes
LED Dimming	Yes
Memory	Yes
Anti-fog	Yes
Waterproof	IP54
Safety Compliance	ETL
Glass Thickness	5 MM
Glass Material	Tempered Glass
Cable Length	1.5 M
Power Source	Hardwired / Plug in
Mounting Type	Wall Mounted
Mounting Method	French Cleat Mounting
Orientation	Horizontal / Vertical
Warranty	3-Year Manufacturer

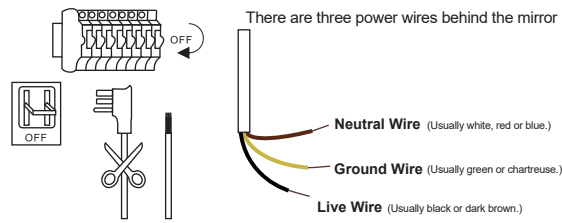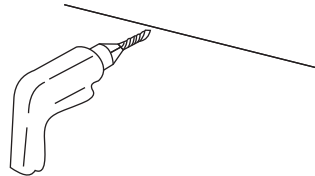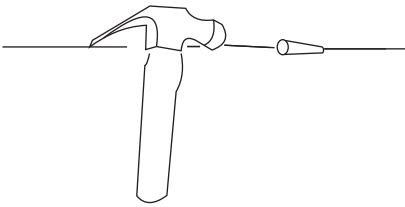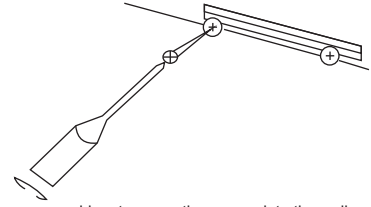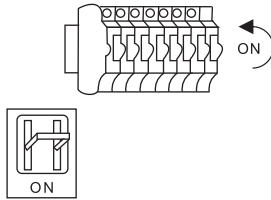Installation Instruction

Method 1: Plug in	Method 2: Hardwire
 <p>Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.</p>	 <p>There are three power wires behind the mirror</p> <p>Neutral Wire (Usually white, red or blue.) Ground Wire (Usually green or chartrouse.) Live Wire (Usually black or dark brown.)</p> <p>Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).</p>
<p>Step 1</p>  <p>Draw a straight line with a ruler to keep the mirror horizontal</p>	<p>Step 2</p>  <p>Use a electric drill to punch four holes at the marked spots.</p>
<p>Step 3</p>  <p>Apply wall anchors with hammer.</p>	<p>Step 4</p>  <p>Use a screwdriver to screw the screws into the wall anchors.</p>
<p>Step 5</p>  <p>Hang the mirror on the wall</p>	<p>Step 6</p>  <p>Turn on the power.</p>

Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the power box on the back of the mirror and test the power cables, tighten the cables if they are loose. (Please cut off the power firstly before testing the power supply and cables).
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.

Manufacturer: Zhongshan Chengjiang Glass Technology Co., Ltd.
Address: Jichang Village, Dongfeng Town, Zhongshan City, Guangdong Province, China
Contact us: Chengjiang_Glass_Technology@outlook.com

