



1. Install the arms 1 on the plate 3 with lock nut & teeth lock washer 2, after that adjust the arms to suitable position.

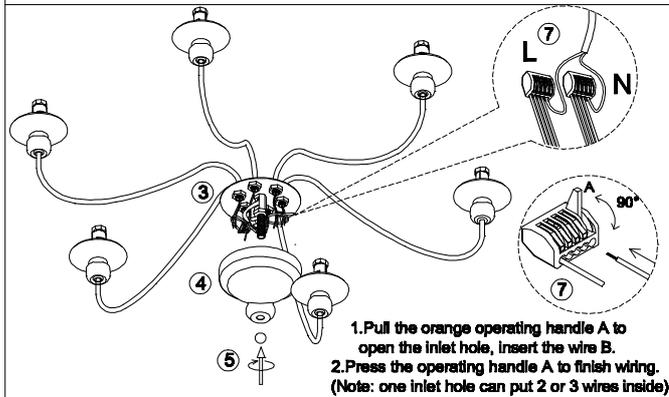


1. Pull the orange operating handle A to open the inlet hole, insert the wire B.
2. Press the operating handle A to finish wiring.
(Note: one inlet hole can put 2 or 3 wires inside)


2. Connect all the wires by parallel with connectors 7 (all live line-L use one connector, and neutral Line-N use another connector).
3. Install the box 4 to the plate 3 with end cap 5.

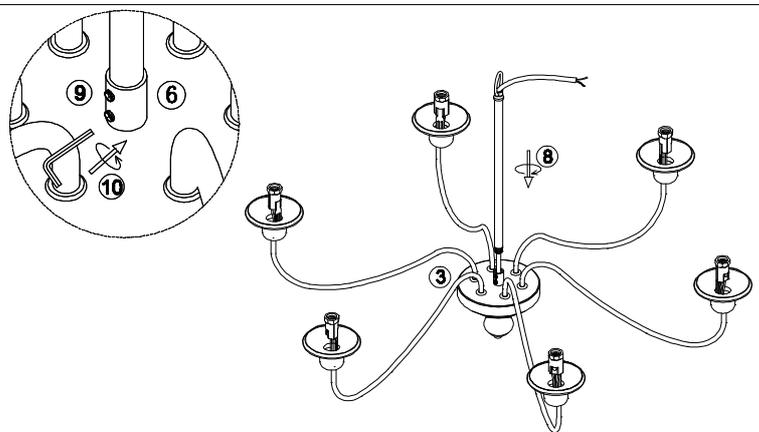

4. Let the wire go through the hanging tube 3, rotate to fasten the tube 3 to the threaded rod 6, lock the tube 3 with grub screw 9 by rotate hex key 10.

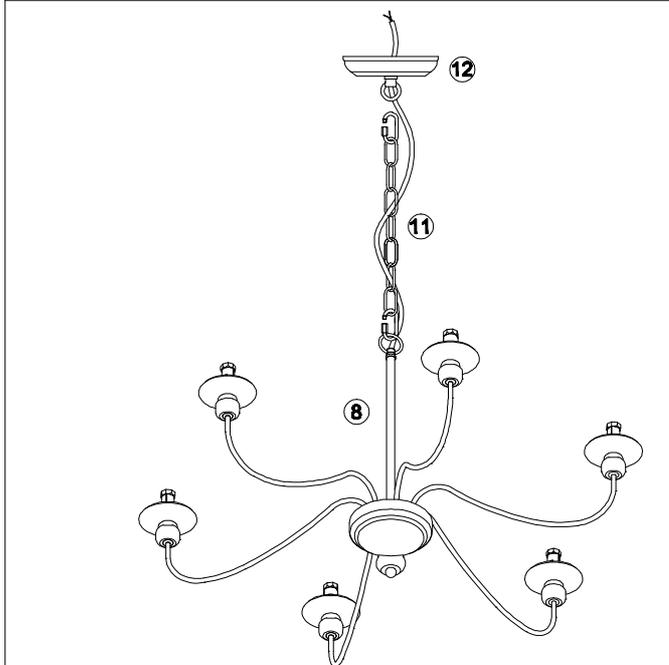

5. Connect the fixture 8 and the canopy 12, let the wire go through the chain 11 and canopy 12.

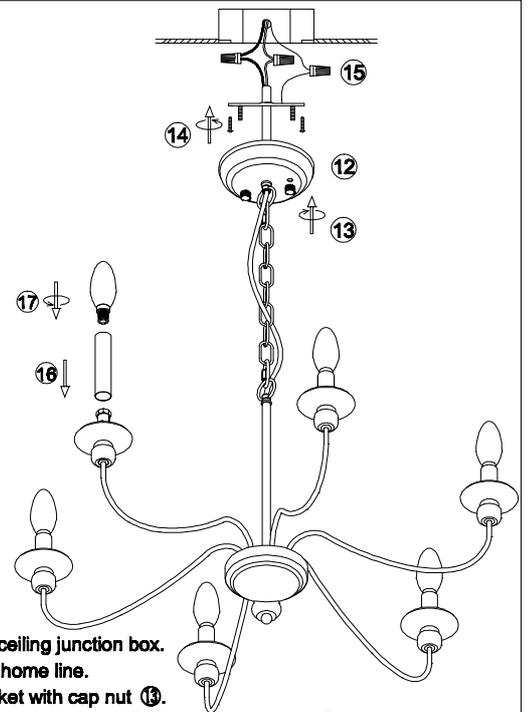

6. Install the bracket 14 to the ceiling junction box.
7. Connect the wire 15 to your home line.
8. Install the fixture to the bracket with cap nut 13.
9. Put the cylinder tubes 16 on the lampholder and install the bulbs 17.

D0141/6/8

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !