












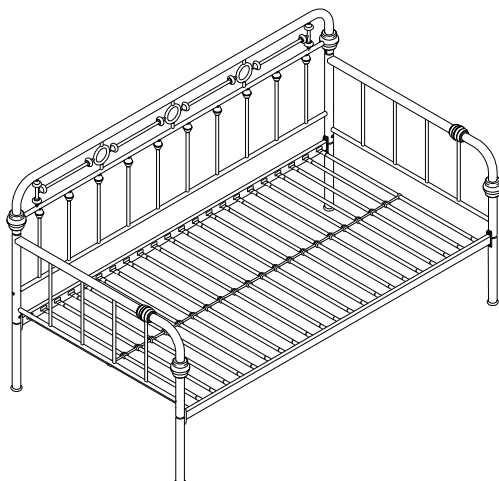


ASSEMBLY INSTRUCTION

METAL TWIN DAYBED


A Left Arm Post Leg	B Right Arm Post Leg	C LSF Arm	D RSF Arm
			
E 2PCS Back Frame	F 2PCS Rail	G 1PC Slat	H 1PC Slat Connector
			
I 1PC Slat Spacer	J 2PCS Bolt 1/4" x 55mm	K 22PCS Bolt 1/4" x 16mm	L 44PCS Bolt 5/16" x 19mm
			
M 21PCS L-Allen Key 4mm	2PCS	6PCS	8PCS
			
1PC			




This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

1

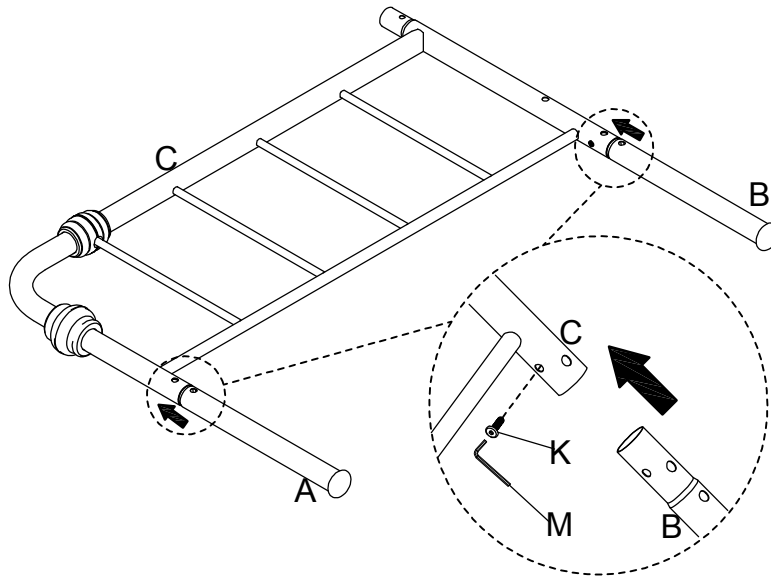
Attach Left & Right Arm Post Leg (A & B) to LSF Arm (C) using Bolt (K) with L-Allen Key (M).

**2**

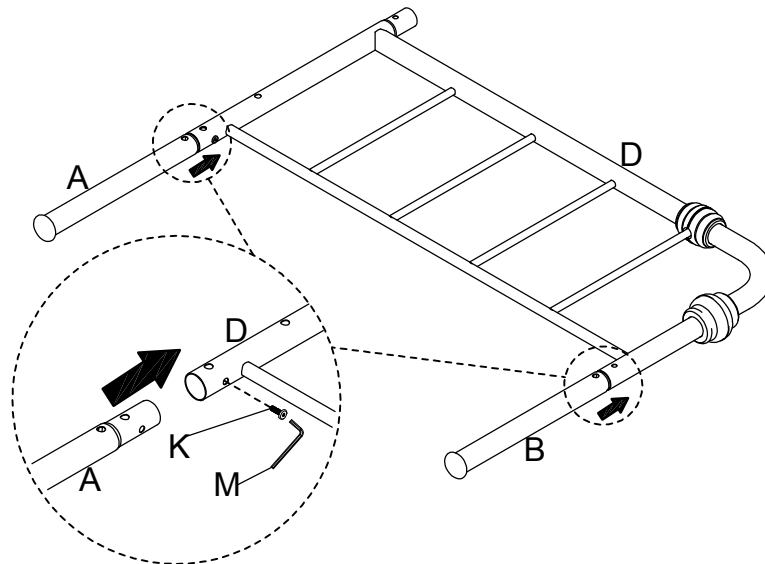Attach Left & Right Arm Post Leg (A & B) to RSF Arm (D) using Bolt (K) with L-Allen Key (M).


**3**

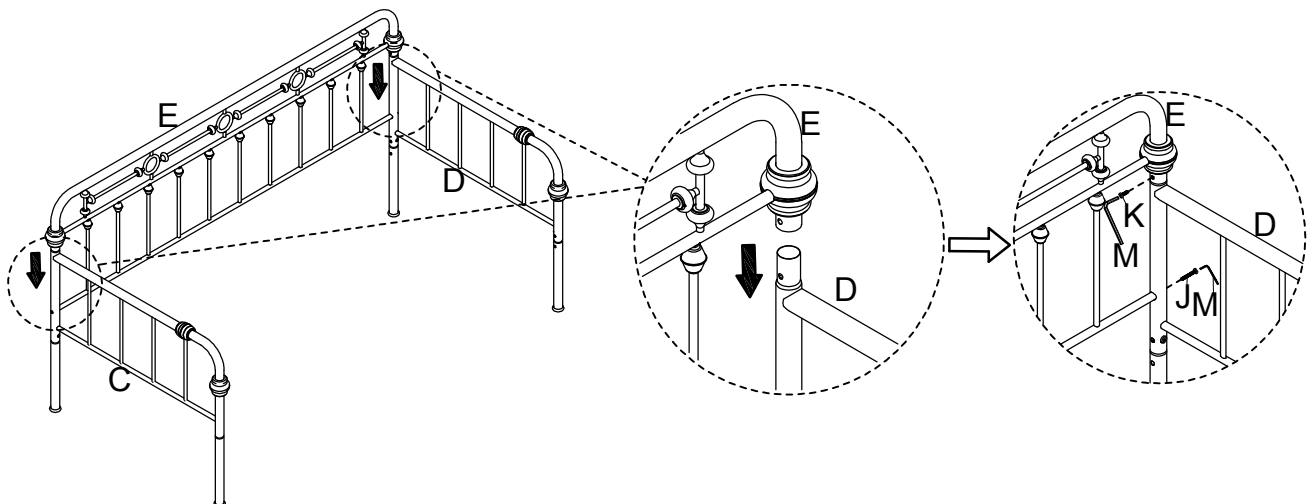Attach Back Frame (E) to LSF & RSF Arm (C & D) using Bolt (K & J) with L-Allen Key (M).




4

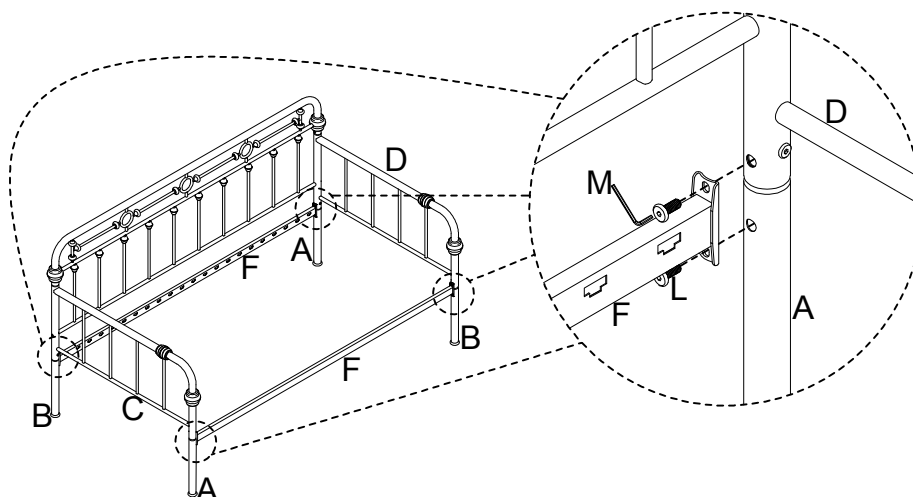Attach Rail (F) to LSF & RSF Arm (C & D) and Left & Right Arm Post Leg (A & B) using Bolt (L) with L-Allen Key (M).




5

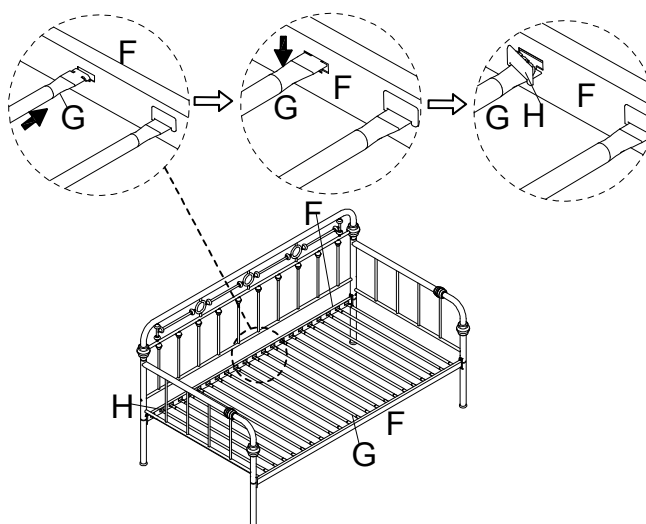Insert Slat (G) into Rail (F) as shown. Then lock Slat Connector (H) to fix Slat (G).



6

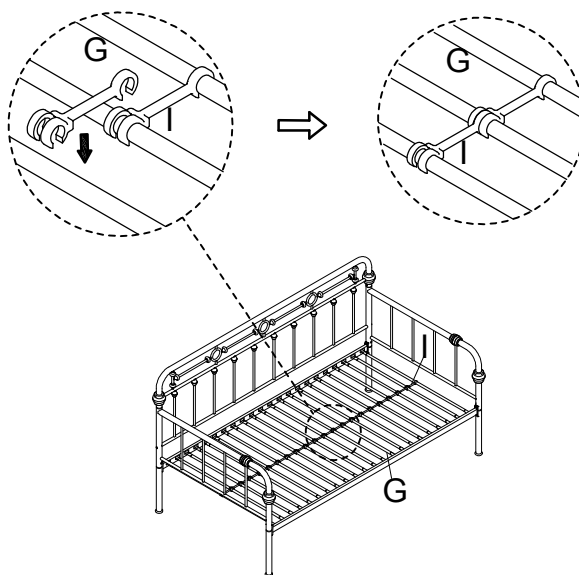Connect Slat (G) using Slat Spacer (I) as shown.















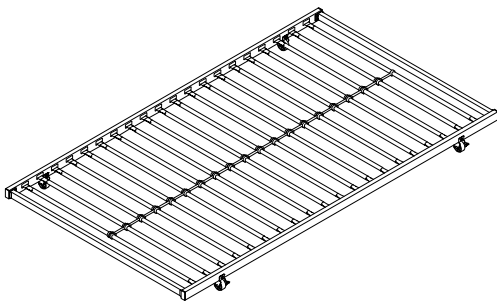
Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

ASSEMBLY INSTRUCTION

METAL TWIN/FULL DAYBED TRUNDLE


A	Long Rail	B	Short Rail	C	Caster with Brake	D	Caster
							
E	2PCS Slat	F	2PCS Slat Connector	G	2PCS Slat Spacer	H	2PCS Bolt 1/4" x 33mm
							
I	20PCS Bolt 1/4" x 16mm	J	40PCS Nut 1/4"	K	19PCS L-Allen Key 4mm	L	4PCS Wrench 1/4" x 5/16"
							
8PCS		4PCS		1PC		1PC	




This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

1

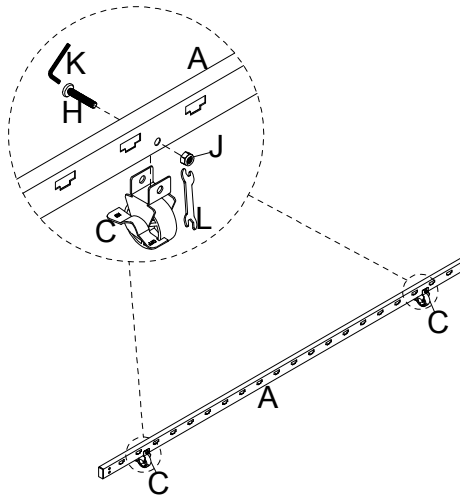
Attach Caster with Brake (C) to Long Rail (A) using Bolt (H) and Nut (J) with L-Allen Key (K) and Wrench (L).

**2**

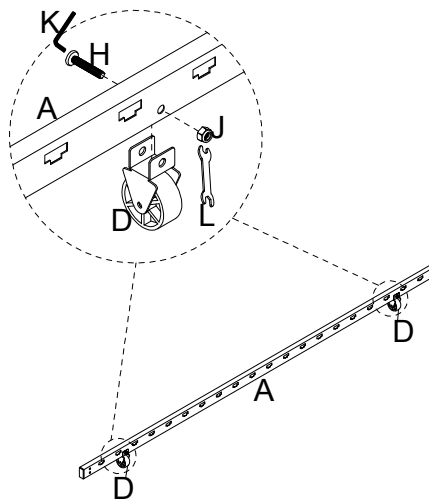Attach Caster (D) to Long Rail (A) using Bolt (H) and Nut (J) with L-Allen Key (K) and Wrench (L).


**3**

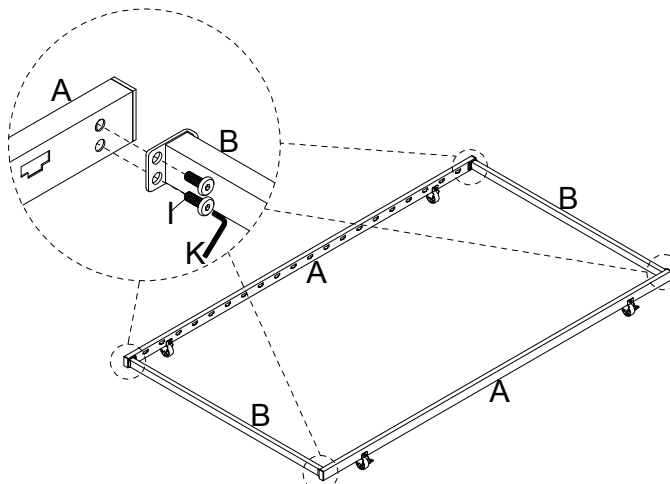Attach Long Rail (A) to Short Rail (B) using Bolt (I) with L-Allen Key (K).




4

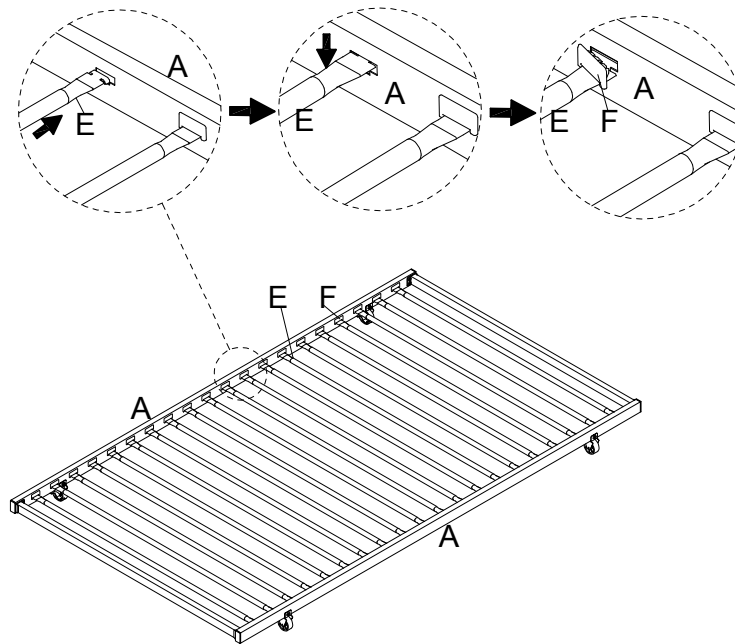Insert Slat (E) into Long Rail (A) as shown. Then lock Slat Connector (F) to fix Slat (E).



5

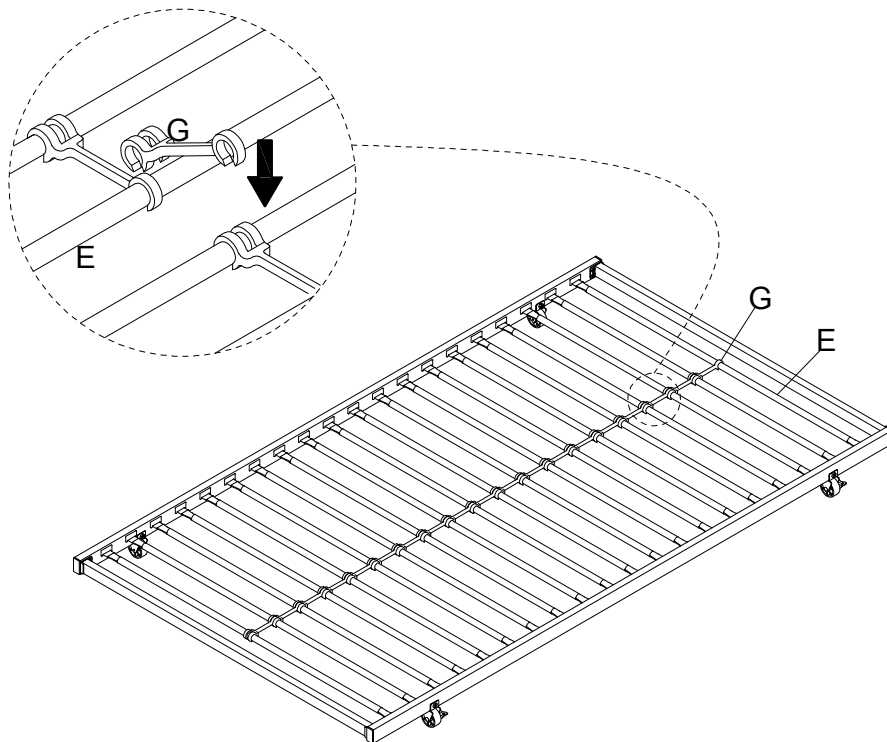Connect Slat (E) using Slat Spacer (G) as shown.



Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.