





Note: male A should connect with female A, male B should connect with female B ( C with C, D with D).

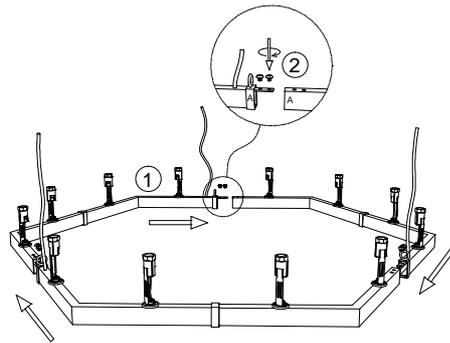

1. Combine the light fixture ① together and fasten it with screw ②.

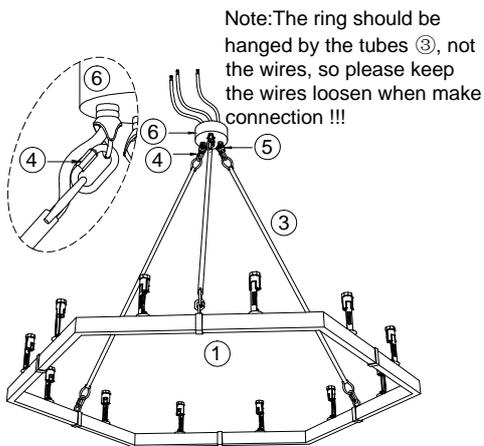


2. Let the wire go through the tube ③, hang the fixture to the junction box ⑥ with the carabiner hook screw connection ④ of hanging tube ③, let the wire go through the junction box ⑥.

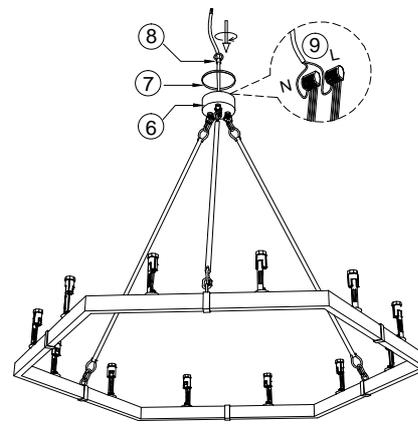


1. Pull the orange operating handle A to open the inlet hole, insert the wire B.  
2. Press the operating handle A to finish wiring.  
(Note: one inlet hole can put 2 or 3 wires inside)

3. Connect all the wires by parallel with connectors ⑨ (all live line-L use one connector, and neutral Line-N use another connector).  
4. Let the wire go through the top cover ⑦ and ring ⑧, rotate the ring ⑧ to close the top cover ⑦ to the fixture.

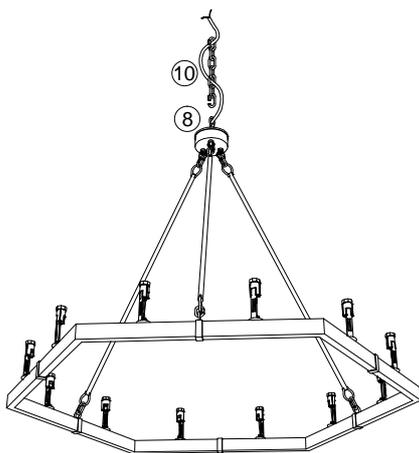

5. Hang the chain ⑩ to the fixture with ring ⑧, let the wire go through the chain ⑩.

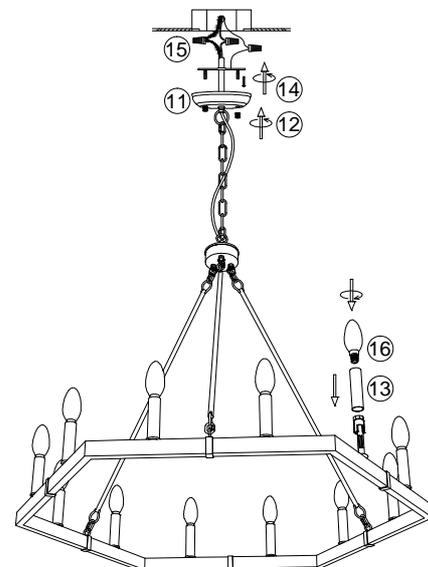

6. Install the bracket to the ceiling junction box with screw ⑭.  
7. Connect the wire to your home line with cap connector ⑮.  
8. Install the fixture to the bracket with cap nut ⑫.  
9. Put the cylinder tube ⑬ to the bulb holder and install the bulb ⑯.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !