


WARNING (To reduce the risk of fire, electric shock, or personal injury):






- 1. We suggest installation by a **licensed electrician**.
- 2. Please read the instruction carefully and save it as you may need it at a later time.
- 3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
 - » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the **“OFF”** position.
 - » Place the wall switch in the **“OFF”** position.
- 4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
- 5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
- 6. Make sure the voltage you are using is **120V**. The maximum wattage is **LED, 28W**.
- 7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
- 8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

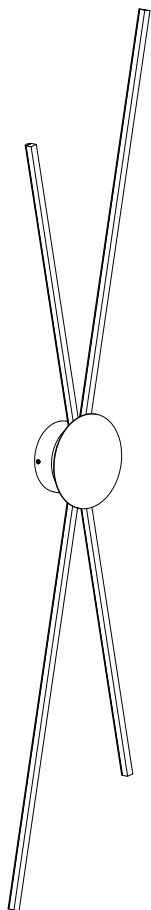

TOOLS REQUIRED (NOT INCLUDED):

Before starting assembly and installation please prepare the needed tools as below picture


				
Ladder	Philips Head or Flat Blade Screwdriver	Electrical Tape	Pliers	Wire Cutter/Stripper

PARTS INCLUDING:

- (C) Green ground screw (1)
- (D) Mounting plate (1)
- (E) Back plate assembly (1)
- (F) Stud (2)
- (G) Iron disk (1)
- (H) Screw (6)
- (I) Iron sheet (1)
- (J) Body-A (2)
- (K) Body-B (2)


ACCESSORIES ENCLOSED:

- (A) Mounting screw (2)
- (B) Plastic wire connector (3)

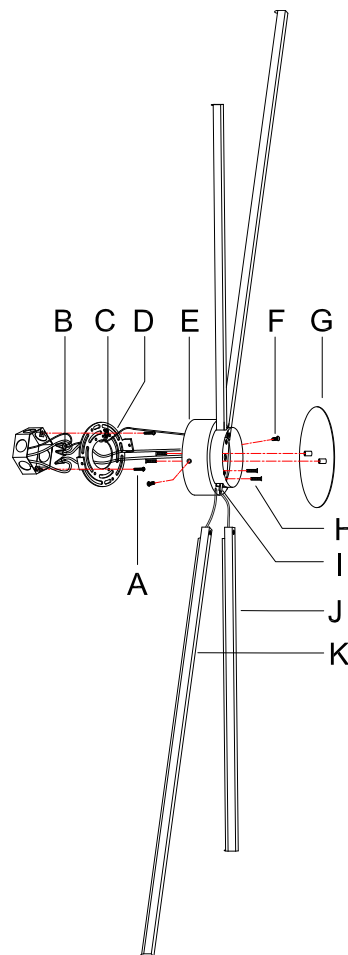

ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.
2. Make pre-installation

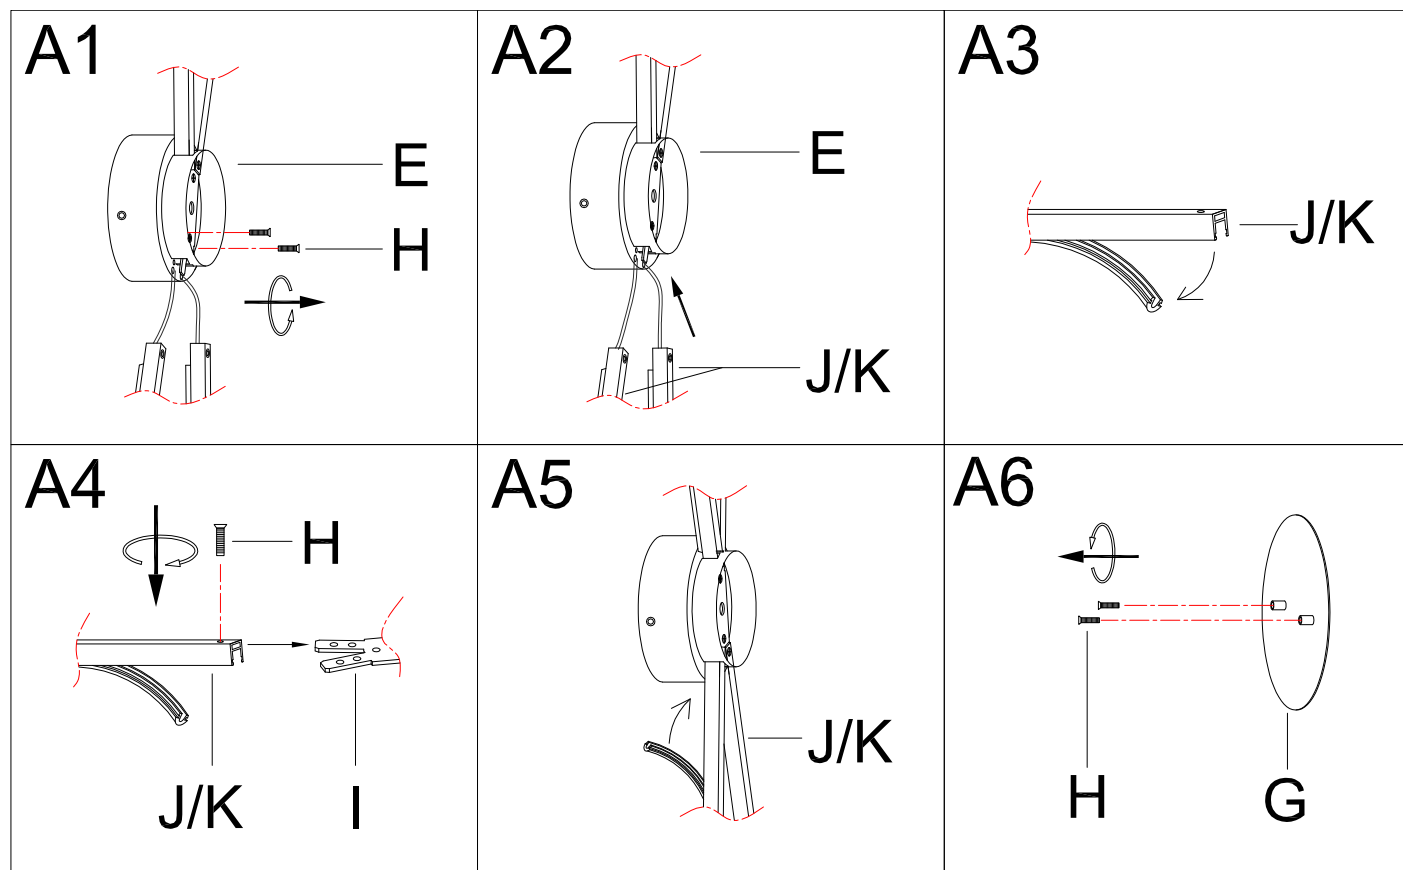

Step A1 » Remove screws (H) on the iron sheet (I) out.


Step A2 » Carefully tuck the wires from bodies (J & K) into the back plate assembly (E).

- **Please take care not to scratch the wires.**

Step A3 » Open the silicone end of the bodies (J & K) which is close to back plate assembly (E).

Step A4 » 1) Insert the upper slots of bodies (J & K) into iron sheet (I) until holes in bodies (J & K) align with inner holes in iron sheet (I).

- The position of the slot is shown in the figure on the right.
 - **When inserting bodies (J & K) into back plate assembly (E), you can gently shake bodies up and down by hand while inserting them. This will make the installation easier.**
- 2) Screw the removed screws (H) into the holes to secure the unit.

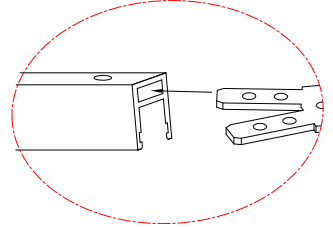

Step A5 » Restore the previously opened silicone to its original position.


- You can insert the head of silicone first, and then squeeze both sides back to their original position.

Step A6 » Remove screws (H) on the iron disk (G) out.

3. Turn off power

Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.

- » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the **“OFF”** position.
- » Place the wall switch in the **“OFF”** position.

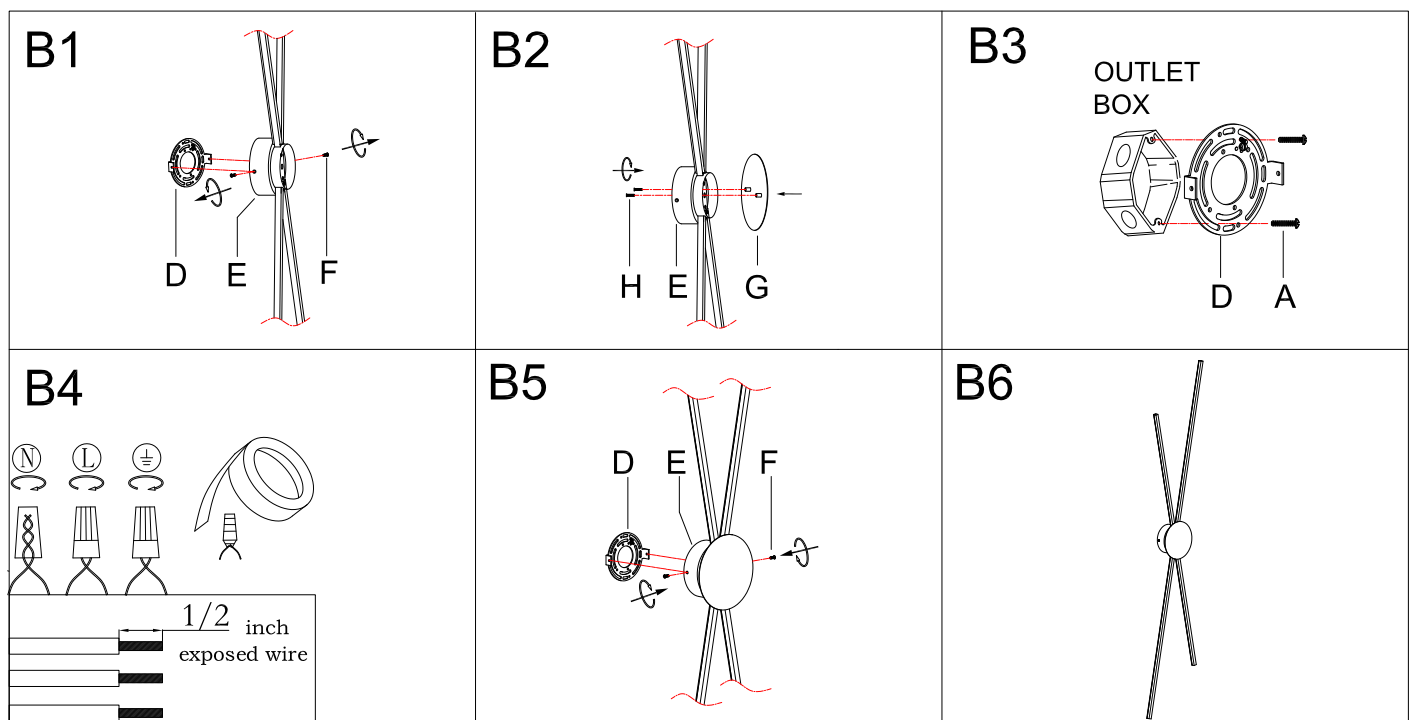

Step B1 » Unscrew studs (F) from back plate assembly (E) and mounting plate (D), then set them aside for later installation.


Step B2 » Align threads on the iron disk (G) with holes in back plate assembly (E), and then screw screws (H) into holes to secure them as shown in the illustration.

Step B3 » Carefully pass the supply wires from the outlet box through mounting plate (D).
Secure mounting plate (D) to the outlet box with mounting screws (A).

Step B4 » Make wire connections

Connect wires as below wires connection shown. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**

Connect ground wires according to the below chart

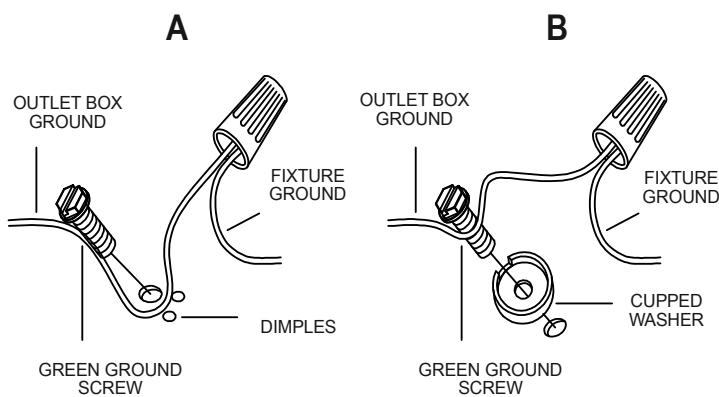

Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

* Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

The diagram shows a neutral wire connection where the neutral wire is connected to the outlet box ground via a green ground screw. The connection is made by passing the wire through a dimple in the mounting plate. Label: Neutral Wire.

Twist wires together with plastic wire connectors until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

Step A4 » Align the holes on both sides of back plate (E) and mounting plate (D), then secure them with the previously removed studs (F).

Step A5 » Check everything is installed properly, then you could turn on the light. Enjoy

ORDERING PARTS.

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

CLEANING.

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.