


CANOPY INSTALLATION INSTRUCTIONS

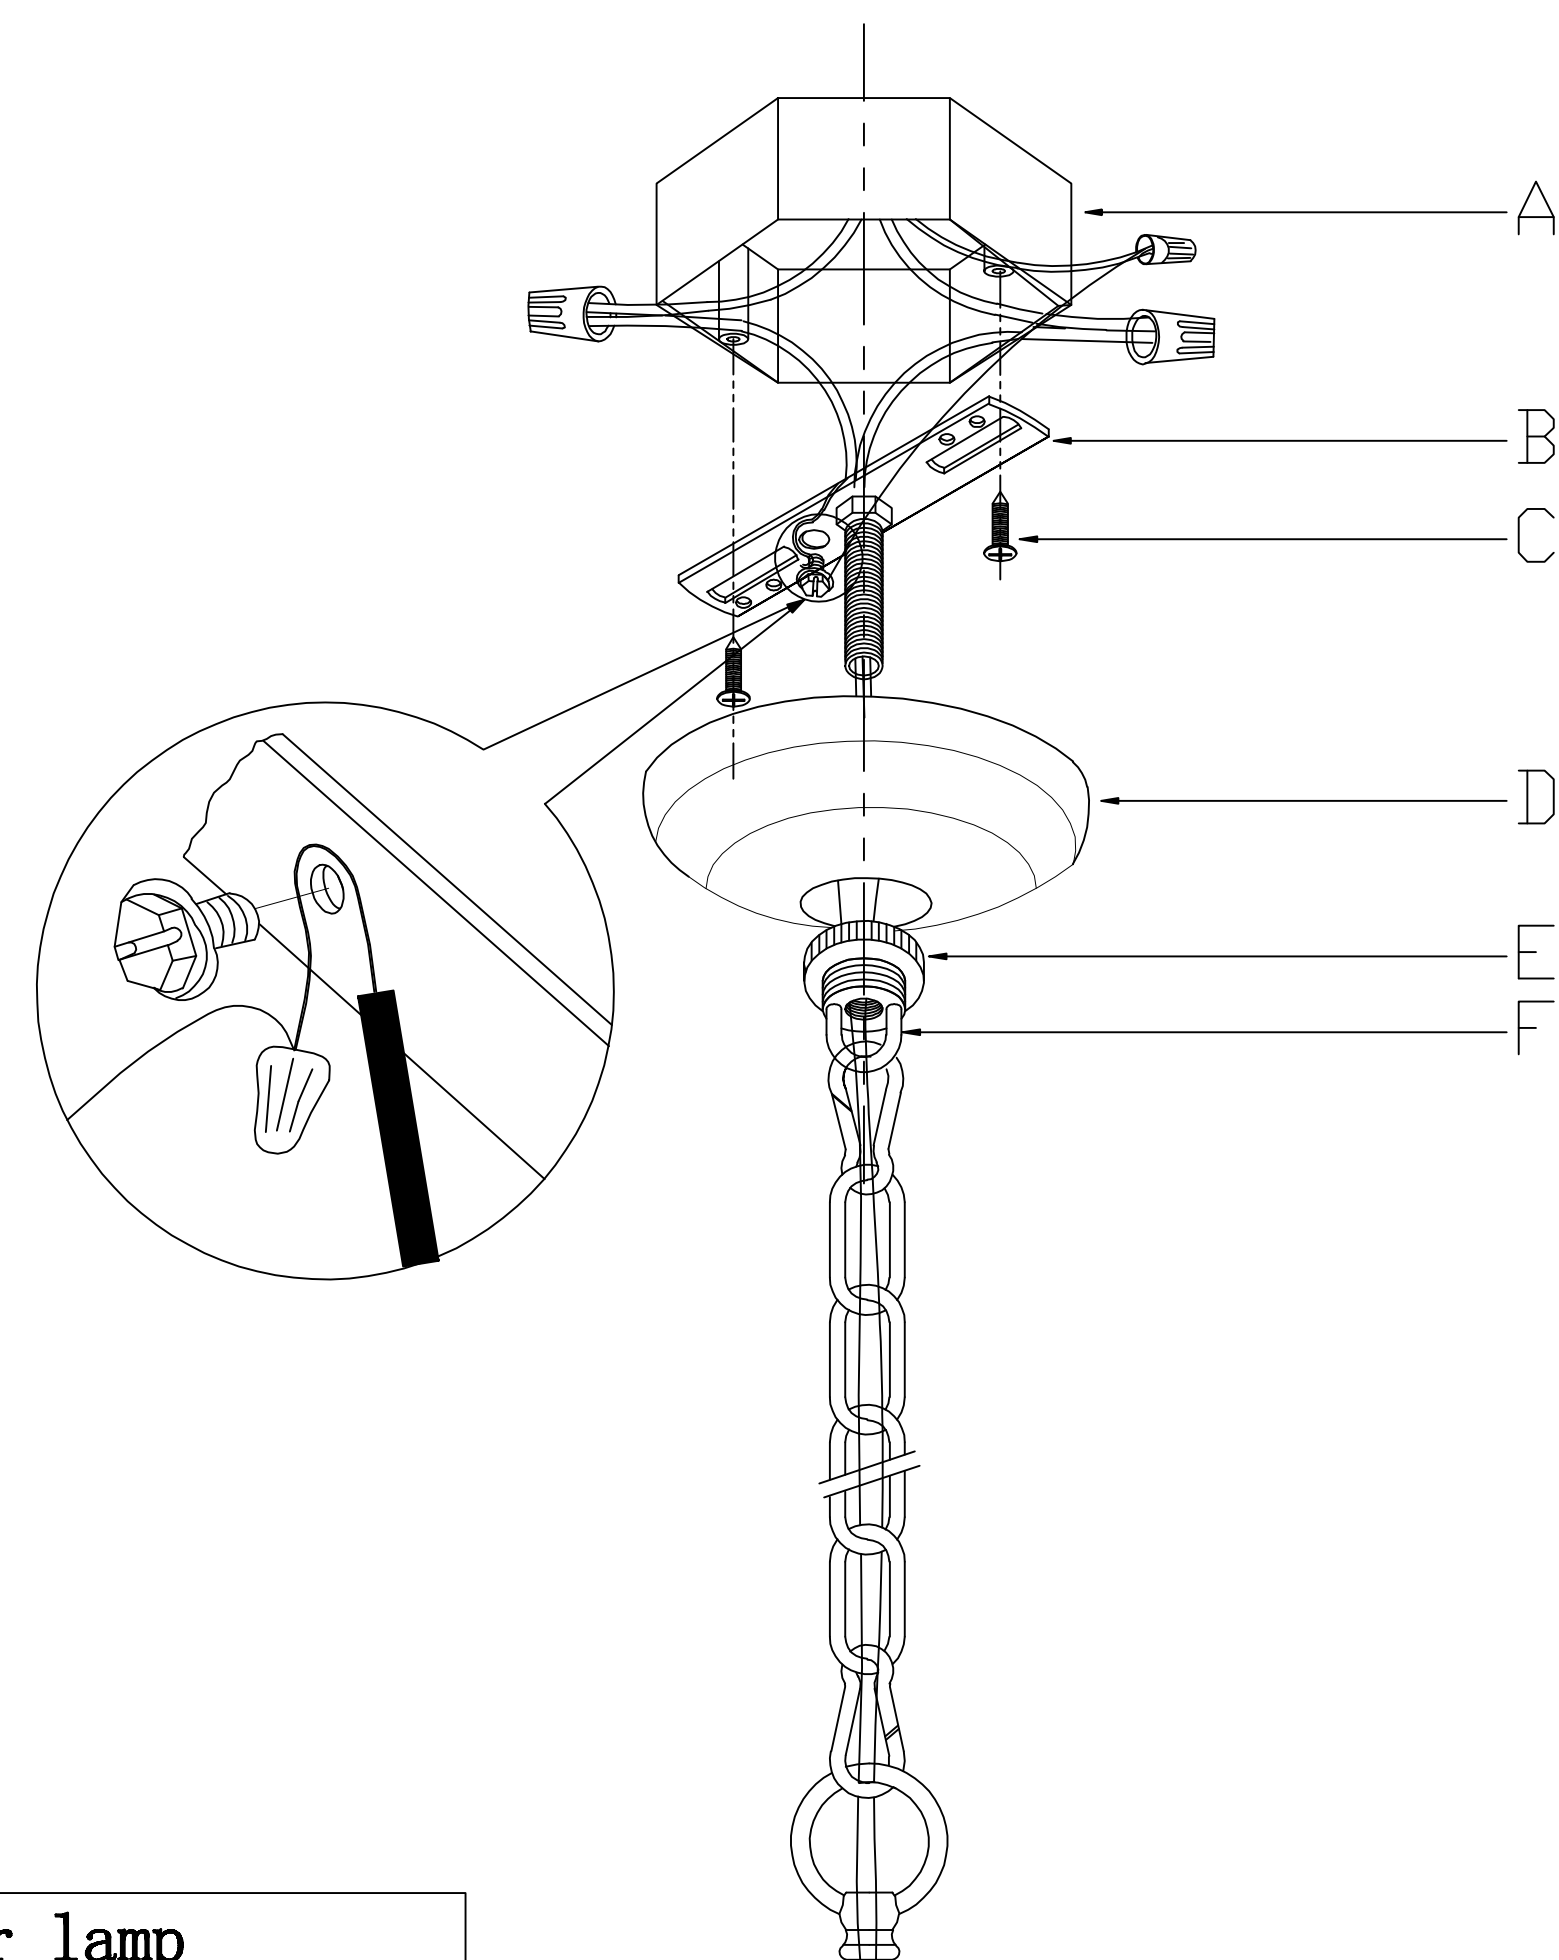


Attentions for lamp installation:


- 1. Please read the user manual carefully before the installation.
- 2. Please hire the professional electrician to install the lamp.
- 3. The load-bearing of the customer' s ceiling must be over 3 times of the light weight.
- 4. The power must be cut off until the whole lamp is installed well.
- 5. To avoid getting an electric shock and cause the unnecessary hurt, please cut off the power when cleaning the lamp.

- | | | |
|----------------------------|-------------------------|--------------------|
| A. Existing Electrical Box | B. Crossbar | C. Crossbar Screws |
| D. Canopy | E. Canopy Loop Nut lock | F. Canopy Loop |

Light Bulb

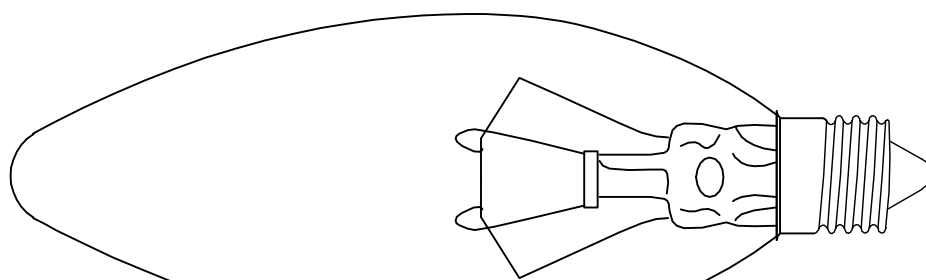


E12




Buckle is used to connect the chain and loop or adjust the length of chain.

USER MANUAL FOR MODEL# HG8986

Light Bulb:E12 light:E12*6
(Rated 110-130V/60Hz, bulb 40W-60W maximum.)

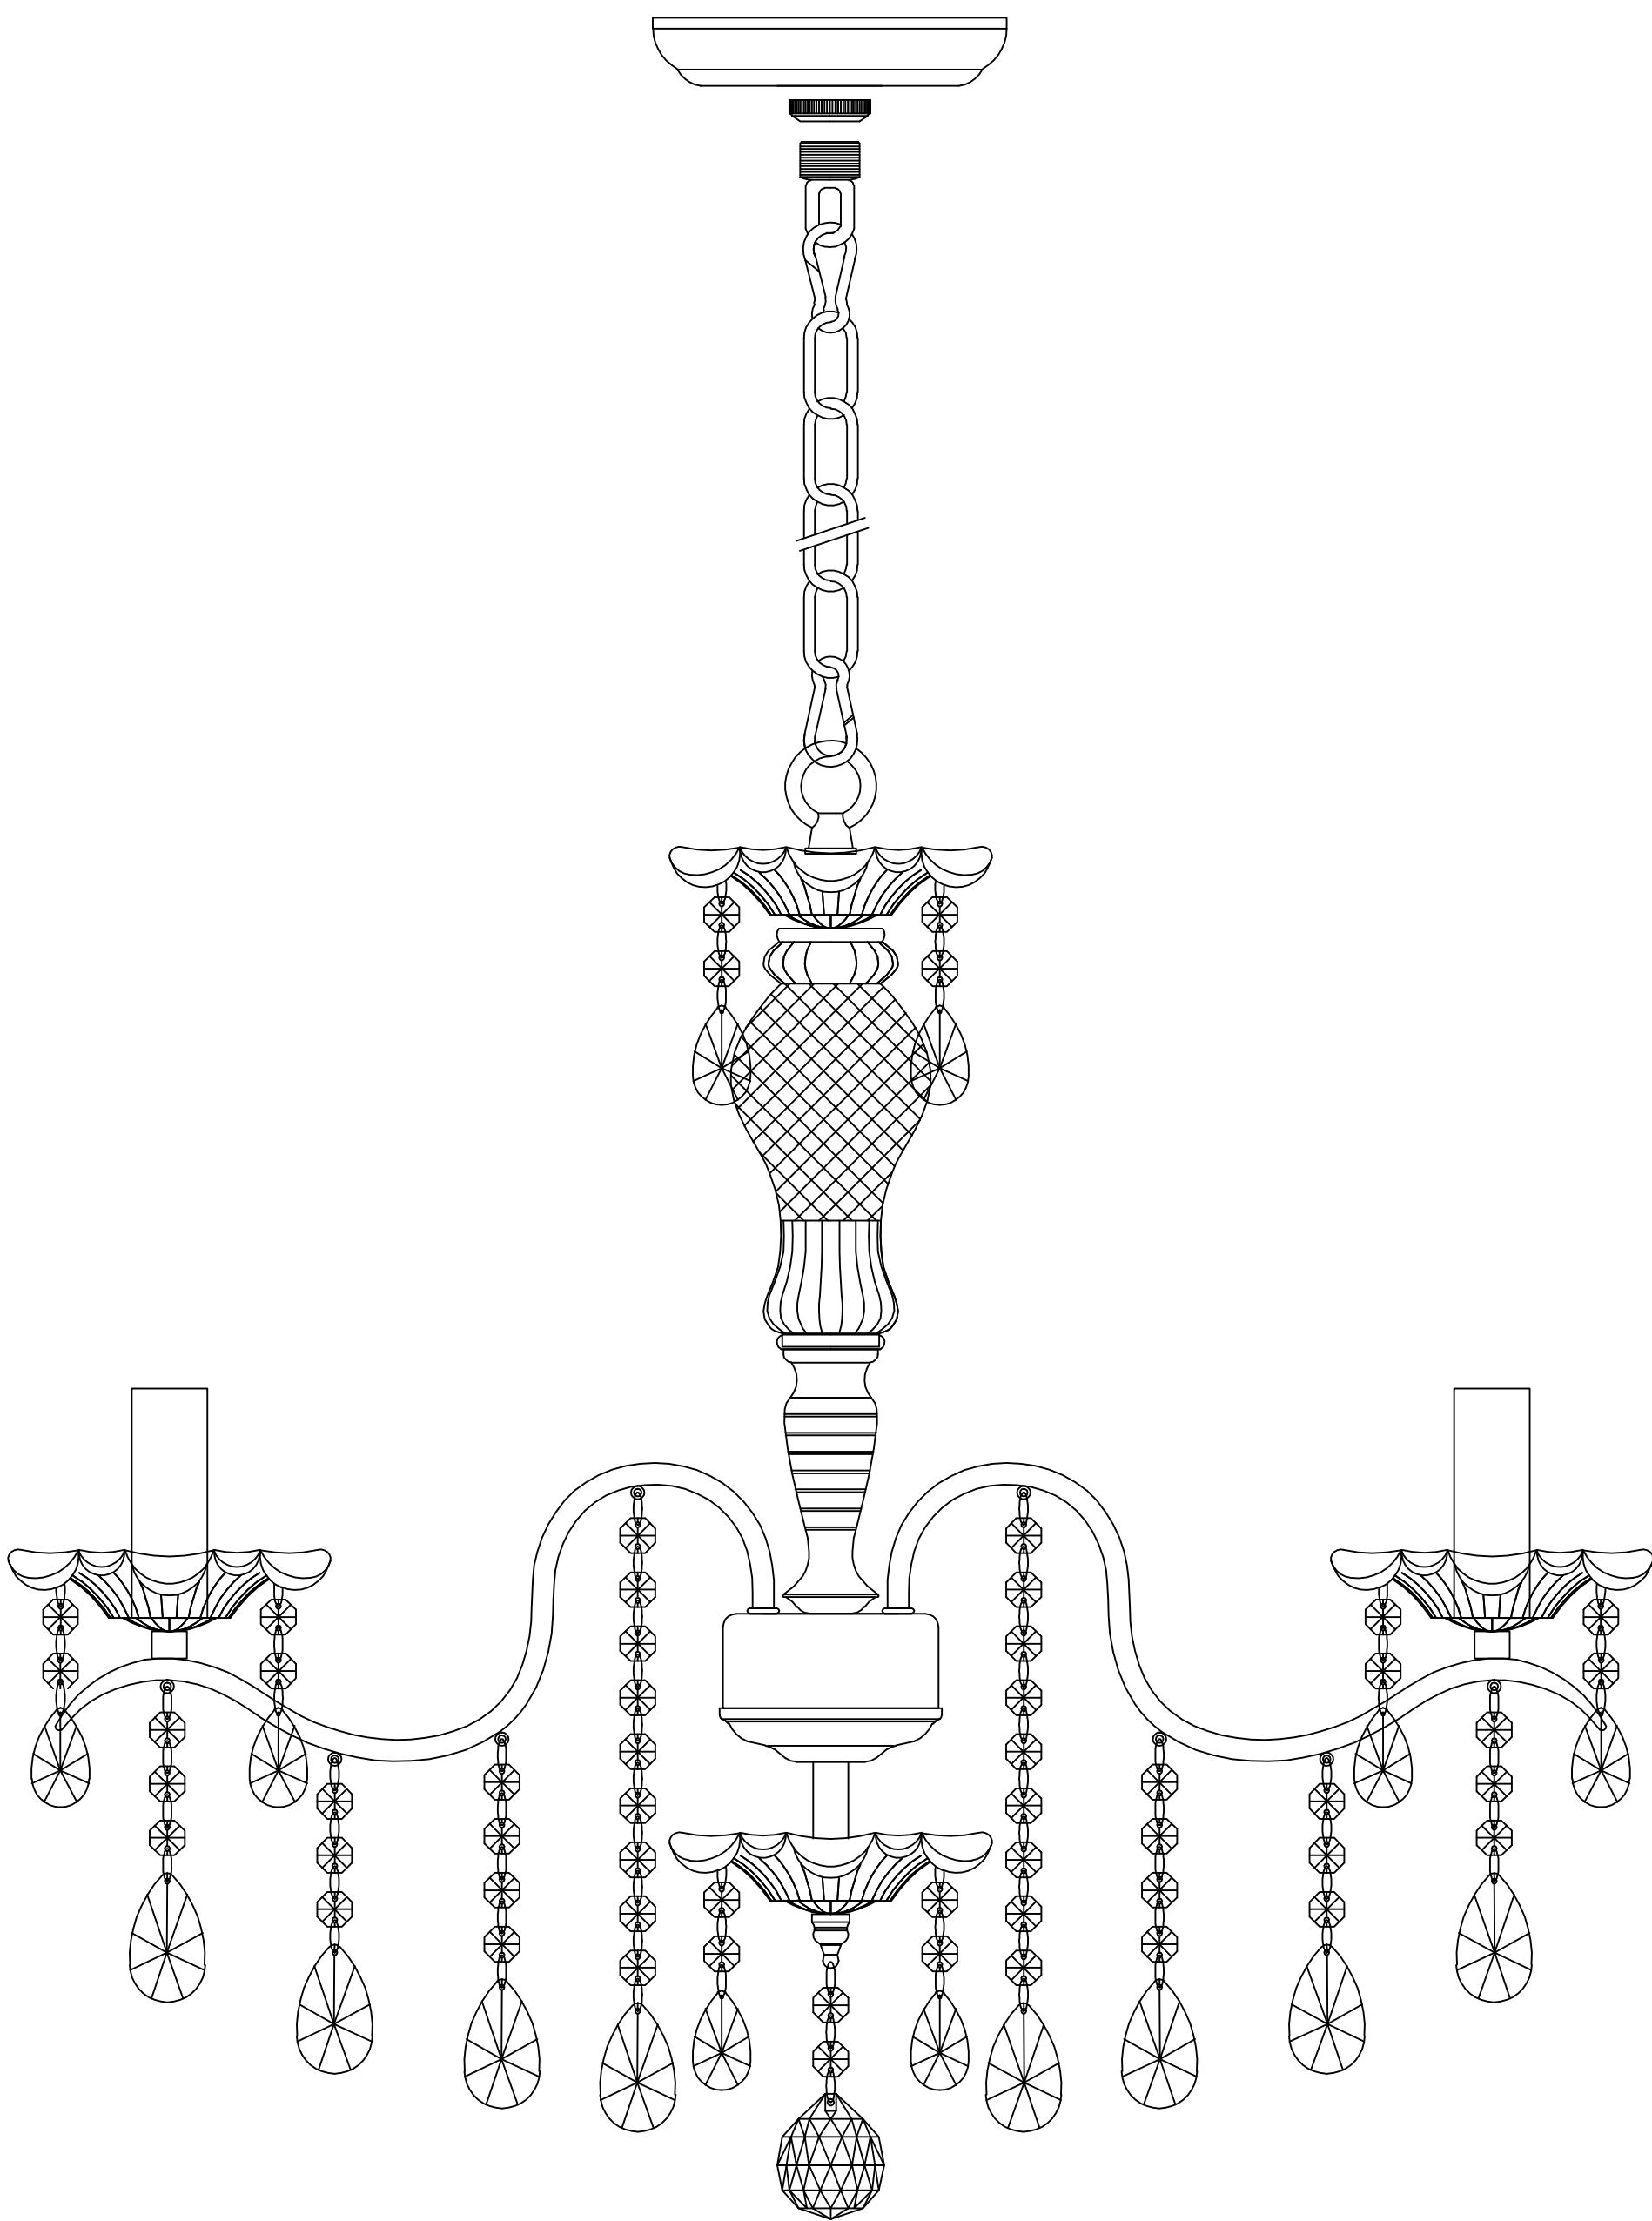


Please note: The parts in this table are completely unassembled, for illustrative purpose. In the actual product that you receive, some parts are assembled and attached together.

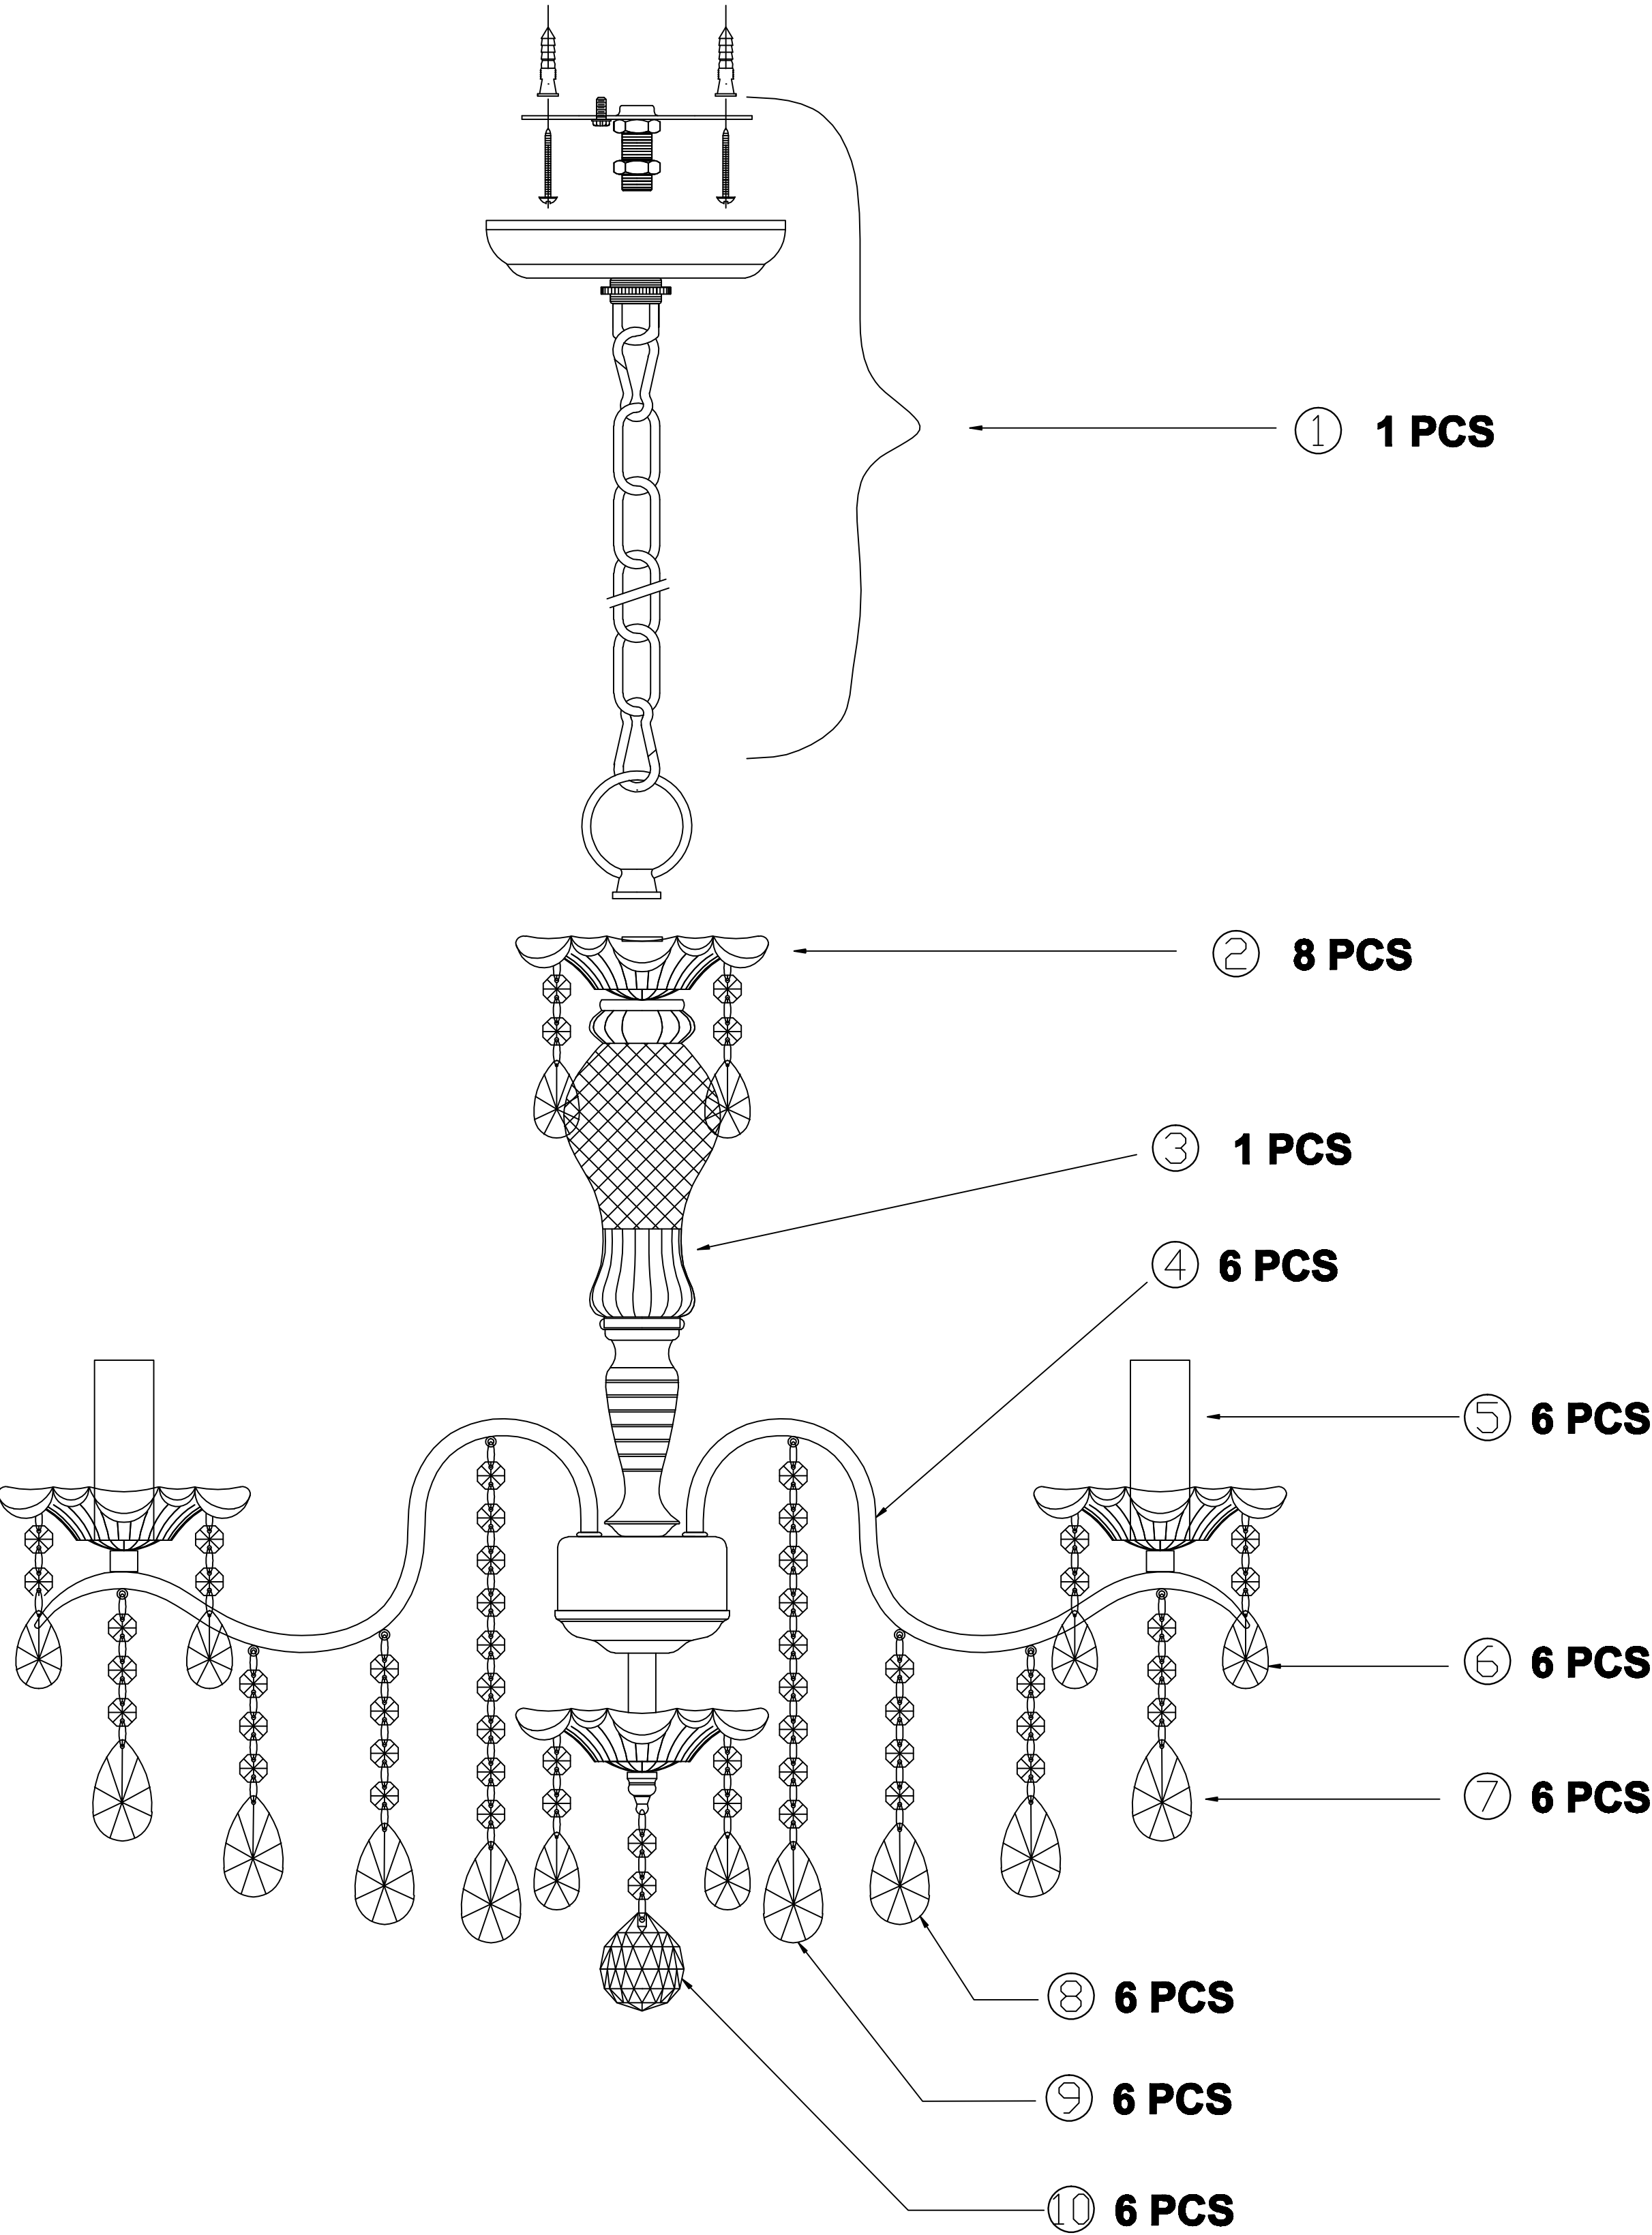

Products list

NO.	Picture	Quantity
1		1 PCS
2		8 PCS
3		1 PCS
4		6 PCS
5		6 PCS
6		32 PCS
7		12 PCS
8		6 PCS
9		6 PCS
10		1 PCS

Assembly and Installation Steps

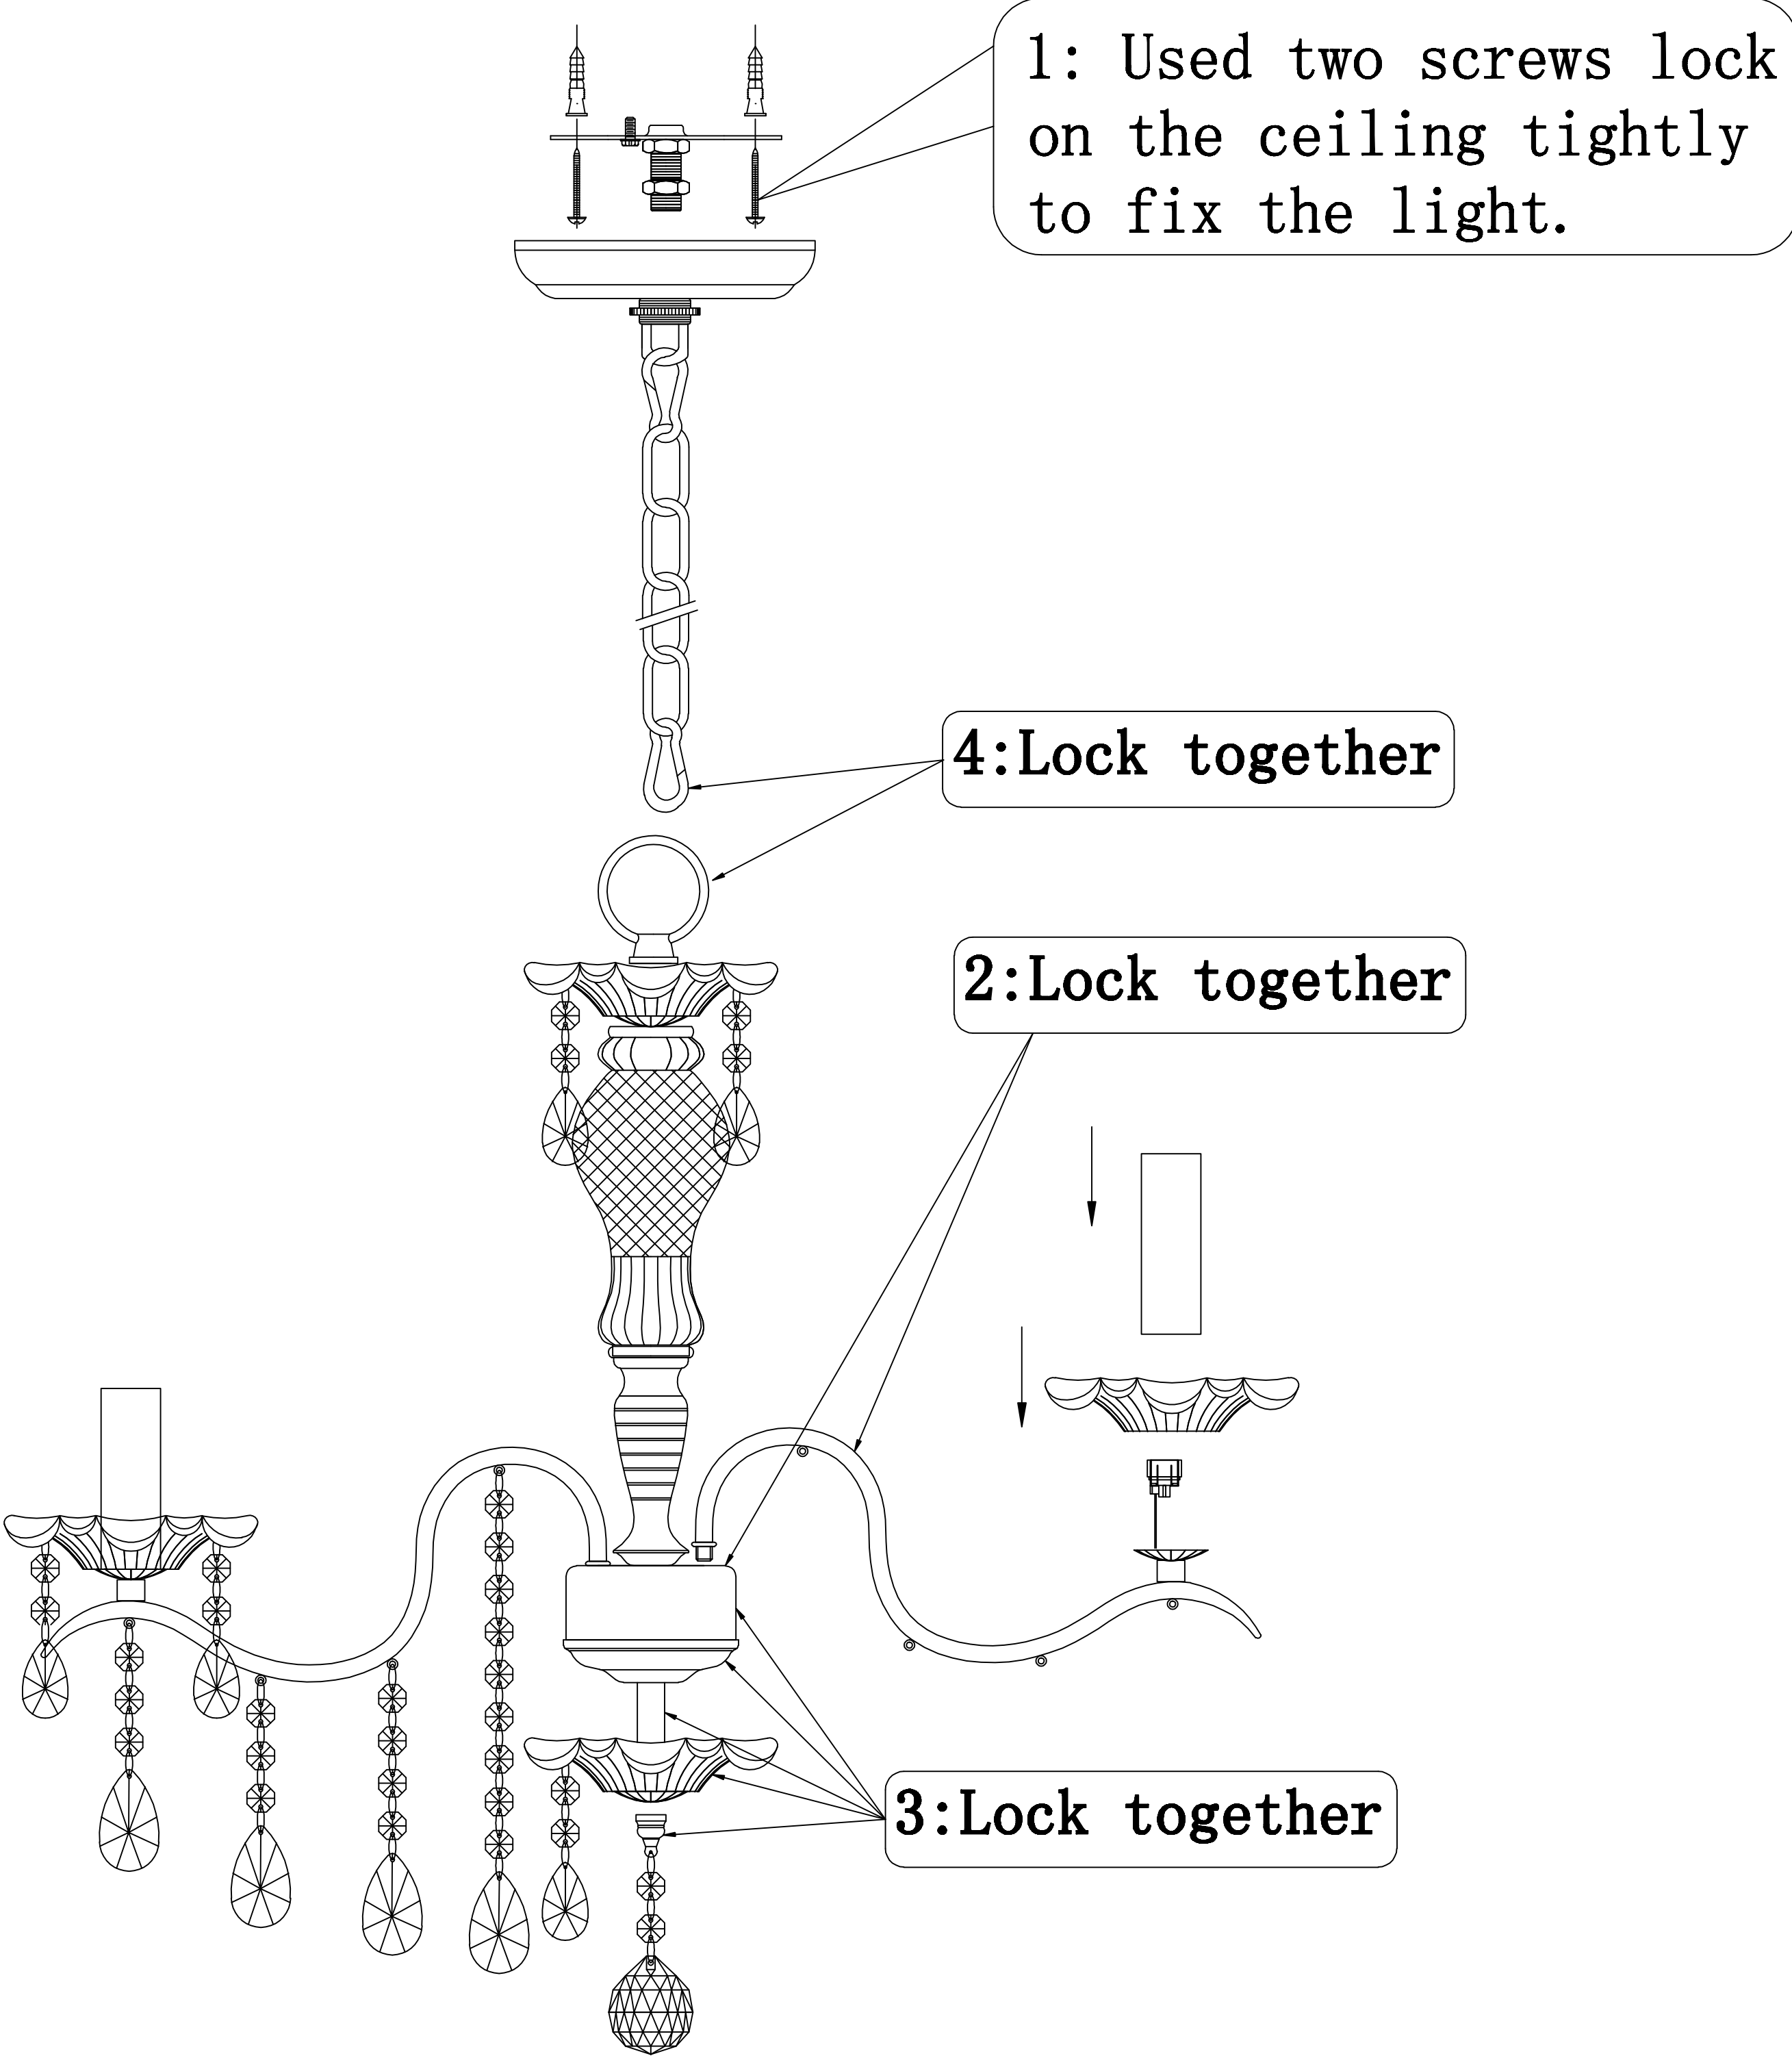

Product Size

