



Quick Start Guide

Pan-Tilt Battery Camera


Wi-Fi

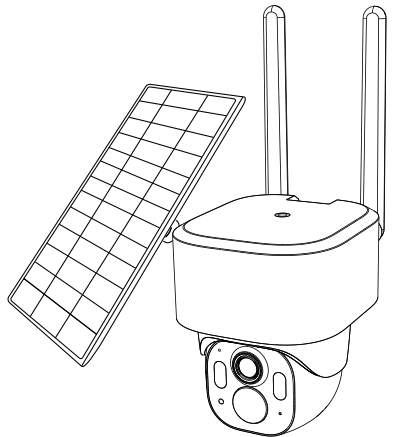

Packing List

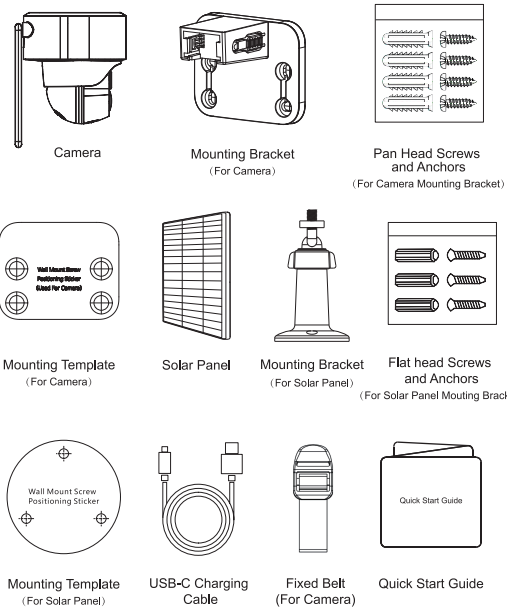

Product Description

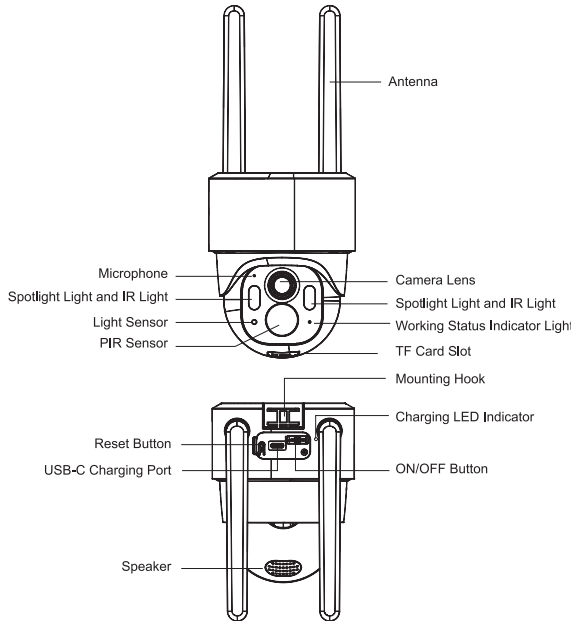


Product Description

Status Indicator		
Red	Flash	Ready to set up
	Solid	Abnormal boot
Green	Flash	Wi-Fi connecting
	Solid	Wi-Fi connection successful
Yellow	Flash	Upgrading firmware

Button		
ON/OFF Button	Power on	Switch the ON/OFF button to the ON side
	Power off	Switch the ON/OFF button to the OFF side
Restart Button	Reset	Press and hold the button for 5 seconds
	Wake up	Short press the button(in sleep or in the state of low battery shutdown)


Charging

It is recommended to fully charge before use.

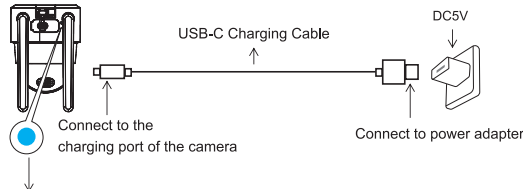

Charging status LED indicator		
Blue	Charging	Solid
	Full charged	Off
	Abnormal charging	Flash

Note: Please close the cover after charging.



Get the Gsmart Cam App or Smart Life App

1. Download the Gsmart Cam App or Smart Life App from App Store or Google Play. Or scan the QR code as below with your smartphone.



[Gsmart Cam]



[Smart Life]





2. Register an account on your Gsmart Cam App or Smart Life App

Step 1.

Enter your smart phone number or email address.

Step 2.

Enter the verification code and create a password.



Add Camera

Note:

- Make sure your smartphone is connected to a 2.4GHz Wi-Fi network.
- Please keep the camera close to the Wi-Fi router during the adding process.


1. Get ready to set up

① Power on or reset the camera to get it into the ready-to-setup state.

② When the camera enters the ready-to-setup state, the indicator light will flash red and a prompt will play.



Note: If the indicator light does not flash red, please press and hold the power button for 5 seconds to reset the camera.



2. Add camera to App

Method 1: Quick connection

Note: Make sure you have turned on your smartphone's bluetooth and grant the corresponding permissions to the Gsmart Cam App or Smart Life App.

① Enter the App, the camera to be added will pop up automatically, and then click the 'Add' button (Figure 1).

Note: If it does not pop up, please click the '+' icon or 'Add Device' button on the home page (Figure 2), the camera will appear at the top of the page, then click the 'Add' button next to the camera (Figure 3).




Figure 1




Figure 2



Figure 3

② Enter Wi-Fi password and click 'Next' (Figure 4).

Note: The camera only support 2.4GHz Wi-Fi.

③ Wait for the camera to automatically complete the network connection and click 'Done' (Figure 5 or Figure 6).




Figure 4



Figure 5




Figure 6

Add camera

Method 2: Add camera via QR code

① Power on or reset the camera to get it into the ready-to-setup state, then click 'Next' button .

② Click the '+' icon or 'Add Device' button on the home page (Figure 1).

③ Select 'Smart Camera (Wi-Fi)' (Figure 2).

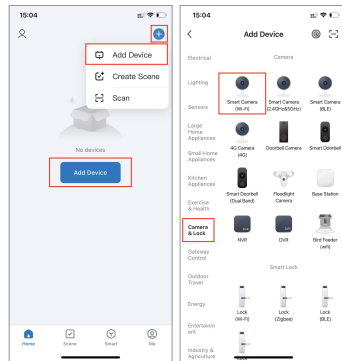


Figure 1

④ Enter Wi-Fi password and click 'Next' (Figure 3).

Note: The camera only support 2.4GHz Wi-Fi.

⑤ Scan the QR code with camera, then click 'I Heard a Prompt' button (Figure 4).

⑥ Wait for the adding process to complete automatically and then click 'Done' button (Figure 5).

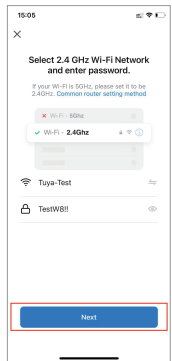


Figure 3

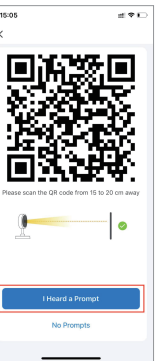


Figure 4


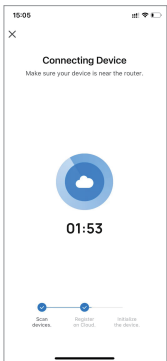



Figure 5

Installing Camera


- ① Select the installation location. The recommended installation location height is 2-3m.
- ② Install the camera bracket. According to the installation template, drill holes with a 15/64"(6 mm) drill bit, then insert the anchor into the holes and screw the mounting bracket to the wall. For soft surface such as wood, you don't need to pre-drill holes and you can just directly use the screws to fix the bracket.



③ Install the camera on the mounting bracket .



Note: Please be careful, do not use the following incorrect installation method to install the camera.

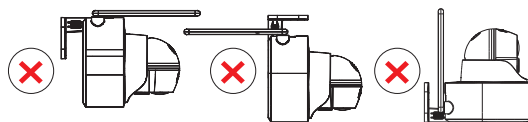

Installing Solar Panel

Note:

The bracket used for the solar panel and the camera are different.

Tips:

- ① Find the area that gets the most direct sunlight throughout the day. Angle the solar panel upward 30°. Point it south if in the northern hemisphere and north if in the southern hemisphere.
- ② Periodically wipe the surface of the solar panel with a soft, damp cloth to remove dust or debris.

Installation

- ① Choose a suitable installation location, fix the mounting bracket, and install the solar panel on the bracket (Figure 1).
- ② Adjust the angle of the solar panel to get enough sunlight, then tighten the adjustment knob to lock the solar panel (Figure 2).
- ③ Open the silicone cover of the charging port at the back of the camera (Figure 3), and then insert the Type-C charging head of the solar panel to complete the connection (Figure 4).




Figure 1




Figure 2




Figure 3




Figure 4

Note:

The solar panels operate at ambient temperatures from 0°C(32°F) to 45°C(113°F) and will not charge the camera at temperatures below 0°C(32°F) and above 45°C(113°F). In this case, please place the camera indoors and charge it with a 5V power adapter.

Technical Sepcifications

Operating temperature -20°C ~50°C , Operating humidity 10%~95% No condensation.
Frequency Range: 2.412~2.472GHz (EU), RF Output Power: 17.5dBm
Frequency Range: 2.412~2.462GHz (US/CA), RF Output Power: 17.5dBm
Power: General 5V Direct Current 1.5A Max, symbol \equiv means direct current.

warning

Federal Communications Commission (FCC) Declaration of Conformity

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
This device complies with Part 15 of the FCC Rules.Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.
Radiation Exposure Statement
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.



- Never used the appliance and its battery in extreme conditions (high or low extreme temperatures, high altitude...) during use, storage or transportation.
- Warning: Batteries shall not be exposed to excessive heat such as sunshine, fire or the like.
- Never damage the appliance and its battery.
- Never short circuit the battery.

Declaration Of Conformity European Notice



Hereby, Zhejiang Lingzhu Technology Co., Ltd. declares that this product is in compliance with essential requirements and other relevant provisions of Directive 2014/53/EU,2011/65/EU.



This product must not be disposed of as normal household waste, in accordance with EU directive for waste electrical and electronic equipment (WEEE- 2012/19/EU). Instead, it should be disposed of by returning it to the point of sale, or to a municipal recycling collection point.
The device could be used with a separation distance of 20cm to the human body.

English Warning Statement:

"This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device."

French Warning Statement:

"Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

Radiation Exposure Statement:

This equipment complies with Canada RF exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet appareil est conforme aux limites d'exposition aux rayonnements de l'IC établies pour un incontrôlé environnement. L'appareil doit être installé et utilisé avec une distance minimale de 20cm entre le radiateur et votre corps.