


Tiwn XL LOFT BED ASSEMBLY INSTRUCTIONS

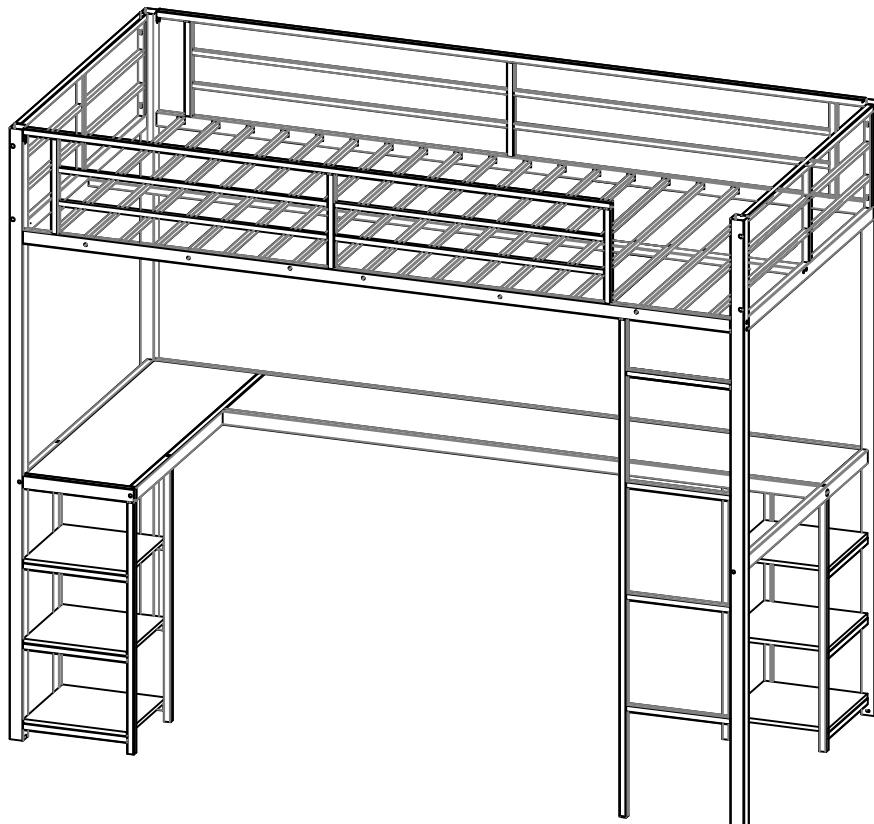

SAFETY WARNINGS AND GENERAL NOTES:


1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the warning label from the bed.
2. Always use the recommended size mattress on mattress support, or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.
11. Always use guardrails on both long sides of the upper bunk.
12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.

The use of water or sleep flotation mattresses is prohibited.

13. **STRANGULATION HAZARD**-Never attach or hang items to any part of the bunk bed that are not designed for use with the bed; for example, but not limited to, hooks, belts and jump ropes.
14. Keep these instructions for future reference.
15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.
16. Be certain all staples are out of the box before beginning assembly on the shipping carton.
17. **USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.**
Up bed (bunk bed and tribed included)

Mattress size	Length	Width	Thickness
Twin XL Stand	79"-80"	38"-39"	6"max
18. **SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.**
19. Replacement Parts:
Replacement Parts, including additional guardrails, may be obtained from any of our (Sheng Zhen Yue feng zhi qi Co., Ltd) dealers.

Exploded view

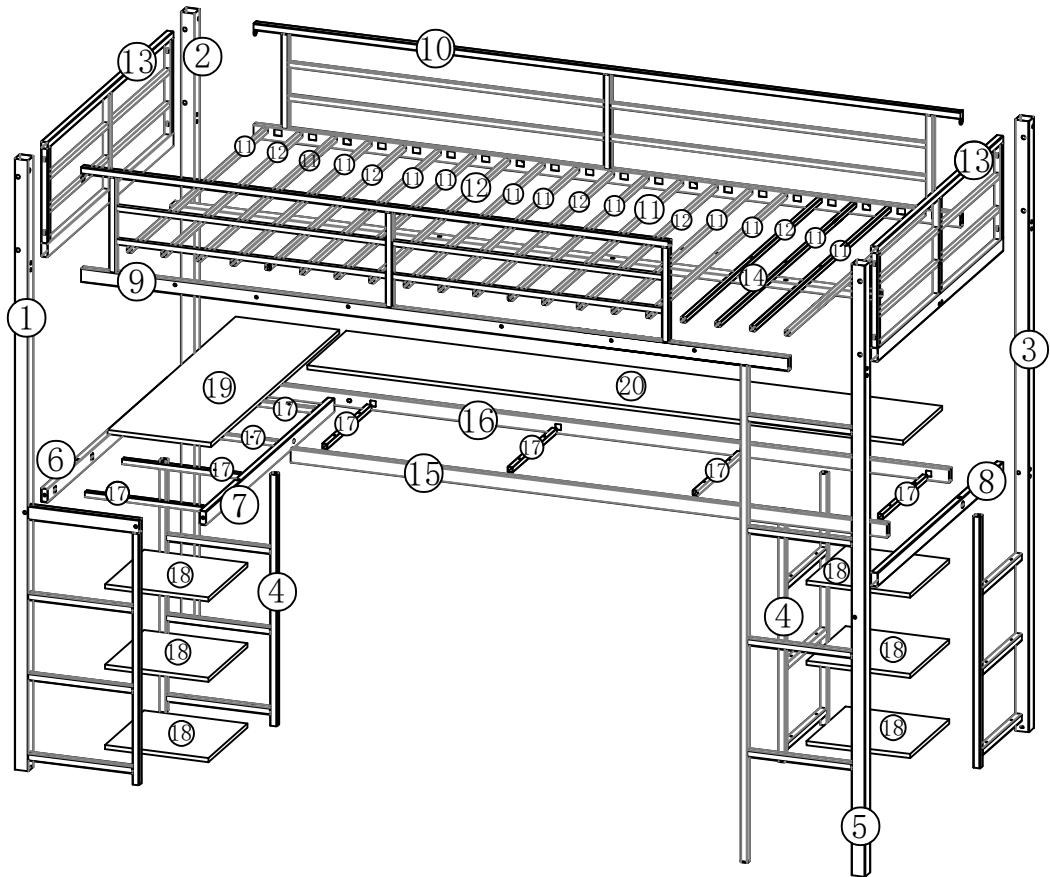


PART LIST

1-1PC	2-1PC	3-1PC
4-2PCS	5-1PC	6-1PC
7-1PC	8-1PC	9-1PC
10-1PC	11-14PCS	12-6PCS
13-2PCS	14-1PC	15-1PC
16-1PC	17-8PCS	18-6PC
19-1PC	20-1PC	


HARDWARE LIST

<td><td><td><td><td><td><td><td><td></td></td></td></td></td></td></td></td></td>	<td><td><td><td><td><td><td><td></td></td></td></td></td></td></td></td>	<td><td><td><td><td><td><td></td></td></td></td></td></td></td>	<td><td><td><td><td><td></td></td></td></td></td></td>	<td><td><td><td><td></td></td></td></td></td>	<td><td><td><td></td></td></td></td>	<td><td><td></td></td></td>	<td><td></td></td>	<td></td>	
A 4*10 44PCS	C 8*35 11PCS	D 8*55 30PCS	F 8*15-11PCS E 6*30-18PCS	K 40PCS	L	M	N (Installed)	P (Installed)	O (Installed)

Step 1: Use hardware N and D to connect #2、3、10 and #16 together.

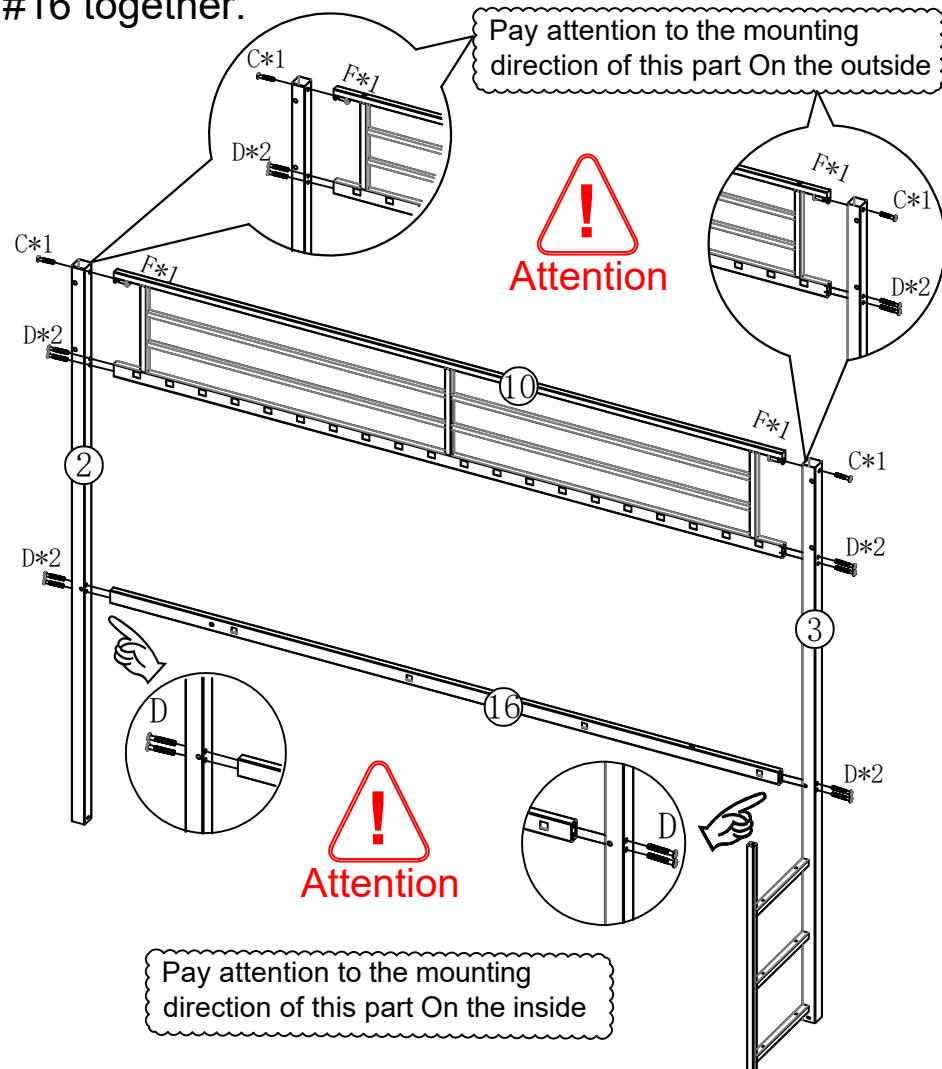


Step 2: Use hardware N, C,D, E to connect #1,#17 #6,#7 and #13 to the previously installed components.

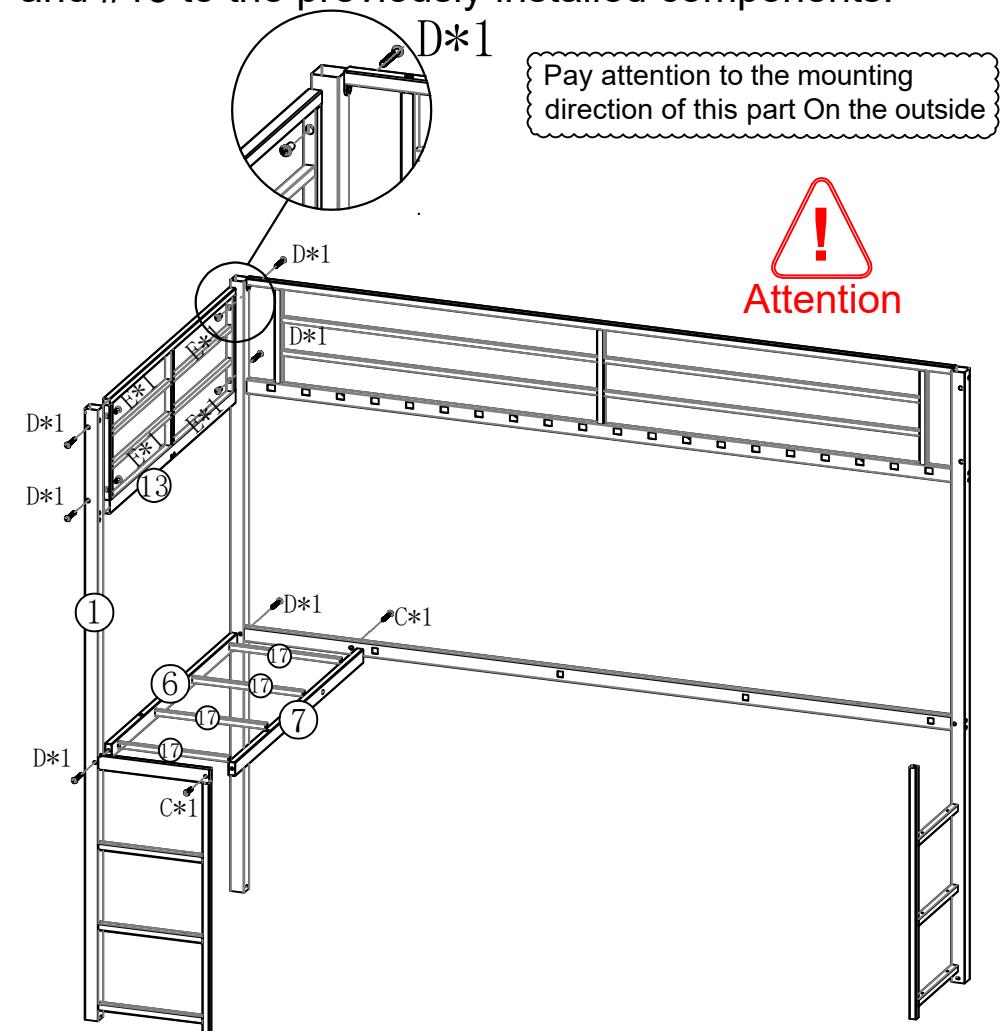



2-1pcs		C 8*35-2PCS		1-1pcs	6-1pcs	17-4pcs	C 8*35-2PCS
		F 8*15-2PCS		7-1pcs		D 8*55-6PCS	N

Step 2: Use hardware N , E and D to connect #5, #8 and #13 to the previously installed components.

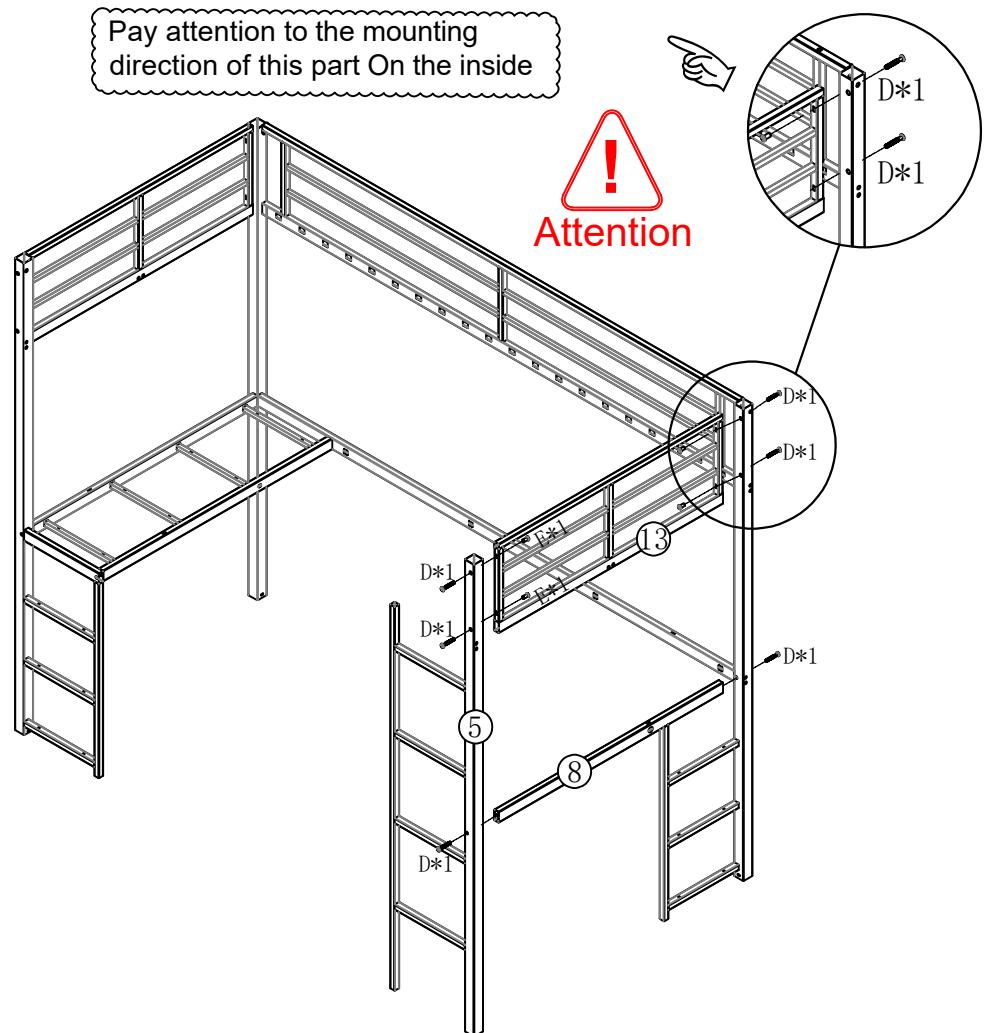


Step 4: Use hardware N,C to connect #15and #17 to the previously installed components.


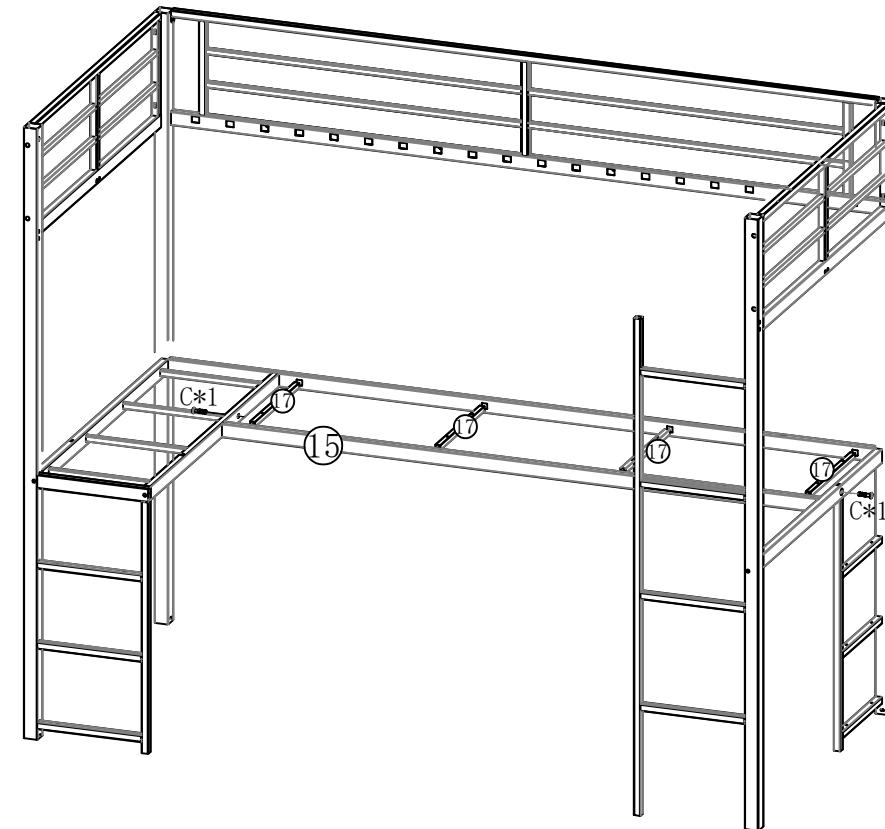


				D 8*55-6PCS				
5-1pcs	8-1pcs	13-1pcs		F 8*15-4PCS				

Step 5: Use hardware N,D to connect #4 to the previously installed components.

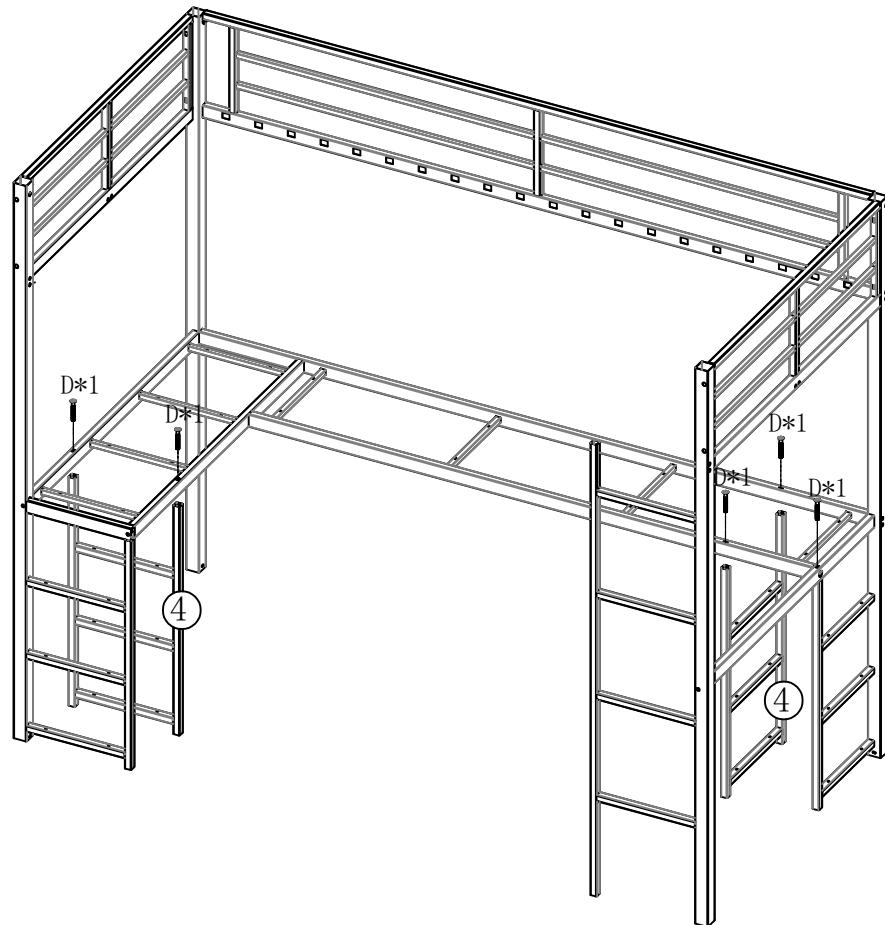

Step 6: Use hardware A,G to connect #18, #19 and #20 to the previously installed components.

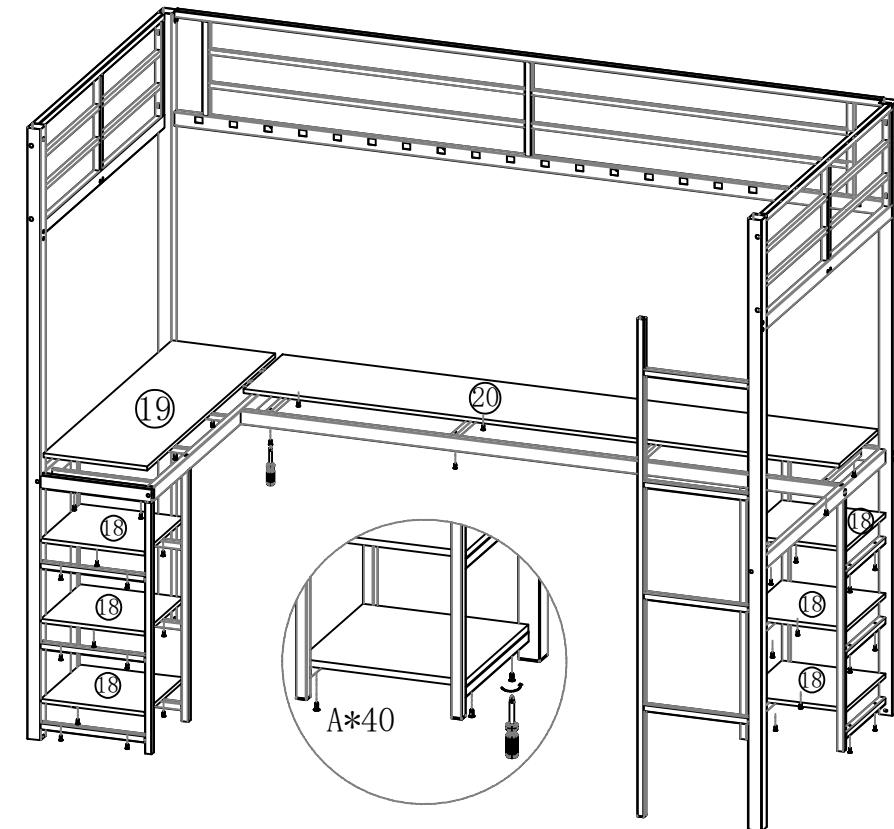


4-2pcs




D 8*55-5PCS


N



18-6pcs



19-1pcs



20-1pcs




A 4*10-40PCS




G


Step 7: Use hardware N,C to connect #14 to the previously installed components.

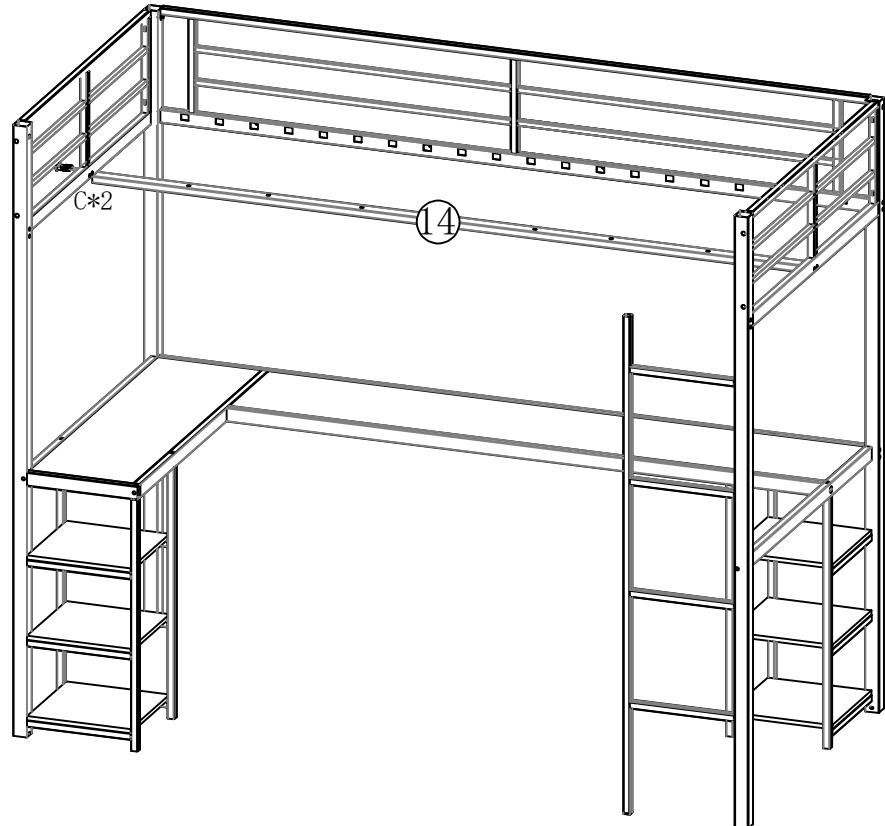

Step 7: Use hardware N,C,F to connect #11and #12 to the previously installed components.

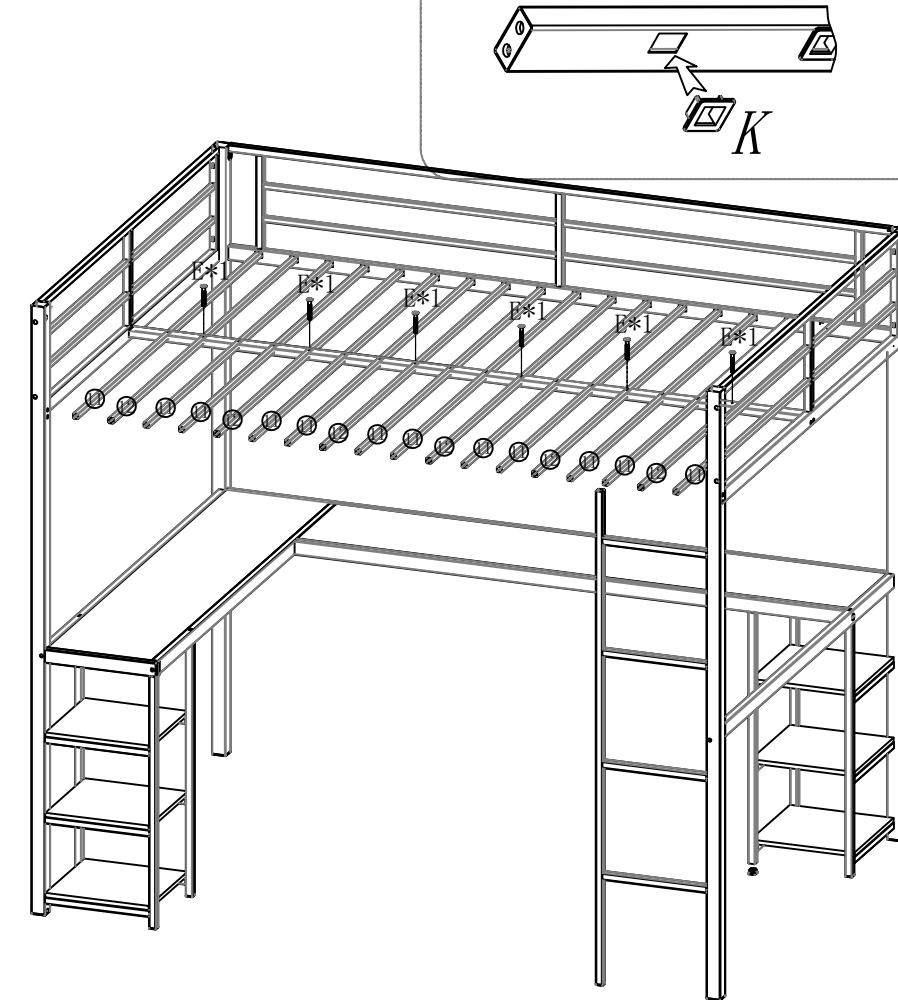


14-1pcs



C 8*35-4PCS



N

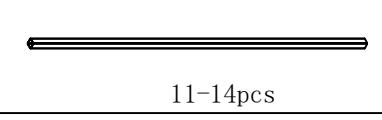

11-14pcs




12-6pcs



E 6*30-6PCS




K-40PCS




N


Step 8: Use hardware N and E to connect together.

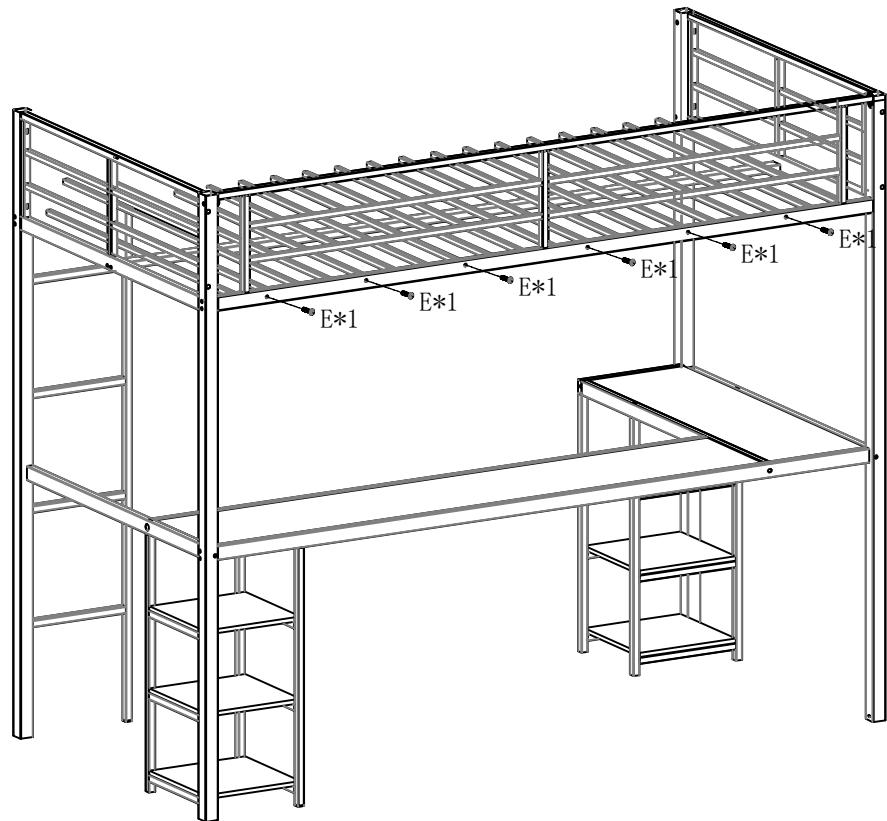

Step 9: Use hardware N,C,D to connect #9 to the previously installed components.

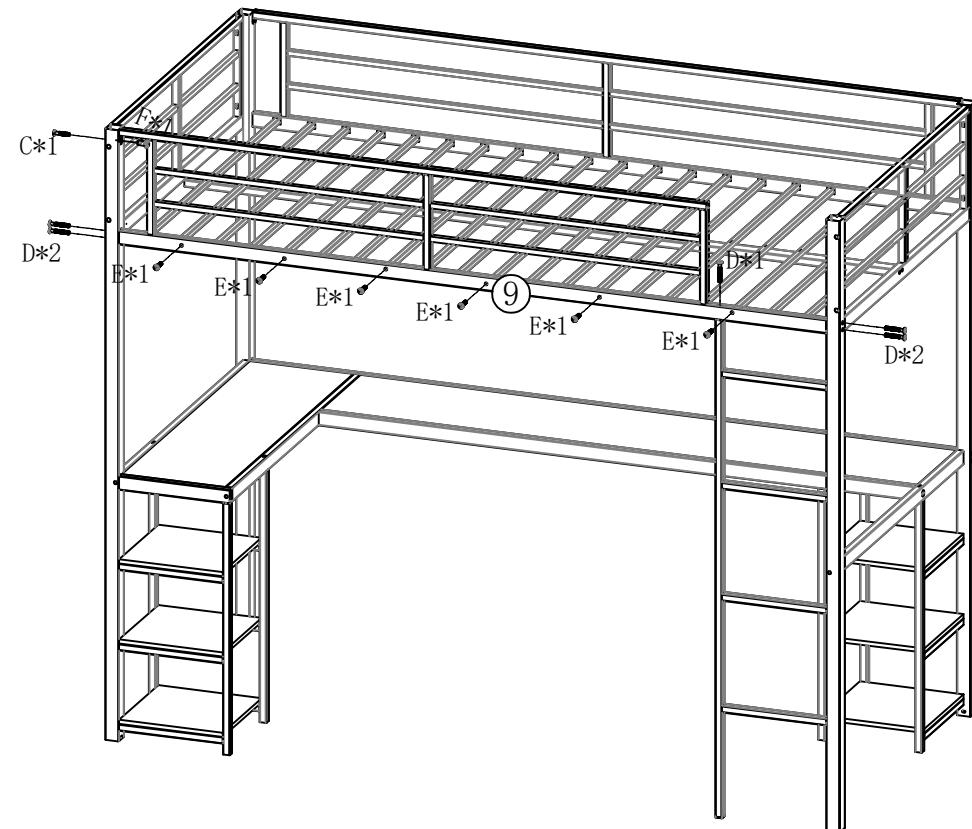

E 6*30-6PCS



N



9-1pcs



C 8*35-1PCS



F 8*15-1PCS



E 6*30-6PCS



D 8*55-5PCS



N

Completed loft bed

