# **Assembly Instructions**

Caution: You must read this before you proceed

## Loveseat



Uart	LICT
ган	1.51
. <b>G</b> . C	


Label	Picture	Description	QTY
Α		Left Chair Part	1

В		Right Chair Part	1
С		Back Seat Left Bar	1
D	A A	Back Seat Right Bar	1
E		Front Seat Left Bar	1
F		Front Seat Right Bar	1
G		Middle Support Bar	1
Н		Left Leg	1
I		Right Leg	1

<u>Hardware</u>				
Label	Picture	Description	QTY	
1		Bolt (M6*30mm)	7	
2		Bolt (M6*35mm)	5	
3		Bolt (M8*25mm)	5	
4		Washer (M6)	12	
5		Washer (M8)	5	
6		Nut	12	
7		Allen Key (M6)	1	
8		Allen Key (M8)	1	
9		Wrench	1	

# **Assembly Preparation**

Before Beginning Assembly:

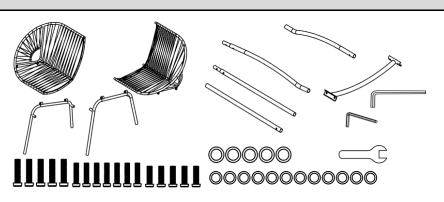



• Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-




Save all packaging until finished-

# **Assembly Steps**

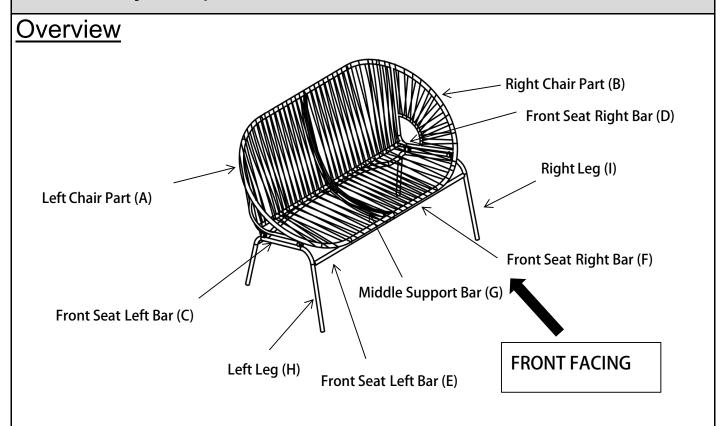


This Loveseat has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Loveseat parts, the above picture is to help you put the various parts into perspective. Please read through the instructions here below to familiarise yourself with the parts and steps before assembly.

### Step 1

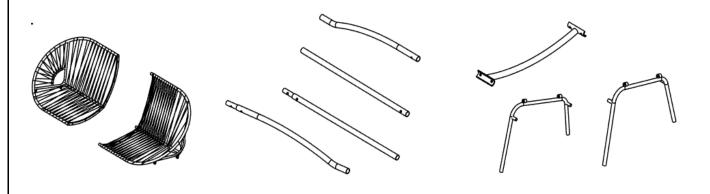


Unpack and place all parts on a clean, non-marring surface.

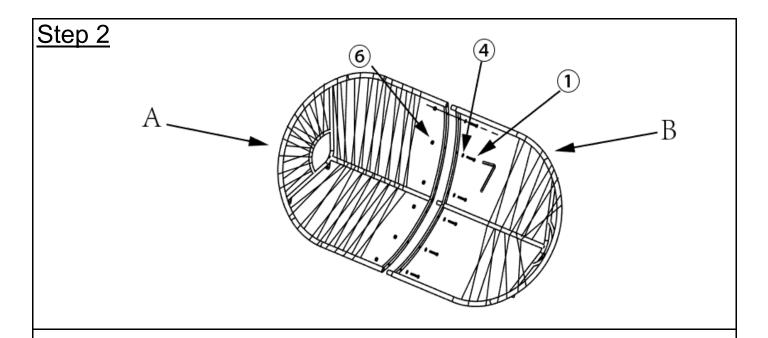

Align the tenon of the Right Chair Part(B) into the Mortise of Left Chair Part(A) as shown above.

Then, affix the Right Chair Part(B) to the Left Chair Part(A) using Bolts( $\bigcirc$ ), Washers( $\bigcirc$ ), and Nuts ( $\bigcirc$ ) with the Allen Key( $\bigcirc$ ).

Do not fully tighten the Bolts.

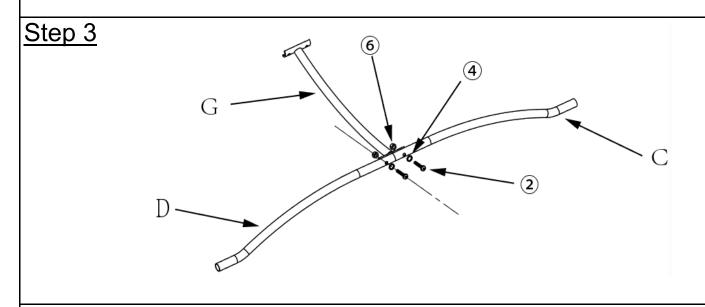


Align the tenon of the Back Right Seat Bar(D) into the Mortise of the Back Left Seat Bar(C), and attach the Middle Support Bar (G) to the Mounting Position as shown above.

Then, affix the Back Right Seat Bar(D), the Back Left Seat Bar(C) and the Middle Support Bar (G) together using Bolts (②), Washers(④), and Nuts (⑥) with the Allen Key(⑦).

Do not fully tighten the Bolts.

### Step 4

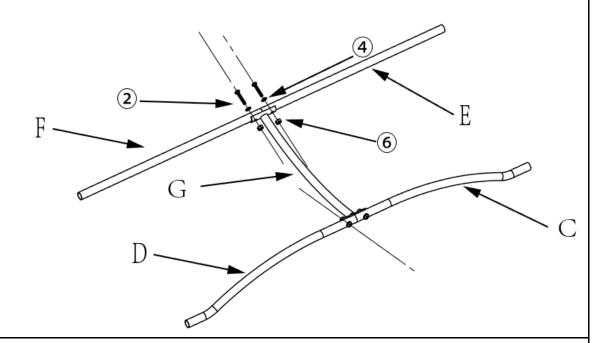


Align the tenon of the Front Right Seat Bar(F) into the Mortise of the Front Left Seat Bar(E), and attach the Middle Support Bar (G) based on Step 3 to the Mounting Position as shown above.

Then, affix the Front Right Seat Bar(F), the Front Left Seat Bar(E) and the Middle Support Bar (G) together using Bolts (②), Washers(④), and Nuts (⑥) with the Allen Key(⑦).

Do not fully tighten the Bolts.

### Step 5

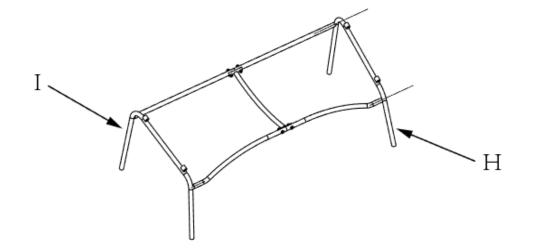

Align the Left Leg(H), the Right Leg(I) separately to Step 4.

# <u>Step 6</u> 8

Align Step 2 to Step 5 and affix by using Bolts(③) and Washers(⑤) with the Allen Key(⑧) as shown above.

Note: The higher side of Step 5 is the front side.

Place the Loveseat on a **LEVEL SURFACE**.

Inspect it and make sure all parts are adequately connected.

Gently and carefully sit onto the Loveseat.

This will help to align all parts at all joints.

Then get off the Loveseat, and in a sequential manner, proceed to tighten all Bolts.

When tightening the Bolts, tighten sequentially.

**DO NOT** tighten any Bolt fully and then move on to the next one.

This may cause the frame to warp.

If there are any wobbles after tightening, loosen the Bolts and execute this same process.

Note: This step is done best with the assistance of a second adult.

### Step 7



You Loveseat is ready for use.

This Loveseat can only be used on a flat, level surface.

### Care & Maintenance

- Prolonged exposure to rain may cause rusting which can stain floors.
- Do not put hot items directly on furniture surface.
- Do not clean furniture with harsh cleansers or polish.
- To obtain the longest lifespan of your outdoor products, minimizing exposure to direct sunlight is recommended.
- Children should not climb or jump on the furniture.
- Do not write on furniture without a padded barrier to protect the surface.
- To obtain the longest lifespan of your outdoor products, avoid extended and lengthy exposure to rain, snow, and direct sunshine. Whenever possible cover the product and /or place under patio or awnings.
- Stains may be removed with mild soap solution and damp cloth.
- ✓ ② Keep away from sources of ignition.
  - Dust and pick-up spills using a clean, non-colored, lint-free cloth.