




Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.







Pre-assembly:


- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

Parts List

Item	Description	QTY
P1	Chair Back 	1
P2	Seat Cushion 	1
P3	Front Legs 	2

Hardware List

Item	Description	QTY
H1	Long Bolts $\phi 5/16"$ x 3-1/2"L 	4
H2	Medium Bolts $\phi 5/16"$ x 3"L 	4
H3	Short Bolts $\phi 5/16"$ x 1-3/4"L 	1
H4	Lock Washers 5/16" 	9
H5	Flat Washers 5/16" 	9
H6	Allen Wrench 5/16" 	1

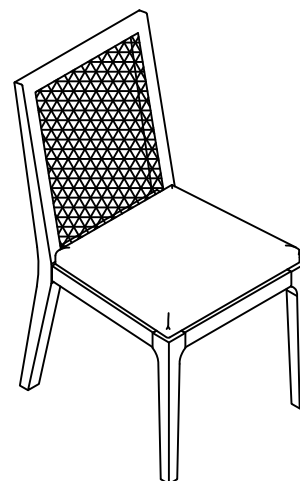

DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.

Assembly Procedures:


Step 1: Assemble the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Loosely attach the seat cushion (P2) to the chair back (P1) as shown below.

(H3)x1 Short Bolts $\phi 5/16"$ x 1-3/4"L 

(H4)x1 Lock Washers 5/16" 

(H5)x1 Flat Washers 5/16" 

(H6)x1 Allen Wrench 5/16" 

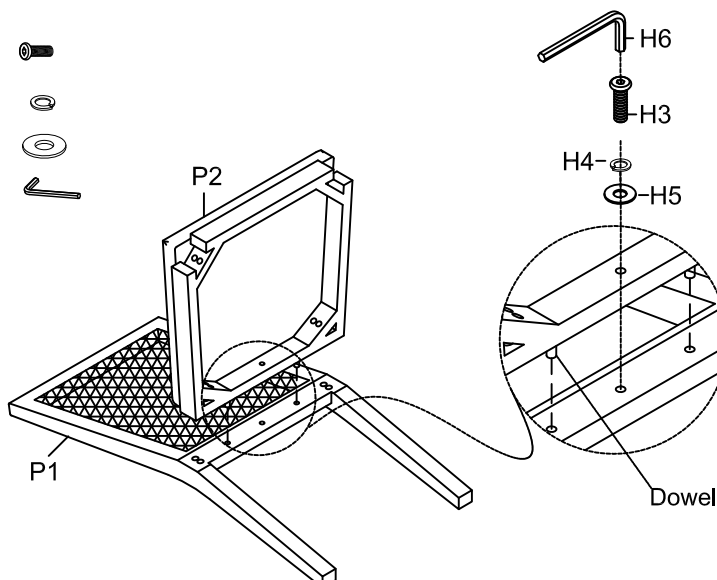


Step 2. Loosely attach the seat cushion (P2) to the legs of chair back (P1) as shown below.

(H1)x4 Long Bolts $\phi 5/16"$ x 3-1/2"L

(H4)x4 Lock Washers 5/16"

(H5)x4 Flat Washers 5/16"

(H6)x1 Allen Wrench 5/16"

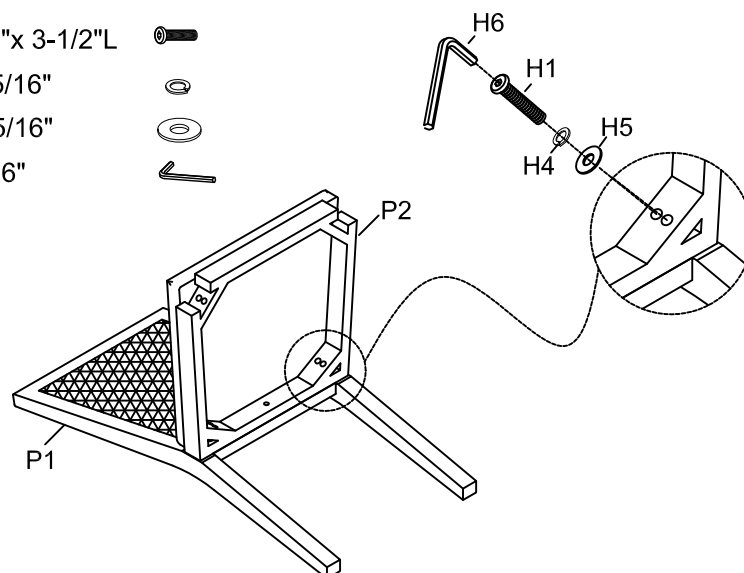


Step 3. Attach the front legs (P3) to the bottom of seat cushion (P2) as shown below.

(H2)x4 Medium Bolts $\phi 5/16"$ x 3"L


(H4)x4 Lock Washers 5/16"

(H5)x4 Flat Washers 5/16"

(H6)x1 Allen Wrench 5/16"

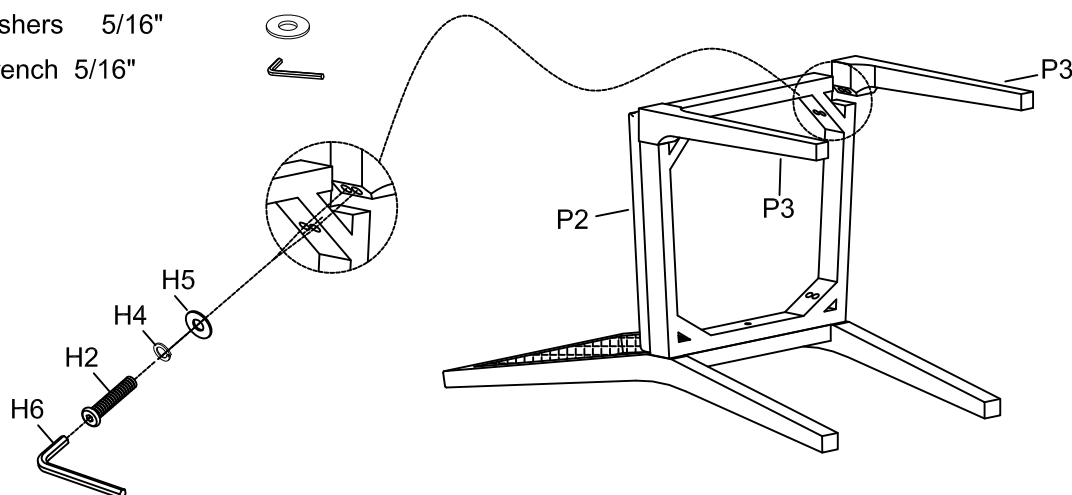

Step 4. Securely tighten all bolts with Allen wrench(H6), turn the assembled chair to an upright position, make sure the chair is level, aligned properly. Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

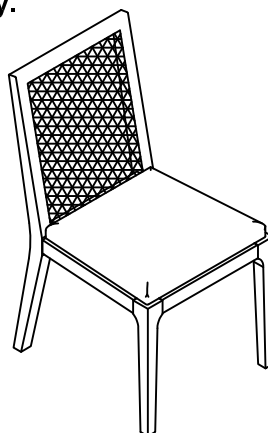

ADDITIONAL NOTE ABOUT SAFETY:

BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.

THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY, AND ENSURE STABILITY.

Thank you for your purchase