

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.















To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this luminaire cannot be replaced
- If the cord is damaged, the luminaire shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Bend tube A		2X	H	Wire harness		1X
B	Bend tube B		3X	I	Self-tapping screw		2X
C	Tube		5X	J	Explosion screw		2X
D	Canopy		1X	K	Wire connector		5X
E	Bulb		5X	L	Wrench		1X
F	Mounting bracket		1X	M	Nut		5X
G	Screwed ball		2X	N	Spring washer		5X



Model# LIT4362A
Product Dimensions: 49" X 49"D X 43 "H

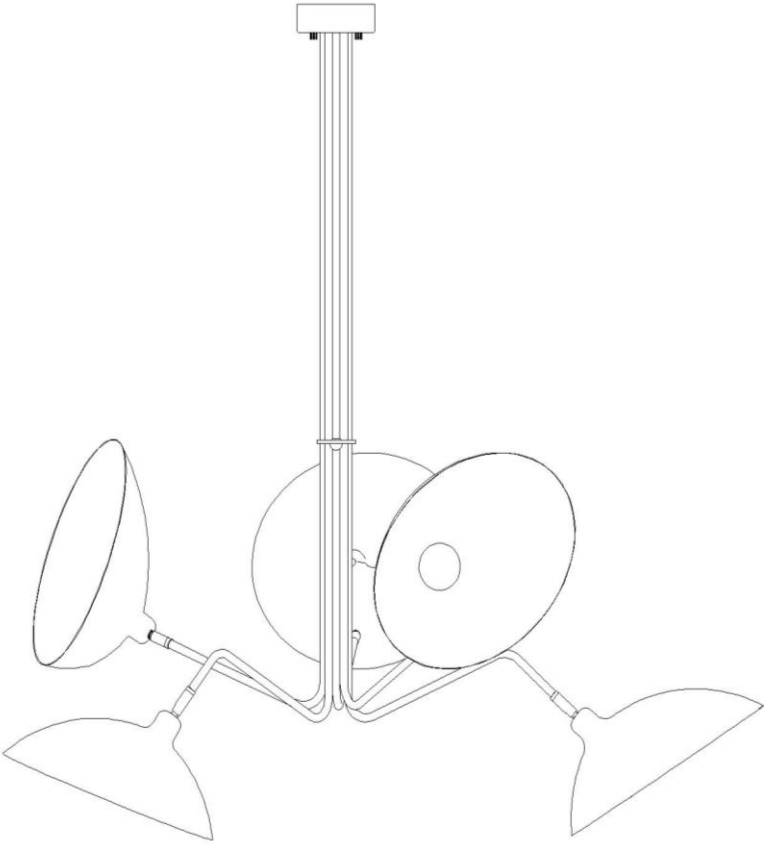


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.
Estimated Assembly Time: 20 minutes.

1. According the assembly sequence on the right,connect the tube(C) into two bent tube(A) and three bent tube(B).
After that,put spring washer(N) into five tube C and using the nut(M) fix the tube(C) on the canopy by wrench(L)
2. Make wire connections,useing wire harness(H) connect wire and the main power supply cord.
with wire connector (K), following the reference chart listed below.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

- Grounding Instructions:
- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

3. Embed explosion screw(J) into the wall.
4. Inserting self-tapping screw(I) into explosion screw to fix mounting bracket(F).
5. Orient the ceiling canopy (D) so that the mounting screws protruding from the mounting bracket go into the holes in the canopy, then secure it with the provided screwed balls (G).
6. Install bulbs (E). Be sure to use light bulb (E) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.

ENJOY YOUR LAMP

