


# Assembly Instructions










**Caution: You must read this before you proceed**

**Please look in the velcro pouch for hardware packs and legs**



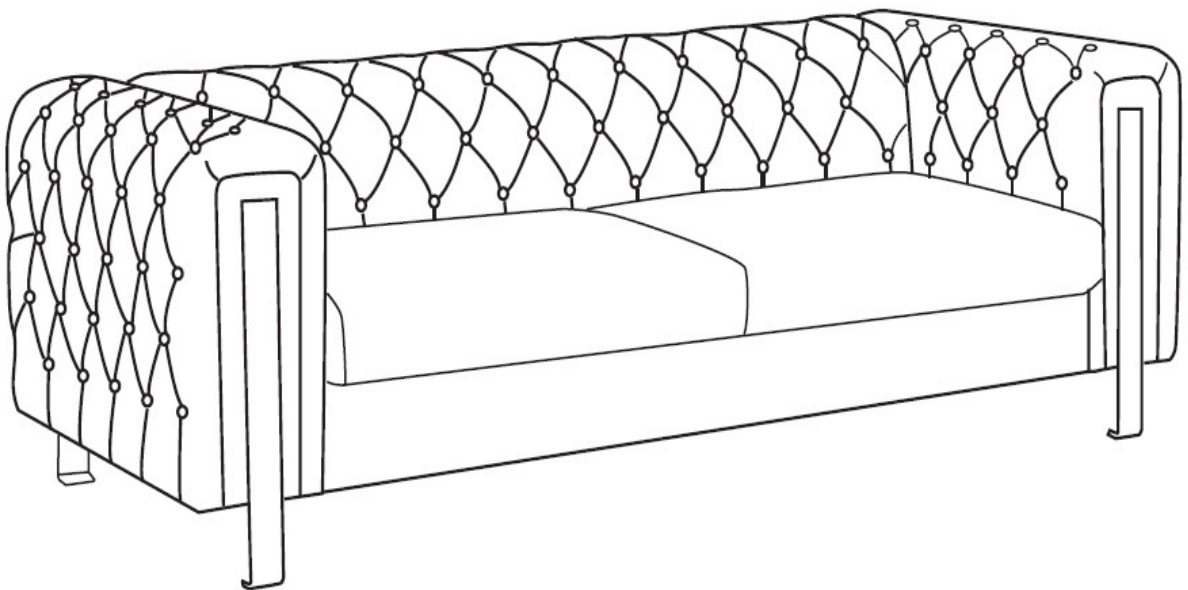





## SOFA



## Part List


Label	Picture	Description	QTY
A		Backrest	1
B		Left Armrest	1
C		Right Armrest	1
D		Seat	1
E		Front Rail	1
F		Seat Cushion	2
G		Seat Spring (Package)	2
H		Front Leg	2
I		Back Leg	2

## Hardware List

Label	Picture	Description	QTY
①		Bolt (M8*25MM)	11
②		Bolt (M8*40MM)	3
③		Flat Washer (M8)	11
④		Spring Washer (M8)	11
⑤		Allen Key (S5)	1
⑥		Bolt (M6*20MM)	5
⑦		Iron Sheet	2
⑧		Allen Key (S4)	1

## Assembly Preparation

Before Beginning Assembly:

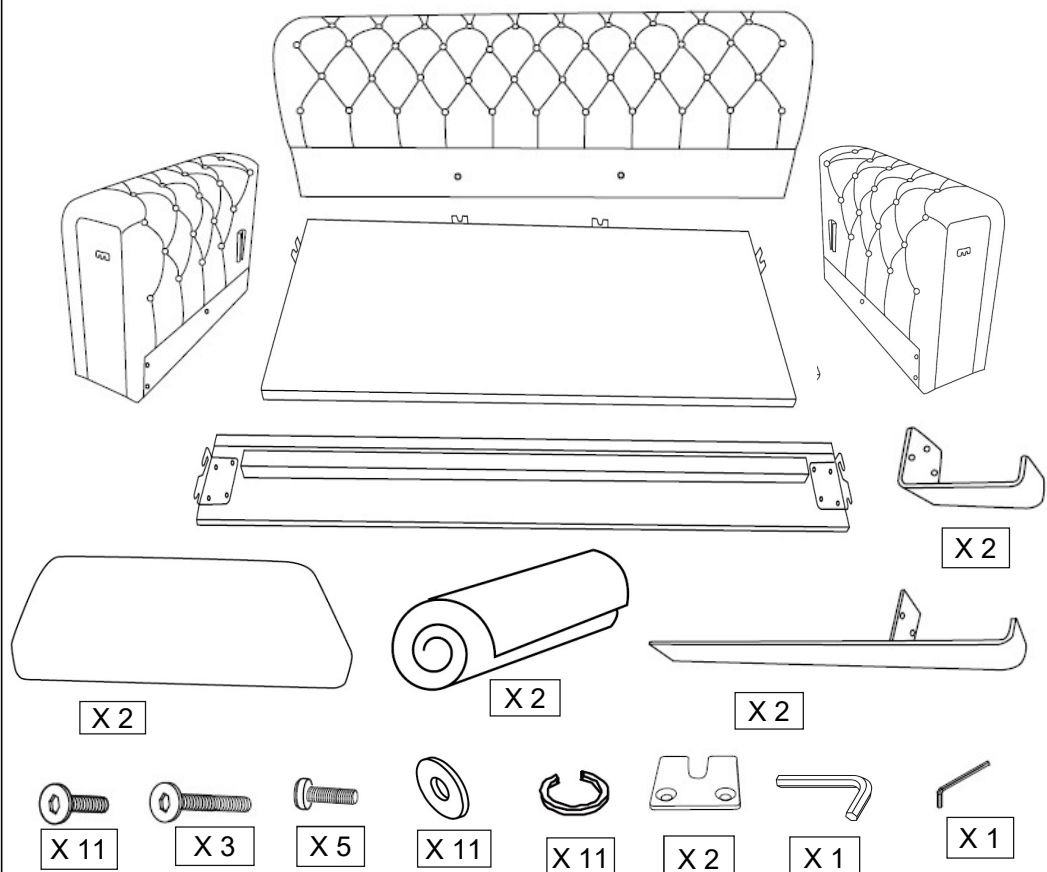

• Read instructions, cover to cover-



• Have 2 adults on hand for assembly-



• Do not assemble on flooring or carpet-




• Assemble on a clean non-marring surface (packing foam)-



• Save all packaging until finished-

## Assembly Steps


### OVERVIEW

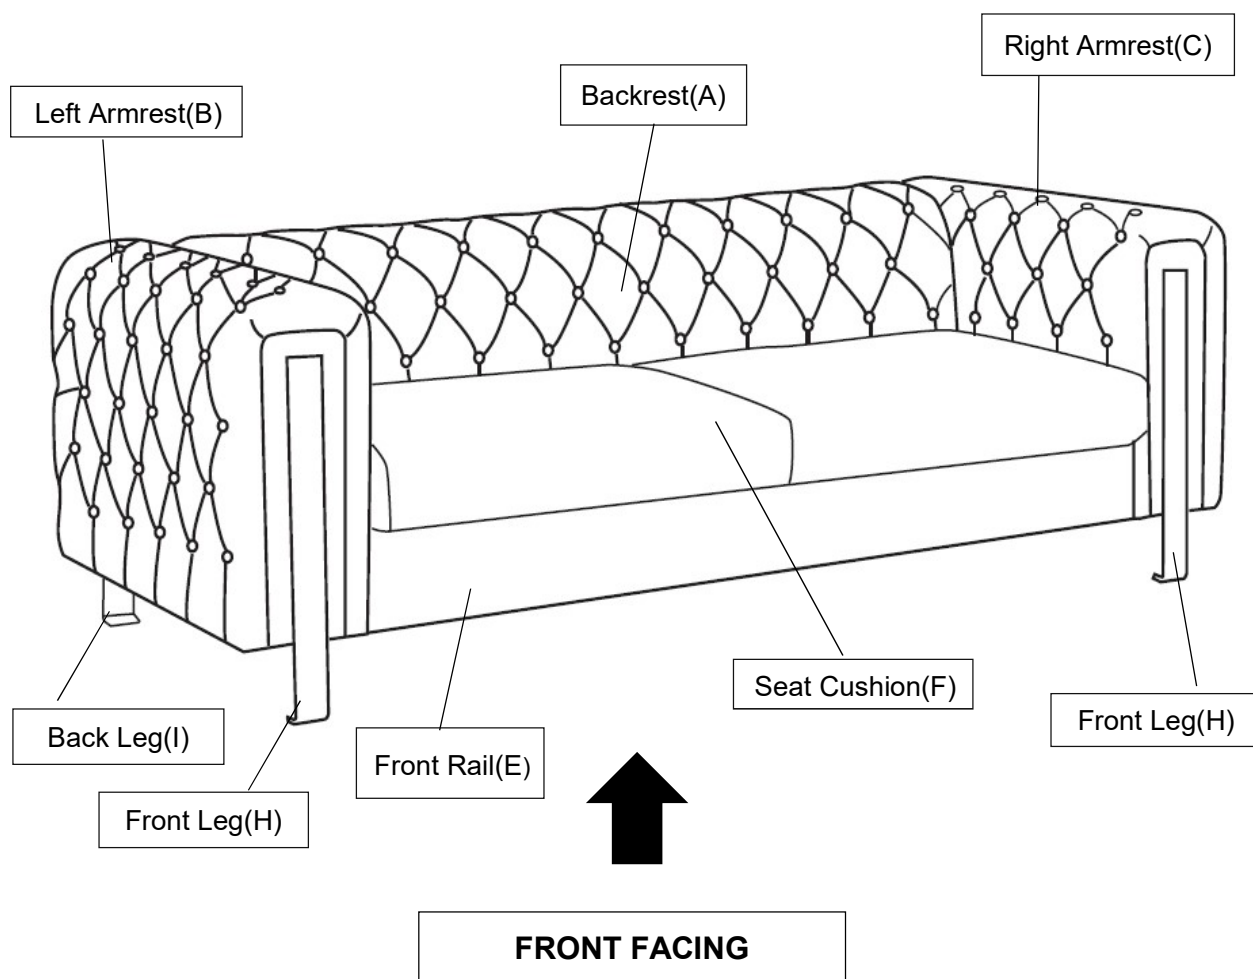

This Sofa has multiple parts and may require up to 60 minutes to assemble. To give you an overview of the Sofa parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.


**Note: It is recommended that you have an adult partner to assist during the entire assembly process.**

## Step 1

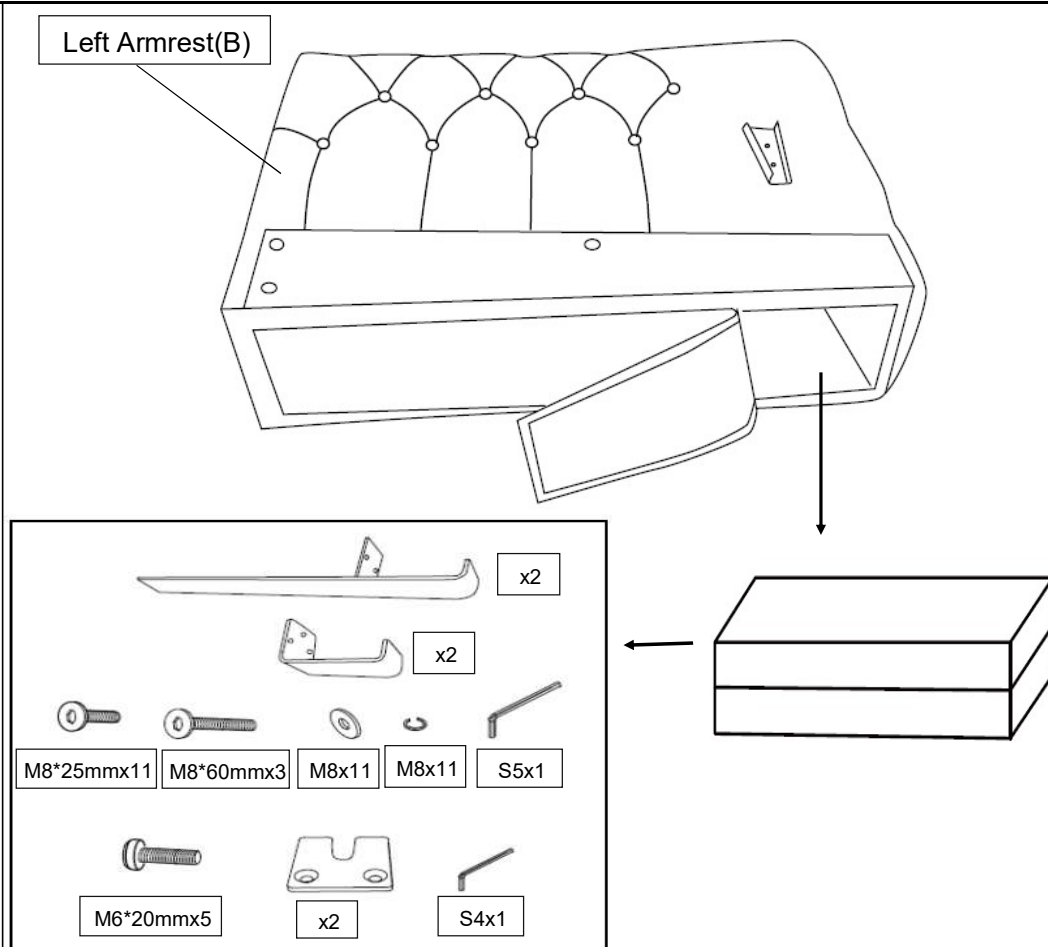


Open the carton and place all the parts on a clean, non-marring surface.  
Remove Hardware package and Leg(H)&(I) from the bottom of Left Armrest(B) as shown above.

## Step 2

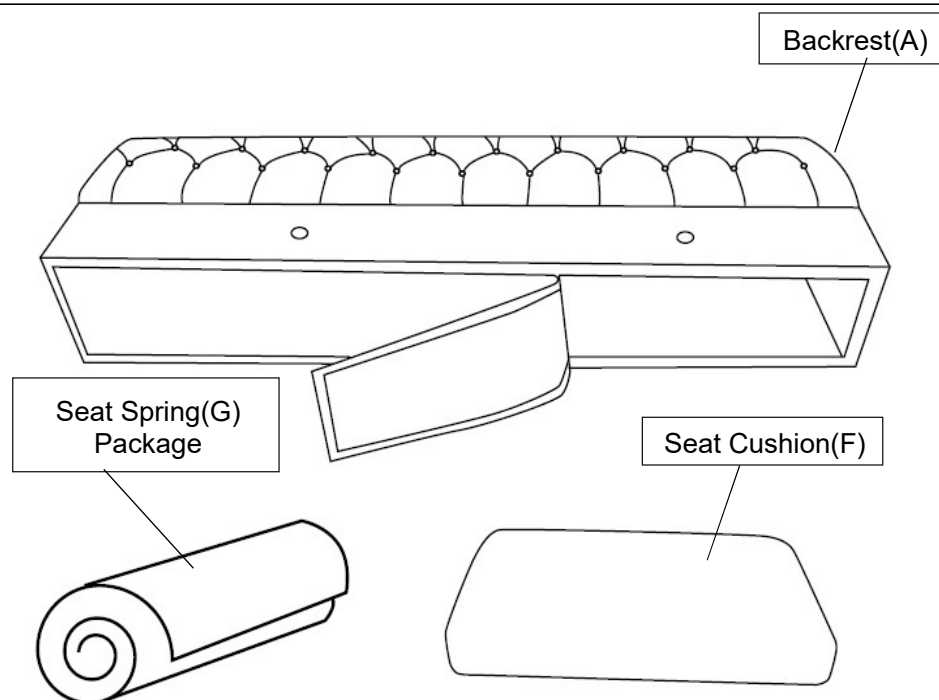


Open the bottom of Backrest(A),remove the Seat Spring(G) Package and Seat Cushion(F) from Backrest(A).

### Step 3

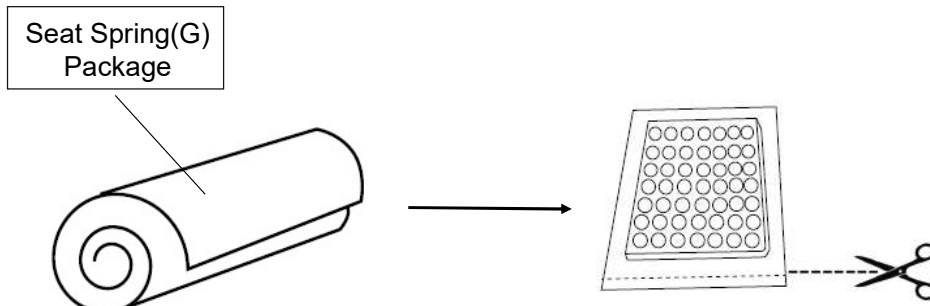


Open Seat Spring(G) Package flat.Then cut the Package along the side as shown above,and take out Seat Spring(G) from the package.

### Step 4

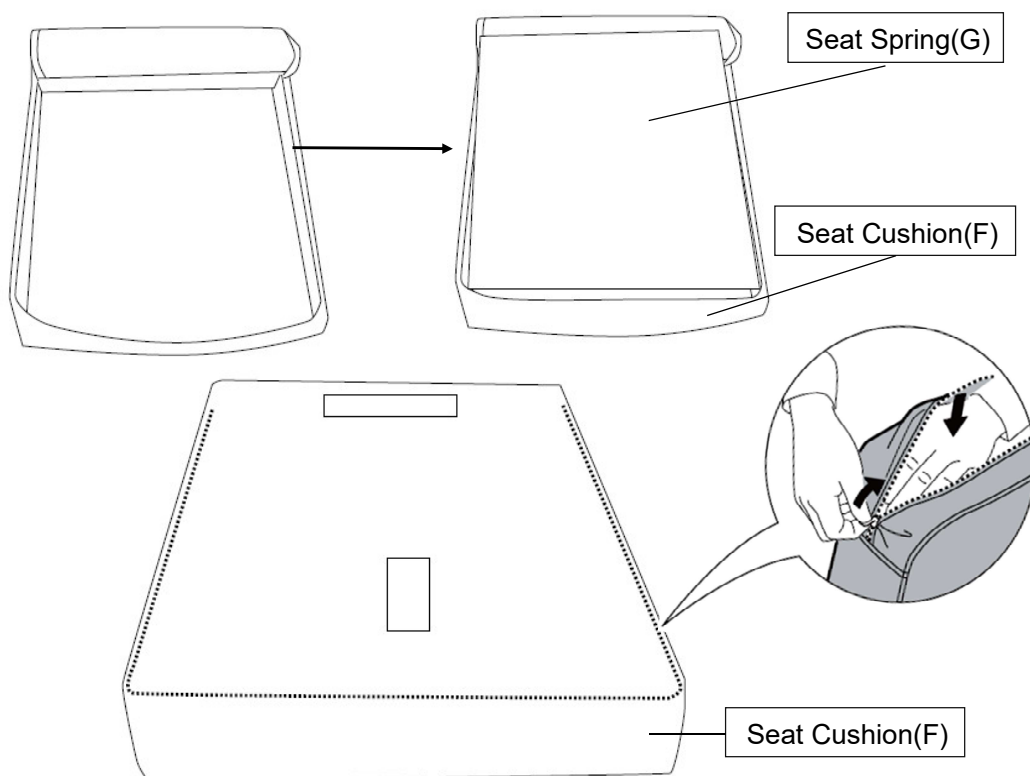

Open the bottom of Seat Cushion(F).Put the Seat Spring(G) into the Seat Cushion(F),then close the zipper,and make sure Seat Spring(G) fits well.


### Step 5

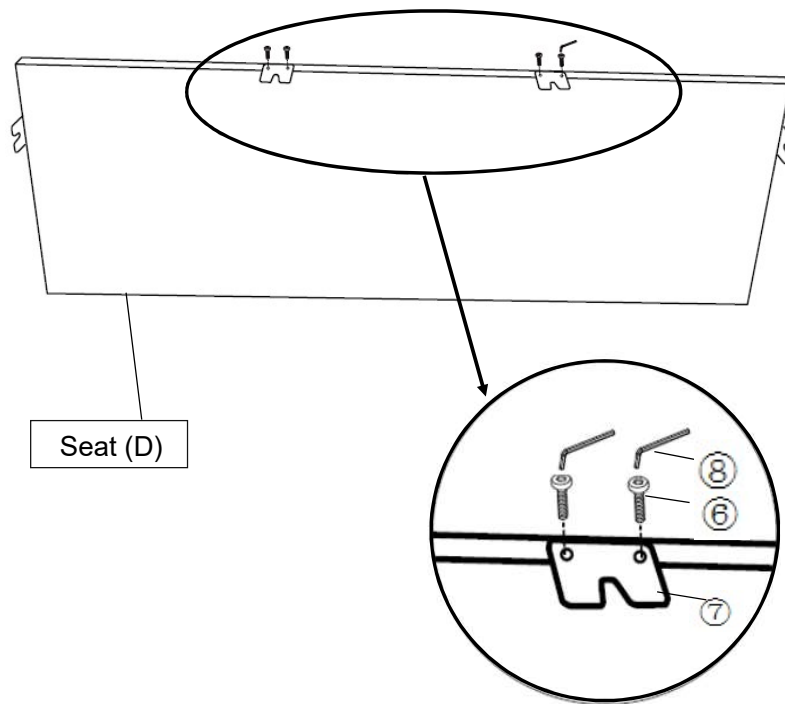

With the assistance of your partner, install the Iron Sheet(7) into the Seat(D) using Bolt(6) with Allen Key(8) by turning clockwise until tight.


**Caution: When assembling the Iron Sheet(7), the direction of Iron Sheet(7) should be the same as the preserved Iron Sheet at two sides of Seat (D).**

### Step 6

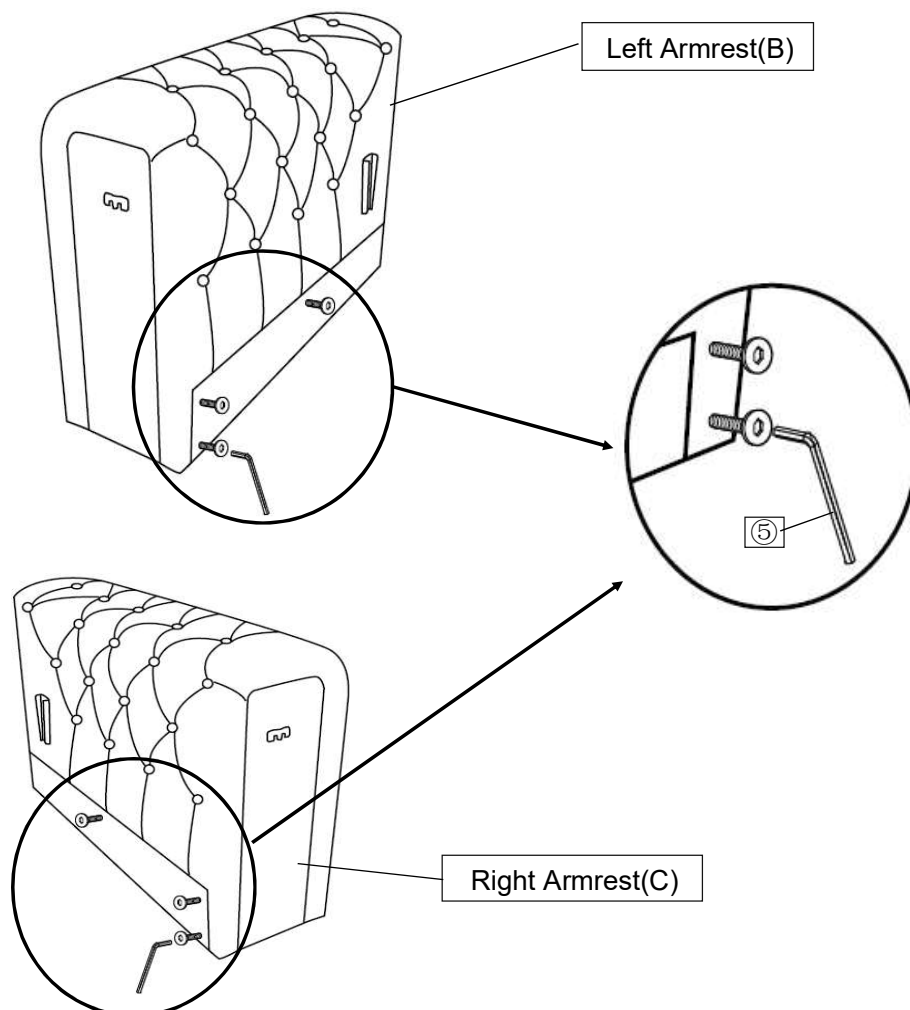


Take the Left Armrest(B) out and position right side up,loosen preserved bolts by Allen Key(⑤) .  
Repeat the same step to loosen preserved bolts of Right Armrest(C).

### Step 7

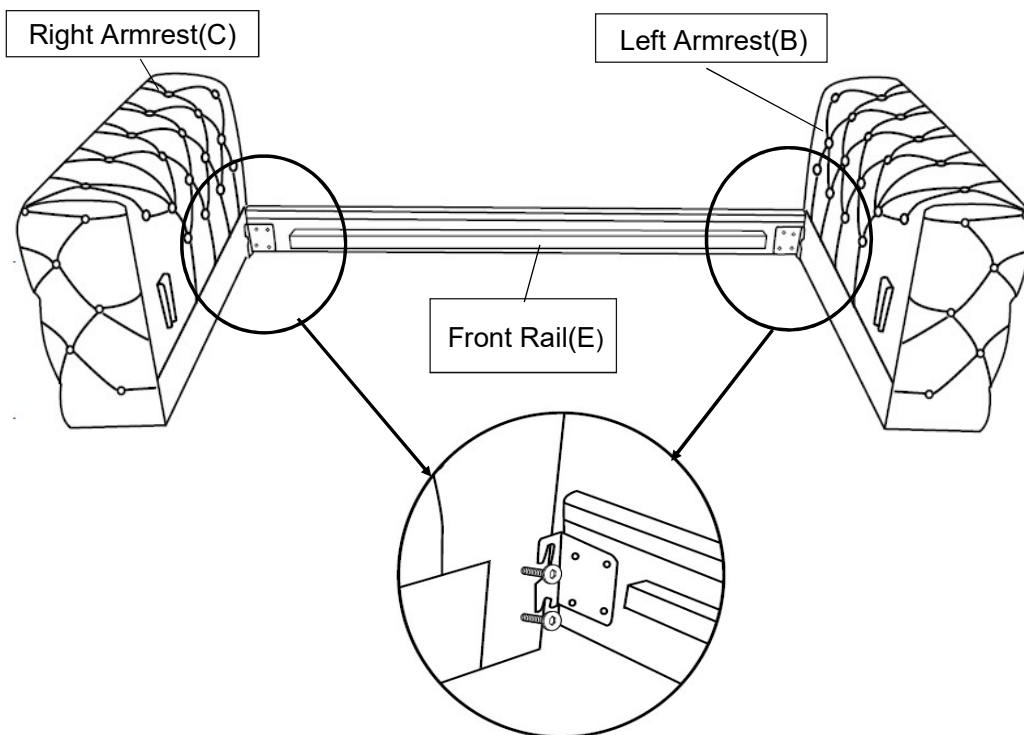

With the assistance of your partner,slide the hook in the eng of Front Rail(E) into the bolts on the Left Armrest(B) and Right Armrest(C), as shown above.


### Step 8

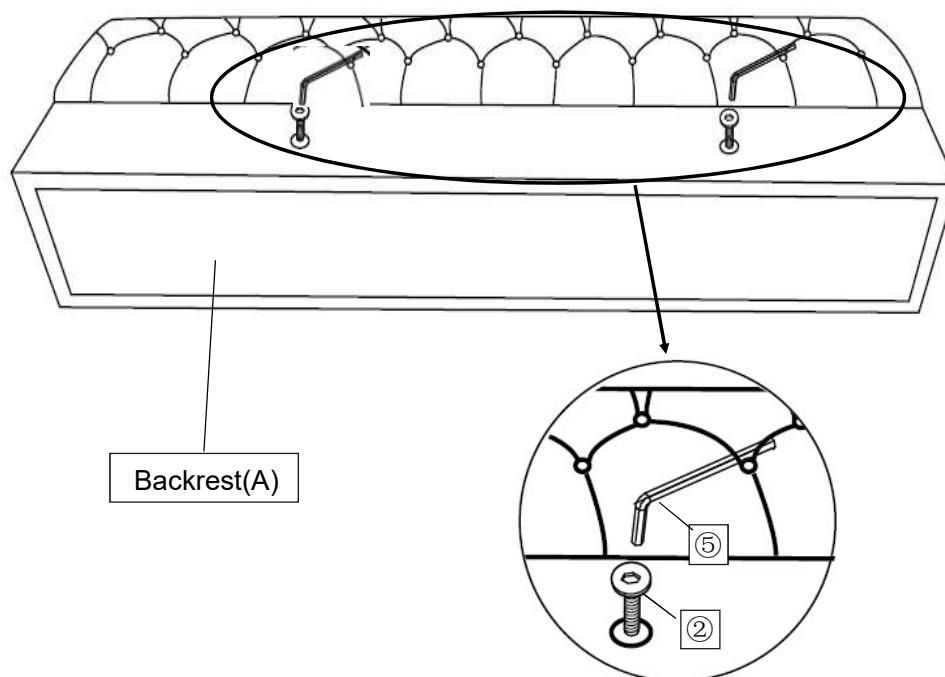



Place Backrest(A) facing up.  
Loosen the 2 Bolt(②) in Backrest(A) around half inch by Allen Key(⑤).

### Step 9

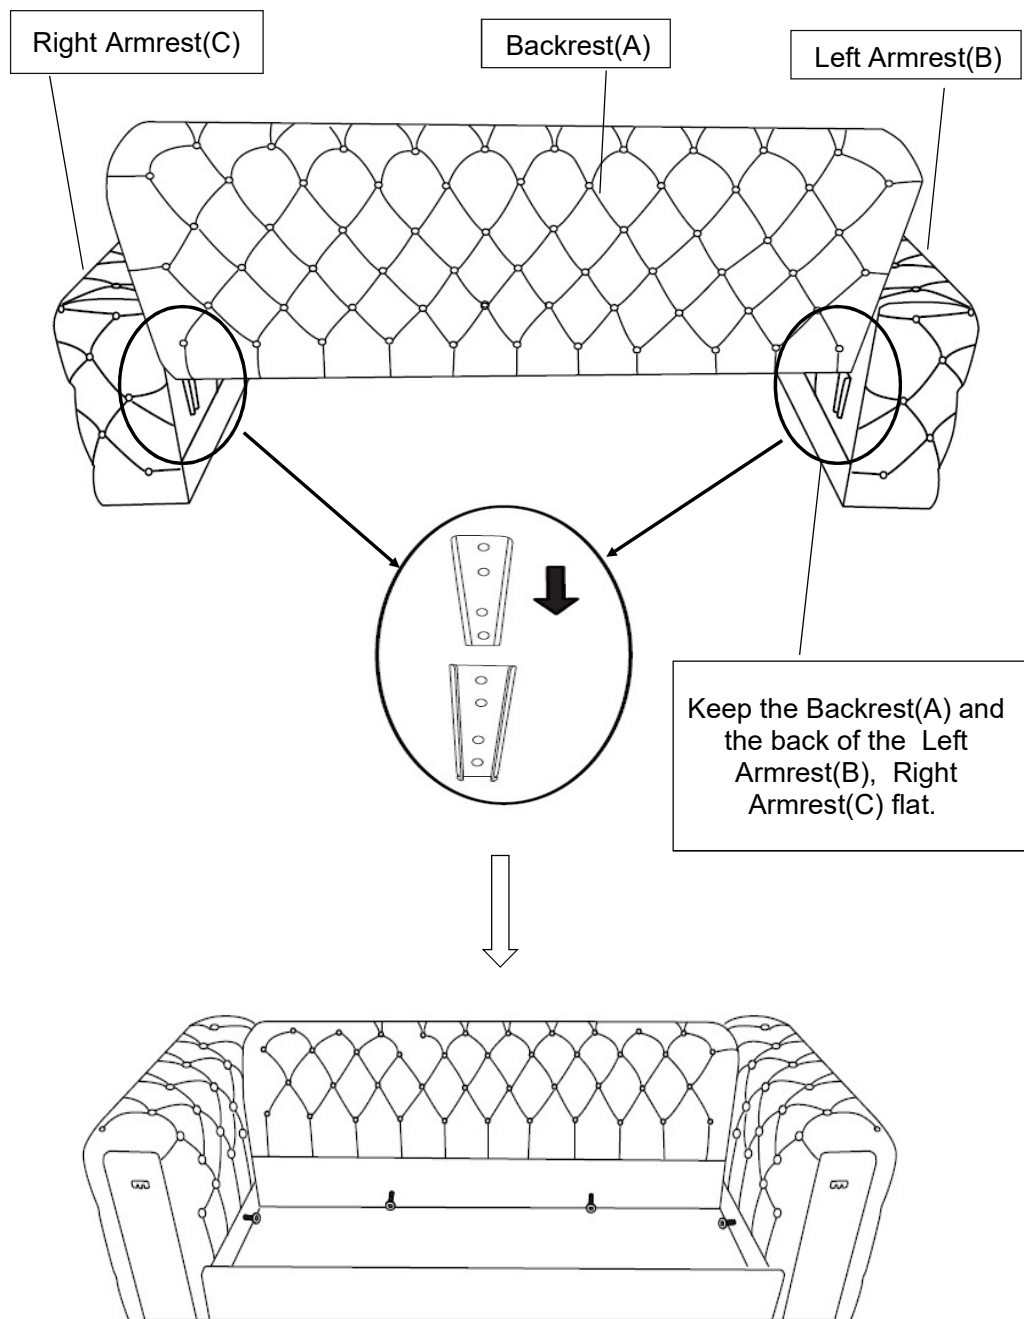

Slide the Tapered Connectors on the Backrest(A) into the Tapered Connectors on the Left Armrest(B) as shown in the picture.

Repeat the same step with the Right Armrest(C).

Note: Make sure the Tapered Connectors on Backrest(A) lock into the Tapered Connectors on the Left Armrest(B) and Right Armrest(C).


Keep the Backrest(A) and the back of the Left Armrest(B), Right Armrest(C) flat.

Assistance from an adult partner is necessary for this assembly process.

During this assembly process - do exercise caution. You may need to use your hand to press down and or pave away the padded surface to facilitate the 'slip and slide' assembly.

Caution: Ensure that your fingers do not get caught or pinched in the assembly process.

### Step 10

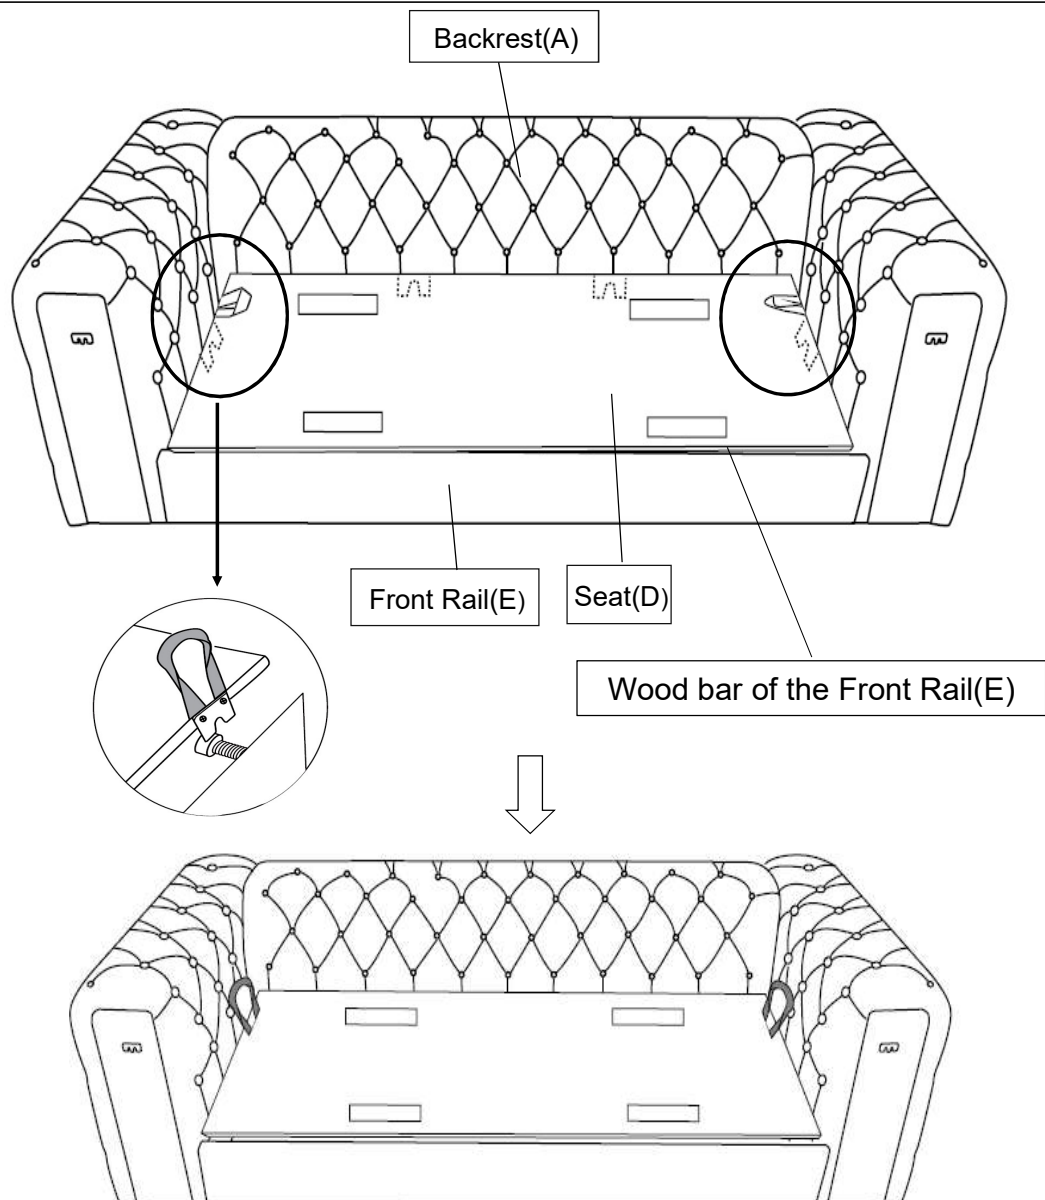


With the assistance of your partner, lift the rope on the two sides of Seat(D) by hand.

Put the Seat(D) on the wood bar of the Front Rail(E) and then slowly place it down as shown above.

**Note: All the u-shaped iron sheet need clamped to the bolt.**

### Step 11

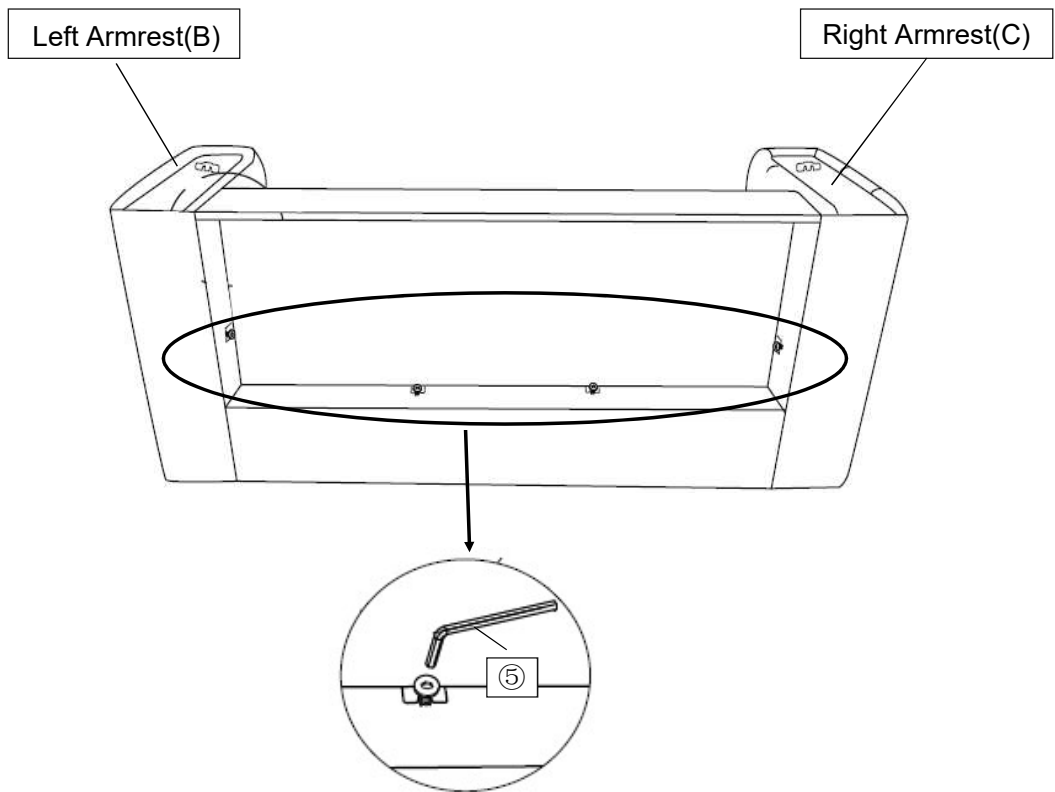


Tilt and lay the Sofa onto a flat surface.

Tighten the Bolts in the bottom of the Backrest(A), Left Armrest(B) and Right Armrest(C) by Allen Key(⑤) as shown above.


Tighten the Bolts fully in a sequential manner.

### Step 12

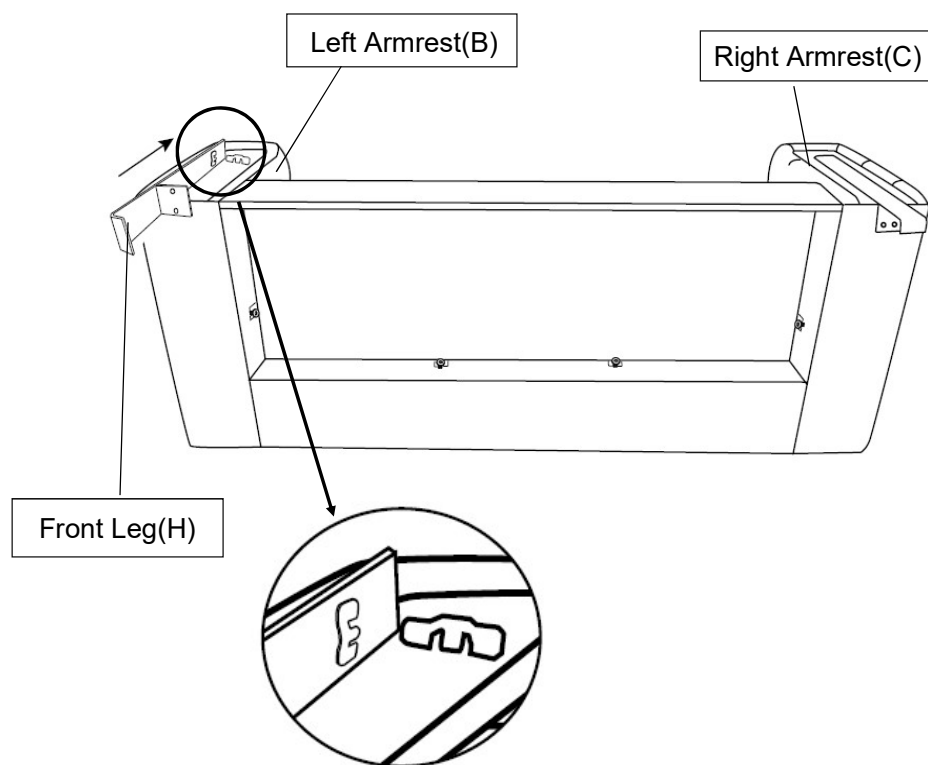


Take the Front Leg(H) slip into the Left Armrest(B) as shown above,  
Repeat the same step to install the remaining Front Leg(H) on Right Armrest(C).

### Step 13

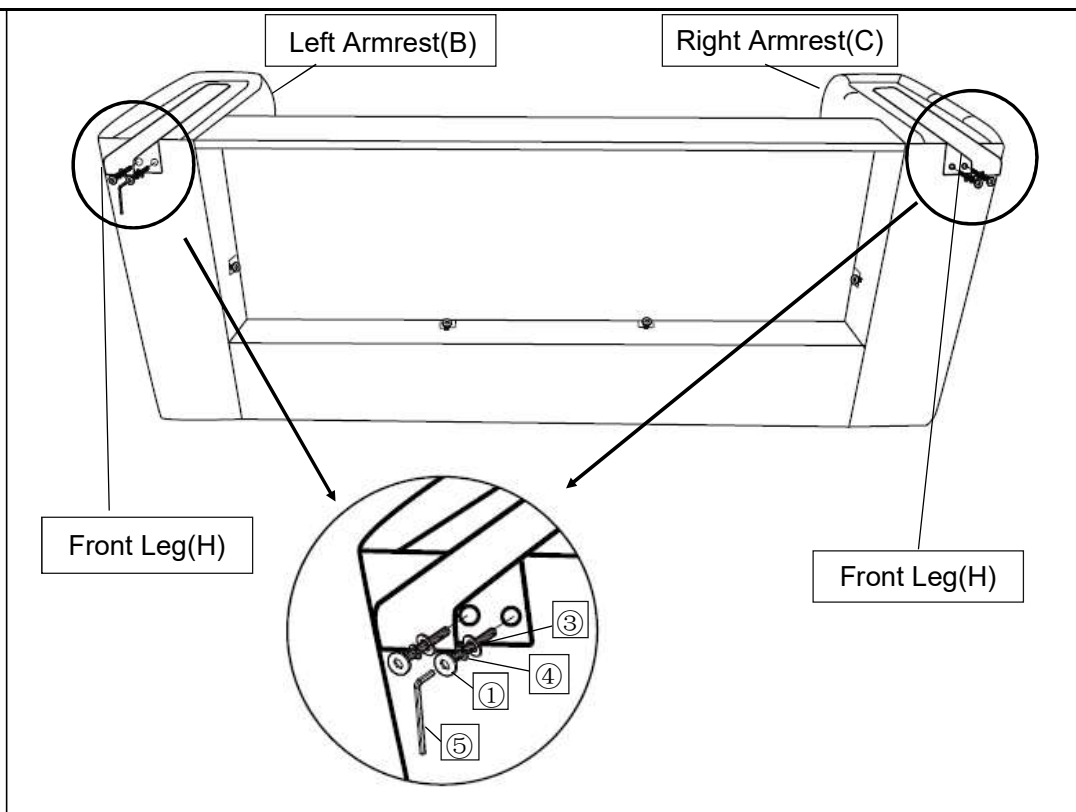


Attach Front Leg(H) to the Left Armrest(B)&Right Armrest(C) using the Bolt(1),Spring Washer(4),Flat Washer(3) with Allen Key(5) by turning clockwise until tight.

### Step 14

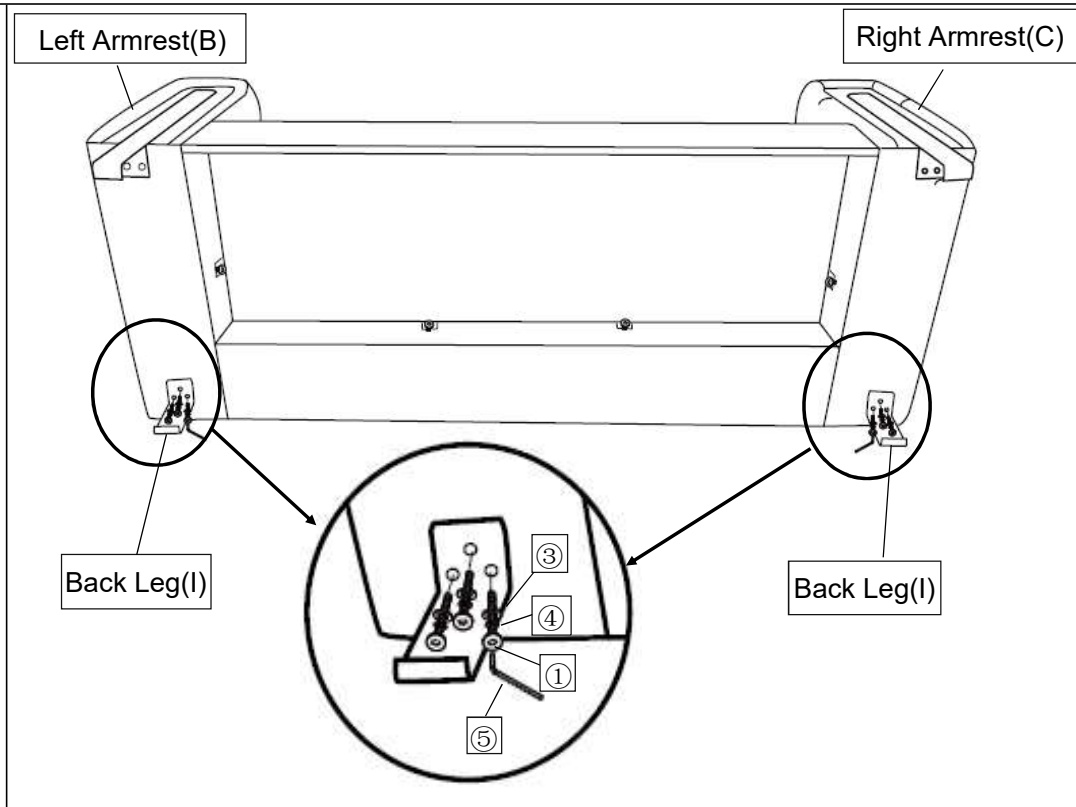

Attach the Back Leg(I) to the Left Armrest(B)&Right Armrest(C) using the Bolt(1),Spring Washer(4),Flat Washer(3) with Allen Key(5) by turning clockwise until tight.


Step 15

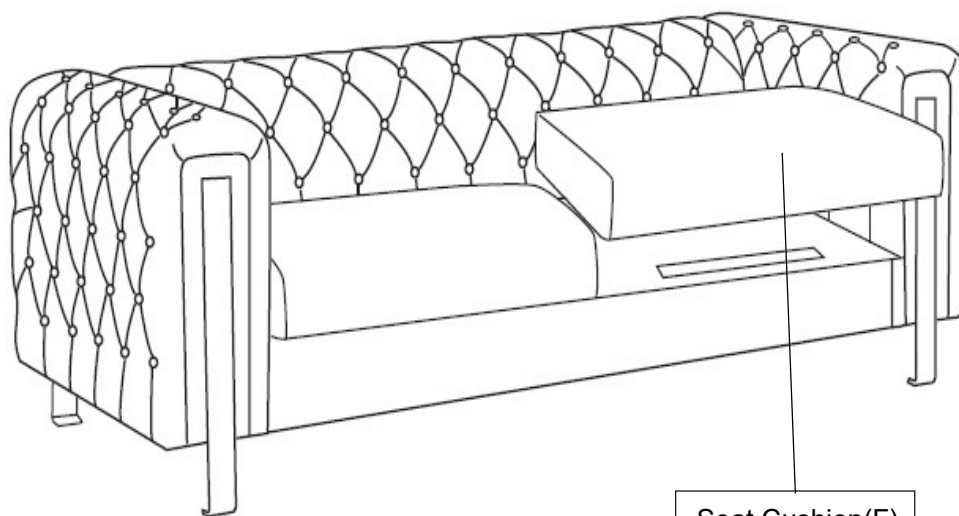

Seat Cushion(F)

Position the sofa right side up, put the Seat Cushion(F) on the sofa.

Step 16

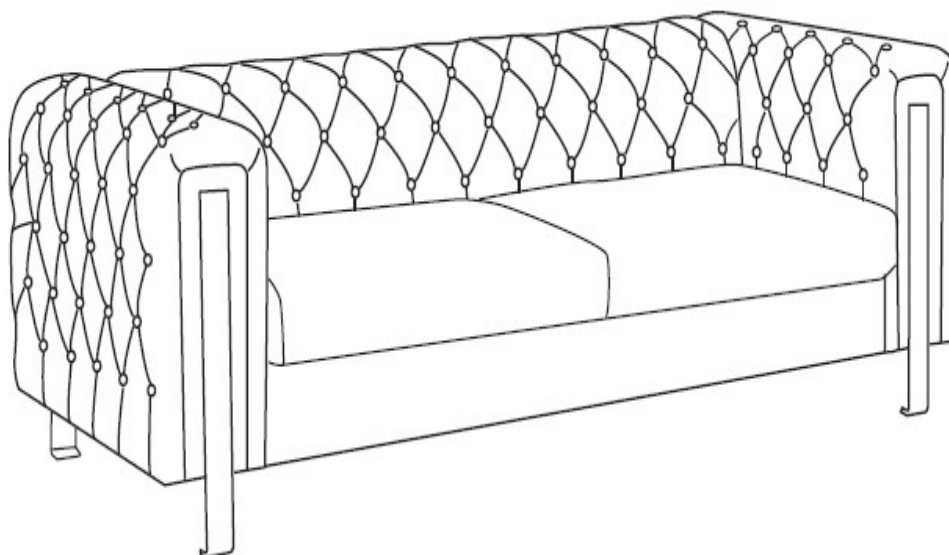

Your Sofa is ready for use.  
**This Sofa can only be used on a flat, level surface.**

## Care & Maintenance



- Furniture may scratch floors. We recommend using furniture pads to protect your floors.



- Do not put hot items directly on furniture surface.



- Do not clean furniture with harsh cleansers or polish.



- Do not place furniture under direct sunlight.



- Do not place furniture near heating or cooling vents.



- Do not write on furniture without a padded barrier to protect the surface.



- Do not place furniture outside . For indoor use only.



- Not for commercial use. For residential use only.



- Stains may be removed with mild soap solution and damp cloth.



- Children should not climb or jump on the furniture.



- Dust and pick-up spills using a clean, non-colored, lint-free cloth.