



1. Assembled the split parts ① to a completely ring fixture like picture showed, pushed the split parts and fix with bolt screw ②.

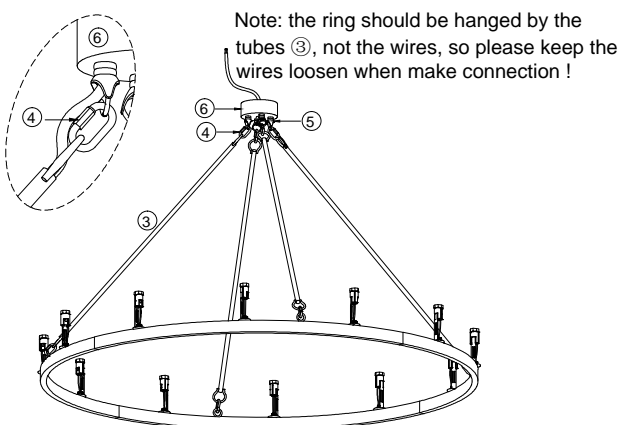


2. Let the wire go through the connected tube ③, hang the ring ① to the junction box ⑥ with carabiner hook screw connection ④, let the wire go through the junction box ⑥.

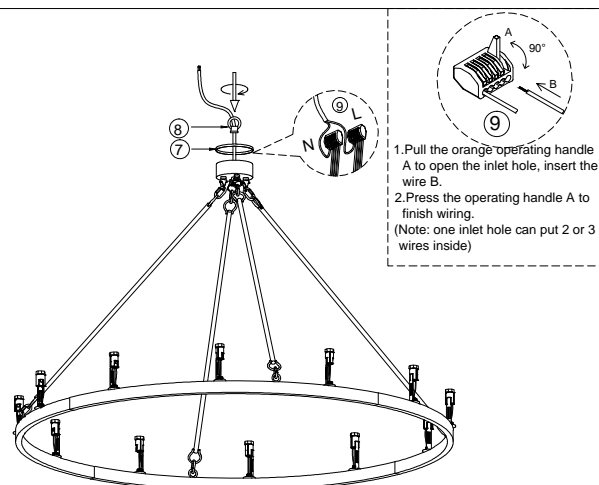


3. Connect all the wires by parallel with splicing connector ⑨ (all live line-L use one connector, and neutral Line-N use another connector).

4. Let the wire go through the cover ⑦ and hanging ring ⑧, rotate ring 8 to fix the cover ⑦ to the junction box ⑥.

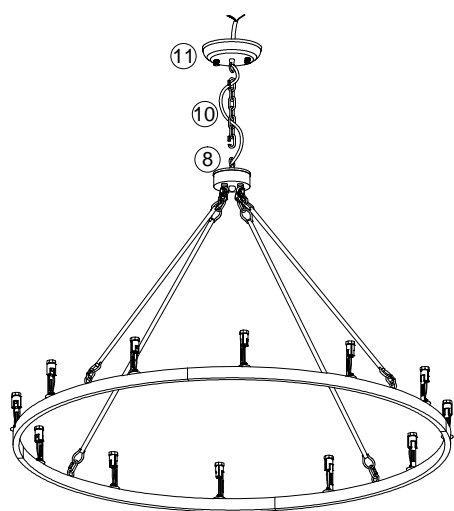

5. Connect the canopy ⑪ and the light fixture ⑧ with chain ⑩.

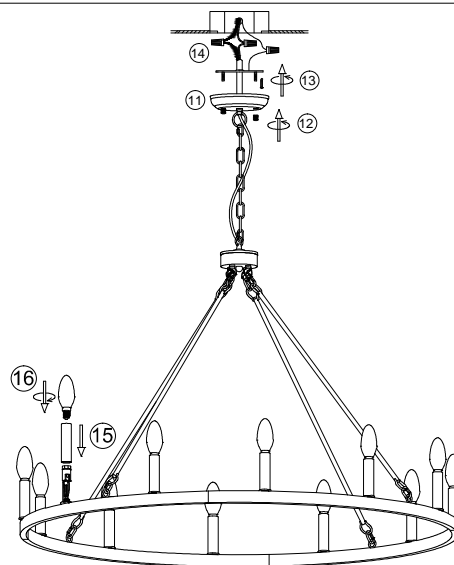

6. Install the bracket to the ceiling junction box with screw ⑬.

7. Connect the wire to your home line with cap connectors ⑭.

8. Install the fixture to the bracket with cap nuts ⑫.

9. Put the cylinder tube ⑮ on top of bulbholder and install the bulb ⑯.

D0126-12

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !