

## 6LT PENDANT LIGHT ASSEMBLY/INSTALLATION INSTRUCTIONS

*Please read carefully and save these instructions, as you may need them at a later date.*

### CAUTION

**WARNING:** Risk of Fire. Min 75°C supply conductors. Consult a qualified electrician to ensure correct installation.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### TOOLS REQUIRED

Phillips screwdriver.


## ASSEMBLY AND INSTALLATION

**Turn off the power at fuse or circuit breaker.**

1. Attach the NIPPLE to the MOUNTING BAR, then secure it with a WASHER and HEX NUT.
2. Attach the MOUNTING BAR to the OUTLET BOX by using two MOUNTING SCREWS.
3. Secure the TOP LOOP to the NIPPLE.
4. Install the FIXTURE FINIAL to IRON RACK. Then, install the FIXTURE into IRON RACK.
5. Choose the length of the CHAIN you need, then weave the FIXTURE WIRE and the FIXTURE GROUND WIRE through the CHAIN, COLLAR and CANOPY.
6. Open the top and bottom section of the CHAIN using a phillips screwdriver (not included) and pliers (not included), then attach it to the LOOP. Close the CHAIN.
7. Thread the FIXTURE WIRE and FIXTURE GROUND WIRE through the TOP LOOP, NIPPLE and MOUNTING BAR.
8. Pull out the SUPPLY WIRES and SUPPLY GROUND WIRE from the JUNCTION BOX. Make wire connections using the WIRE CONNECTORS:
  - The smooth wire (marked) from the fixture to the black wire from the power source.
  - The ridged wire (unmarked) from the fixture to the white wire from the power source.
  - Attach the FIXTURE GROUND WIRE to the MOUNTING BAR with the GREEN GROUND SCREW. Then connect it to the SUPPLY GROUND WIRE with a WIRE CONNECTOR.Carefully put the wires back into the JUNCTION BOX.
9. Attach the CANOPY to the MOUNTING BAR by inserting the TOP LOOP, then secure it with the COLLAR.
10. Install BULBS(not included). See relamping label at socket area or packaging for maximum allowed wattage.

**Turn on the power at fuse or circuit breaker.**

## ASSEMBLY AND INSTALLATION (CONT.)

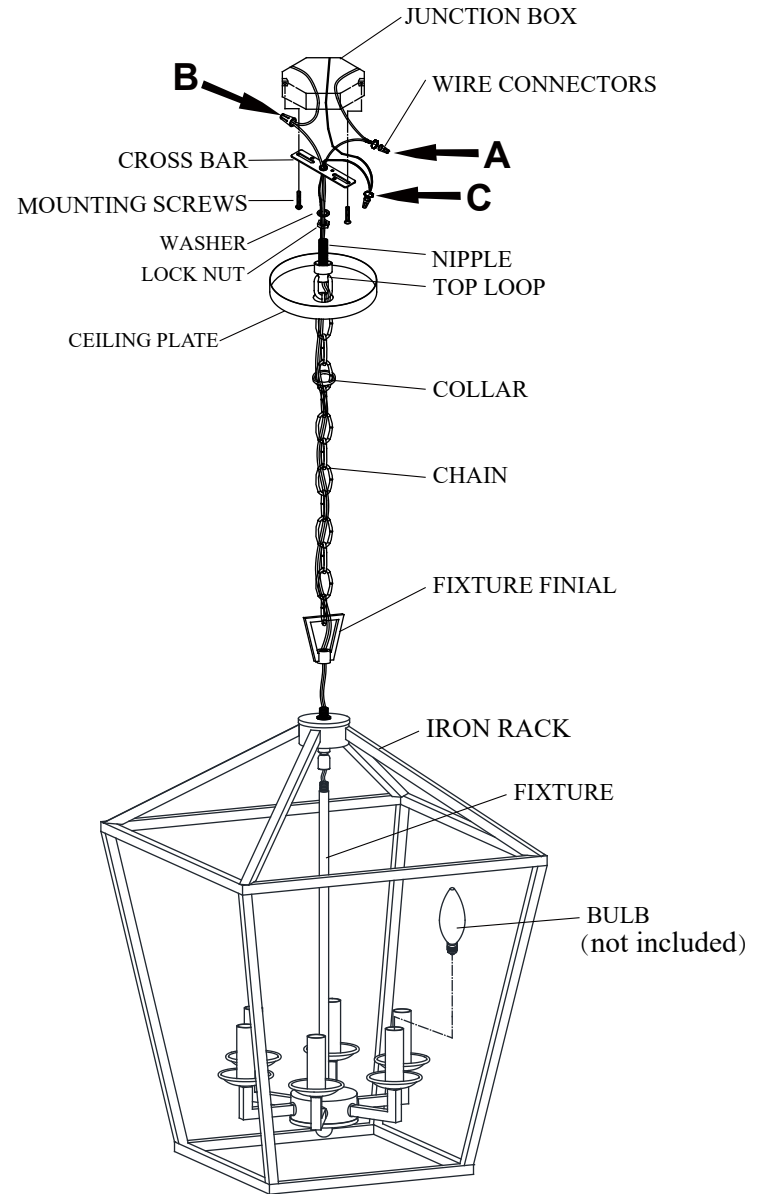

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,  
CONSULT A LICENSED ELECTRICIAN.**