ASSEMBLY INSTRUCTIONS



InspecIt the wire inaulation for any cuts abrasions, or exposed copper that may have reside during shipping it there is a defect

Before startig installation of this fixture of removal of a previous fixtufe ,disconnect the power by turning off the circuit breaket of by

TOOLS REQUIRED
















Wire Cutter



HARDWARE INCLUDED









S-shaped iron sheet














Hex Nut Mounting Screws 2

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS



INSTALLATION

STEP 1

Unscrew the ball nust from the mountinig unit Use the mounting screws to attach the mounting unit

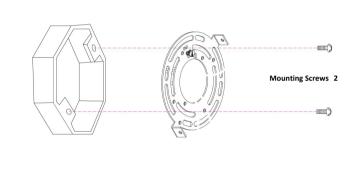

STEP 2

Make the electrical connection from the junction box to the fixturet Connect the ground wire to the mounting unit using the preinstalled green ground screw Then, connect the positive, negative and ground wires with the supplied wire unts, Secure with electrical tape

