#### CARE AND MAINTENANCE

Unplug lamps before using any cleaning solutions. Dust shades with a feather duster or with an appropriate vacuum-brush attachment. Wipe with a soft, dry cloth and clean lamp bases with the methods appropriate to the material. Avoid the use of chemicals and household cleaners as they may damage the finish.



#### **NOTICE& IMPORTANT SAFETY INSTRUCTIONS**

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- \*The external flexible cable or cord of this luminaire cannot be replaced;


If the cord is damaged, the luminaire shall be destroyed

\*\*This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. this plug will fit in a polarized outlet only one way. if the plug does not fit fully in the outlet, reverse the plug, if it still does not fit, contact a qualified electrician.never use with an extension cord unless the plug can be fully inserted. do not attempt to defeat this safety feature.

# **Part List and Hardware List**

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
А	Lamp base		1X	E	Bulb	Q	1X
B1+B2+ B3	Piping		1X	F	Knob	•	1X
С	Piping		1X	Н	Shade		1X
D	Socket	•	1X				

Model# FLL4064A /FLL4064A Product Dimensions: 16.5"LX10"WX55.75-65"H

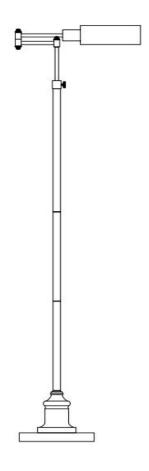


### **PREPARATION**

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 6 minutes.

### PLEASE USE ON/OFF TYPE"T" BULB MAX 40-WATT

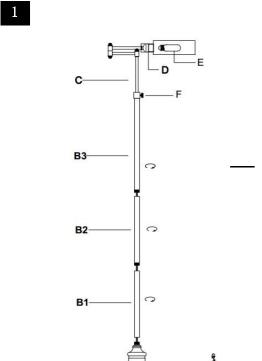


Step 1
Make sure all parts could be aligned before assemble
Do not rotate lamp body too hard avoid base screw broken
Fasten the Piping (B1) onto the lamp Base (A)
Fasten the Piping (B2) onto the Piping(B1)
Fasten the Piping (B3) onto the Piping(B2)

Fasten the Piping (B3) onto the Piping(B2)
You can screw the Knob(F) to adjust the height of Piping(C)
Be careful not to twist the power cord and tighten securely

E D

Step2
Insert the bulb(E) into the socket(D).

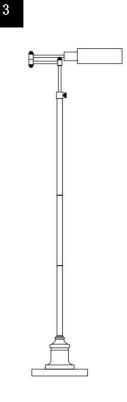

Step3
Put the light on a level surface to che if everything is stable.

## **ENJOY YOUR LAMP**