CARE AND MAINTENANCE

Store outdoor furniture indoors or cover well when not in use.
Remove wooden furniture from standing water. Dust regularly with small brush or vacuum Spills should be taken care of immediately before they harden or stain with a slightly dampened sponge.



NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * This item may require periodic tightening

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY
А	Frame back		1X
В	Frame Seat		1X
С	Front Leg		1X
D	Back Leg		1X
E	Corner		2X
F	Wheel	0	2X
G	Armrest		2X
Ι	Screws	∭////////////////////////////////////	8X
К	Screws	M6x50	4X

PIECE	DESCRIPTION	PICTURE	QUANTITY
L	Bolt	⊚ M6x40	2X
М	Bolt	(a) (b) (b) (b) (b) (c) (d) (d) (d) (d) (d) (d) (d) (d) (d) (d	6X
N	Bolt	M8x65	2X
0	Insert Nut	್ರ M6x15	2X
Р	Insert Nut	●	6X
Q	Insert Nut	● M8×20	2X
Х	Plastic Washer	⊚ M6.5/20X2	2X
Z	Plastic Washer	M8.5/30X2	6X
Υ	Metal Washer	M8.5/35X5	2X
Т	Allen key	LG4	2X
Н	Allen key	LG5	1X

Weight Capacity: 600 Ibs Warning: Do not stand on chair

Warning: Do not over torque bolts / screws







Model# PAT7071

Product Dimensions:24.8" W x 70.87" D x 32.1" H





PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 10 minutes.

Tools Required for Assembly (included): Allen Key

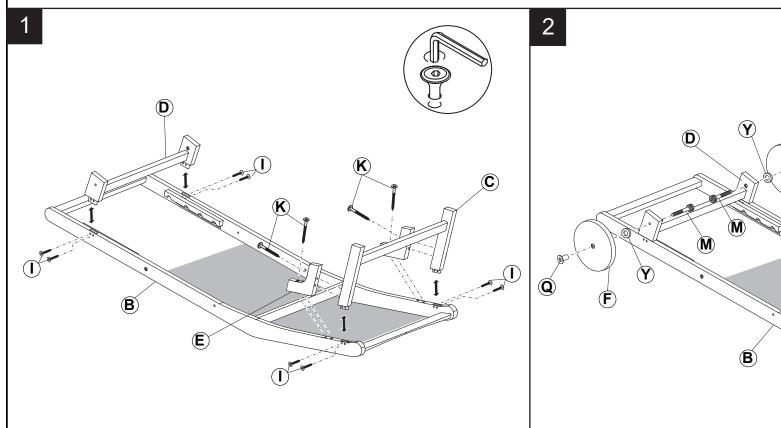

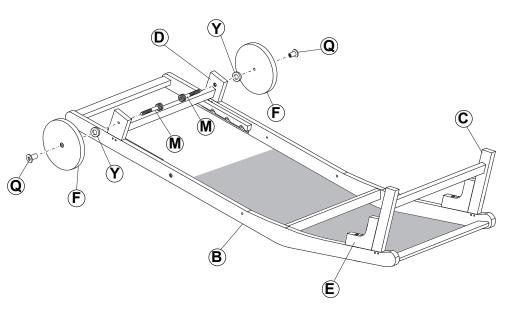

Step 1

Attach Back Leg (D) to Frame seat (B) ,use Screws (I) and tighten with allen key (T).

Attach Front Leg (C) to Frame seat (B) ,use Screws (I) and tighten with allen key (T).

Attach Corner (E) to Frame seat (B) ,use Screws (K) and tighten with allen key (T).

Step 2

Attach Wheel (F) to Back Leg (D) ,use Bolt (M) ,Insert Nut (Q) and Metal Washer (Y) tighten with allen key (T+ H).


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 10 minutes.

Tools Required for Assembly (included): Allen Key

3

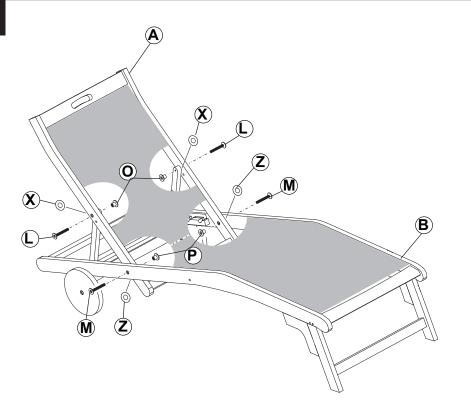

4

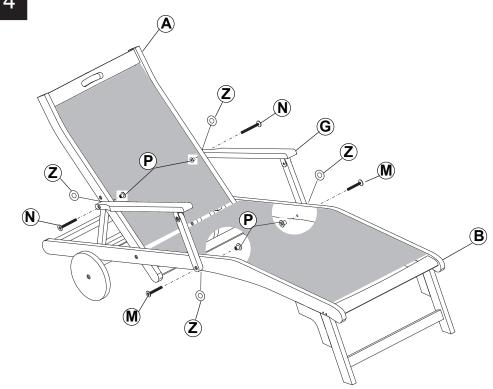

Step 3

Attach Frame Back (A) to Frame Seat (B), Use Bolt (L), Insert Nut (O) and Plastic Washer (X) tighten with allen key (T).

Use Bolt (M), Insert Nut (P) and Plastic Washer (Z) tighten with allen key (T).

Step 4

Attach Armrest (G) to Frame Seat (B), Use Bolt (N), Insert Nut (P) and Plastic Washer (Z) tighten with allen key (T).

Use Bolt (M), Insert Nut (P) and Plastic Washer (Z) tighten with allen key (T). Complete.