



Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:LIT4497A



Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	F	Bead Strand		33X+1X
B	Mounting Plate		1X	G	Bulb		7X
C	Mounting Screw		2X	H	Bottom Frame		1X
D	Top Frame		1X	I	Finial		1X
E	Socket Assembly		1X	J	Canopy Nut		2X

Installation

Step 1

Unpack all parts from cartons carefully.

Separate the Mounting Plate(B) from the Canopy of the Top Frame(D) by removing the Canopy Nut(J) anti-clockwise.

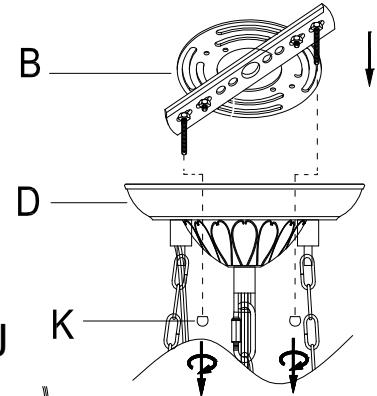


Step 2

Insert the Bulb (G) into the Socket of the Top Frame(D).

Attach the Top Frame(D) to the Socket Assembly(E) by inserting the hooks of each chain to the Allen nuts as Fig.1

Insert the Bulbs(G) into the Sockets of the Socket Assembly(E).

Insert the hooks of each long Acrylic strand and small chain of the Top Frame(D) to the holes in the metal ring of the Socket Assembly(E) as Fig.2

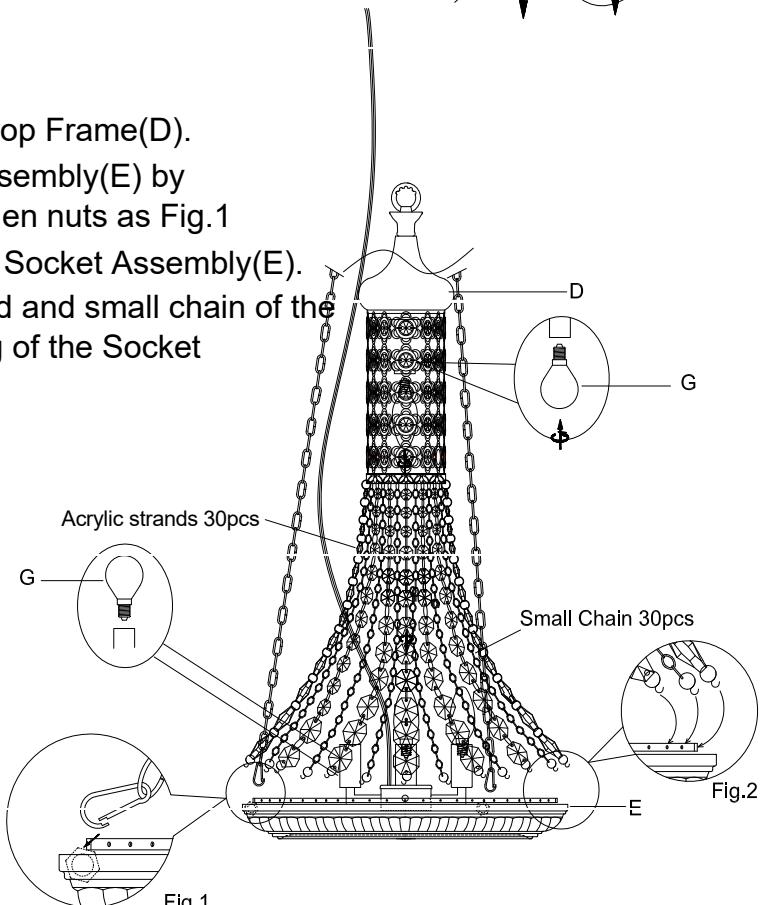


Step 3

Insert the Bulb (G) into the Socket underneath the Socket Assembly(E).

Hook the Bead Strands(F) to the hooks around the sockets as diagram.


Attach the Bottom Frame(H) to the Socket Assembly(E) by turning the Finial(I) clockwise till

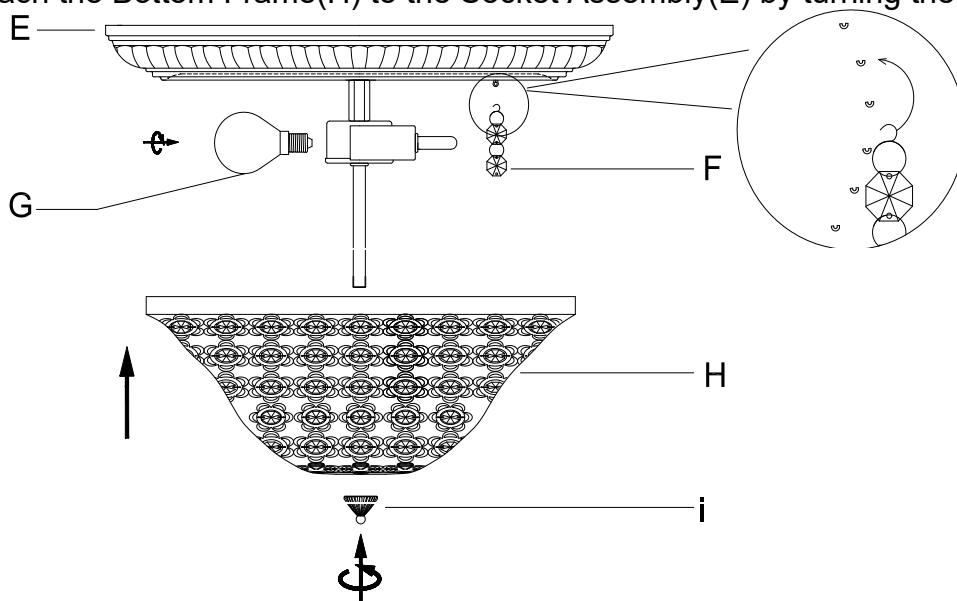

Step 4 Wire connection

Fix the Mounting Plate(B) to the junction box with Mounting Screw (C).

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.


Step 5

Attach the Canopy of the Top Frame(D) to the junction box and fix it by turning the Canopy Nut (J) clockwise.

**PLEASE USE TYPE "B" BULB MAX 40-WATT OR CFL
BULB MAX 13-WATT OR LED MAX 9-WATT
THERE ARE 7 X 4W LED BULBS IN THE BOX.**

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

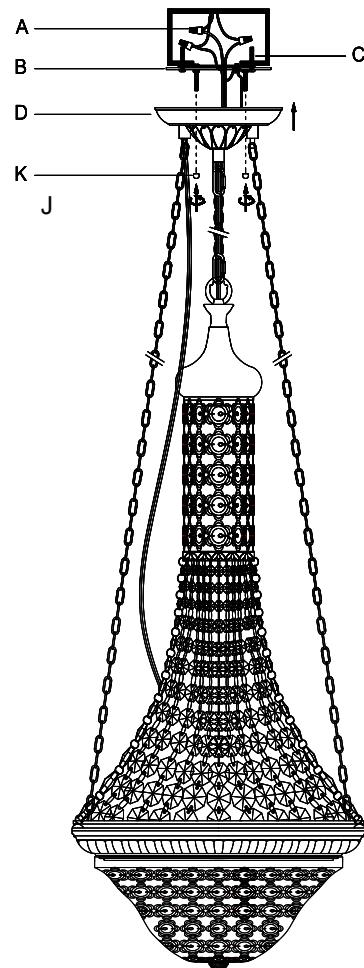

ENJOY YOUR LAMP