


# SAFAVIEH LIGHTING

## Assembly Instruction

**CAUTION** : Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

**ITEM#:SCN4068A-SET2**

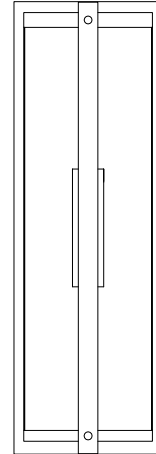

### Care and Cleaning









To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:10 minutes


### Part List and Hardware List

A	Wire	x3		E	Ground Screw	x1	
B	Circular	x1		F	Fixture Body	x1	
C	Mounting Screws	x4		G	Clear Glass	x1	
D	Outlet Box Screws	x2		H	Bulb	x2	

# Installation

## Step 1


Attach the Circular (B) to the junction box using the Outlet Box Screws (D) on the wall.

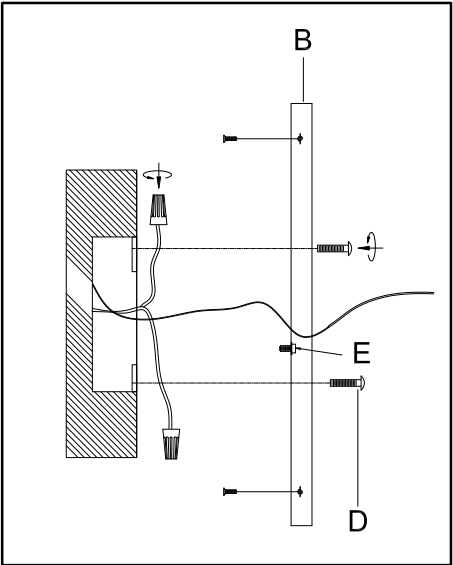

## Step 2


Using the Wire (A) connected the positive electrode and the negative pole of the fixture body carefully into the positive electrode and the negative pole in junction box.

Fix the Circular (B) by installing Outlet Box Screws(D). Use four Mounting Screws(C) to fix the Fixture Body(F) to the wall.

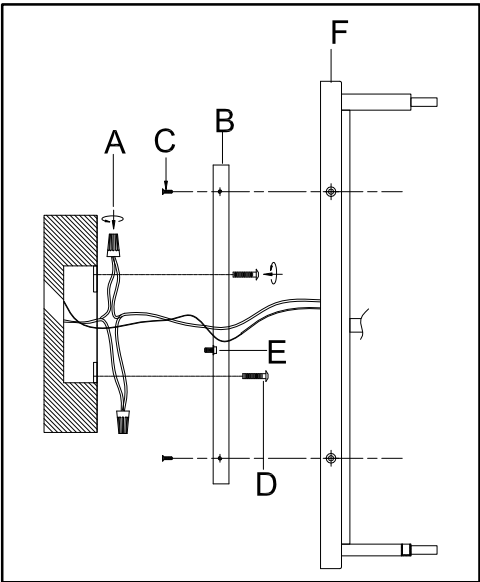


## Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor

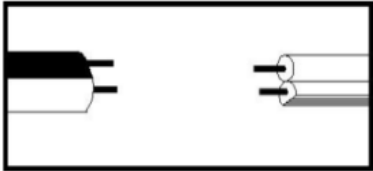

\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left).



## Grounding Instructions:


a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

## Step 3

Insert the Clear Glass(G) into the U-Shaped groove of the Fixture Body(F) and lock the Bulb(H) into the lamp base.

PLEASE USE TYPE "B" BULB MAX 40-WATT OR LED BULB MAX 4-WATT THERE ARE 2x4-WATT LED BULB IN THE BOX.

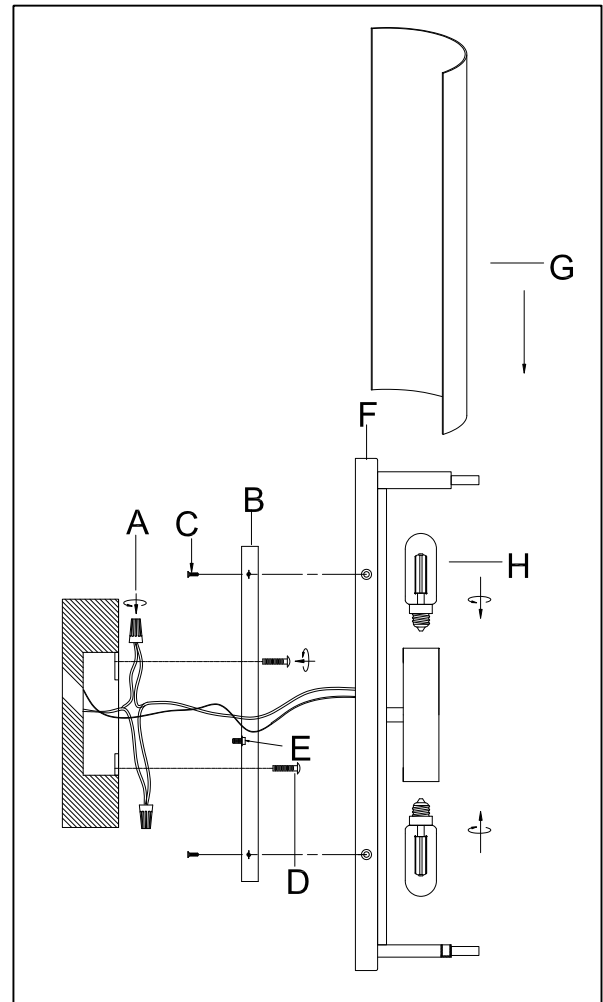

## Step 4

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP