


# SAFAVIEH LIGHTING

## Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

**ITEM#:SCN5000A**

Size:W22.8"\*H9.84"\*E6.89"

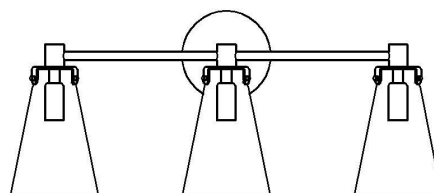

## Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


## Part List and Hardware List

| PIECE     | DESCRIPTION    | PICTURE                                                                             | QUANTITY  | PIECE     | DESCRIPTION  | PICTURE                                                                               | QUANTITY  |
|-----------|----------------|-------------------------------------------------------------------------------------|-----------|-----------|--------------|---------------------------------------------------------------------------------------|-----------|
| <b>A</b>  | Mounting bar   |  | <b>1X</b> | <b>B</b>  | Fixture body |  | <b>1X</b> |
| <b>A1</b> | Mounting screw |  | <b>2X</b> | <b>C</b>  | Bulb         |  | <b>3X</b> |
| <b>A2</b> | Round nut      |  | <b>2X</b> | <b>D</b>  | Glass        |  | <b>3X</b> |
| <b>B1</b> | Wire nut       |  | <b>3X</b> | <b>D1</b> | Round nut    |  | <b>9X</b> |

# Installation


## Step 1

installing the mounting bar(A) with mounting screw(A1


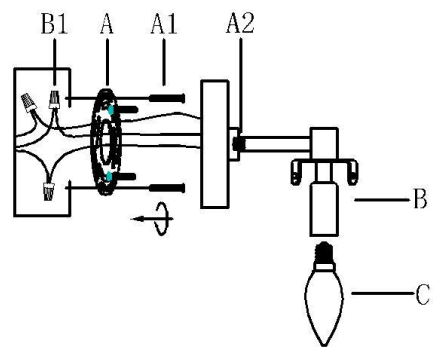


## Step 2 Wire connection

| Connect,Hot,Black or Red outlet Supply Wire to:           | Connect,Neutral,White Outlet Supply Wire to:             |
|-----------------------------------------------------------|----------------------------------------------------------|
| Black                                                     | White                                                    |
| *Parallel Cord(round&smooth)                              | *Parallel Cord(square&ridged)                            |
| Clear,Brown,Gold or Black without Tracer(colored stripes) | Clear,Brwn,Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green)with copper metal conductor      | Insulated Wire(not green)with Silver metal conductor     |




\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)

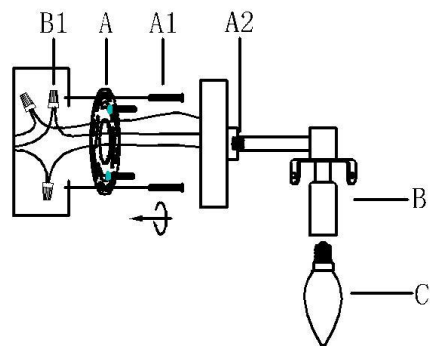

## Step 3

- 1.Secure the fixture body(B) with round nut(A2).
- 2.Place the bulb(C) to the socket.
- 3.Install the glass(D) to the fixture body(B) with round nut(D1).

PLEASE USE ON/OFF TYPE"B" BULB MAX 40-WATT  
OR CFL BULB MAX 13-WATT  
OR LED BULB MAX 9-WATT  
THERE ARE 3PCS 4W LED BULB IN THE BOX.

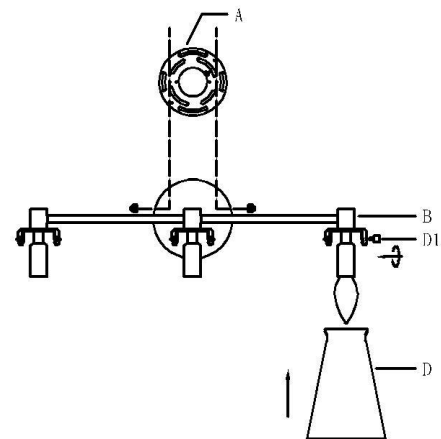

## Step 4

Consult a qualified electrician to ensure correct branch circuit conductor