


# SAFAVIEH LIGHTING

## Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

**ITEM#:PND4083A**

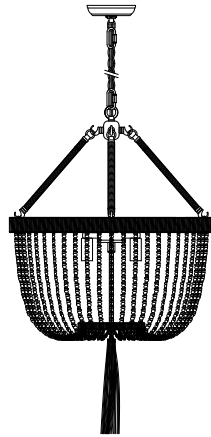

## Care and Cleaning















To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

## Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	G1	Closable link/ cap		2X
B	Mounting Plate		1X	H	Socket Assembly		1X
C	Mounting Screw		2X	I	Tube		1X
D	Hanging Loop		1X	J	Roped Hook		3X
E	Canopy		1X	K	Shade		1X
F	Canopy Nut		1X	L	Finial		1X
G	Chain		1X	M	Bulb		3X

# Installation

## Step 1

Unpack all parts from cartons carefully.  
Connect the Socket Assembly(H) to the Shade(K) by engaging the top Tube(I) into the Socket Assembly(H) and bottom tube through the washer of the Shade(K).Fix the Shade(K) in place by turning the Finial(L) clockwise till tight.

Hook the top Socket Assembly(H) and Shade(K) with Roped Hook(J) as diagram.

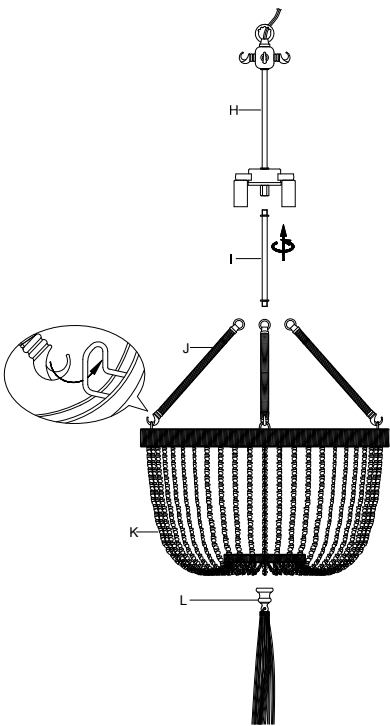


## Step 2

Screw the Chain(G) to the Hanging Loop(D) and the loop of the Socket Assembly(H) with Closable link/cap (G1) as diagram.


Weave the 2 wire power cord and bare ground wire through every other loop to the top of chain(G),Hanging Loop(D),Canopy(E) and Mounting Plate(B) as diagram.

Slide the Canopy Nut(F) then Canopy(E) to the end of the Chain(G).

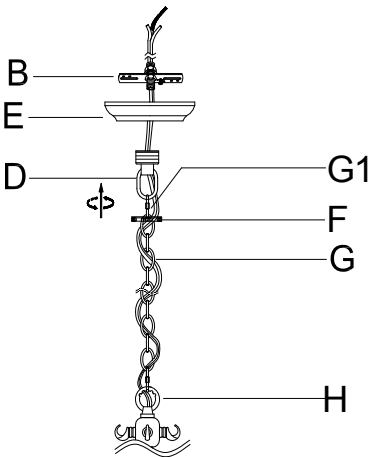

## Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)




### Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

## Step 4

Attach the Mounting Plate (B) onto the junction box by inserting two Mounting Screws (C) and turning clockwise till tight.


Slide the Canopy (E) upward along the chain(G) till the ceiling surface. Fix the Canopy(E) by rotating the Canopy Nut(F)clockwise to engage it with the threaded portion of the Hanging Loop (D) until secure. Do not over tighten this nut.

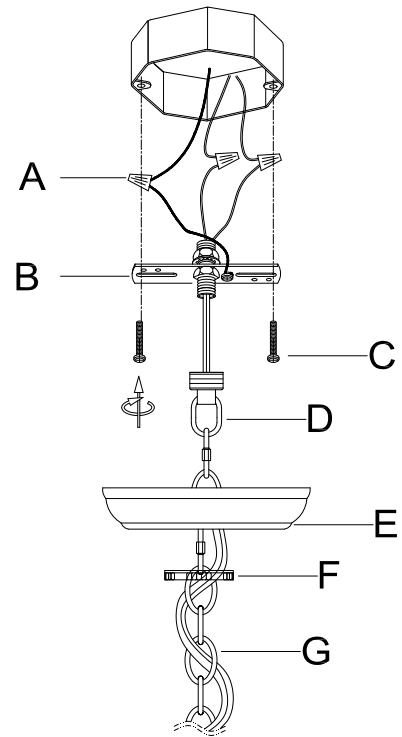

## Step 5

Insert the bulb(M) into the socket.  
DO NOT EXCEED THE SPECIFIED WATTAGE.

**PLEASE USE TYPE "B" BULB MAX 40-WATT  
OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT  
THERE ARE 3\*4W LED BULBS IN THE BOX.**

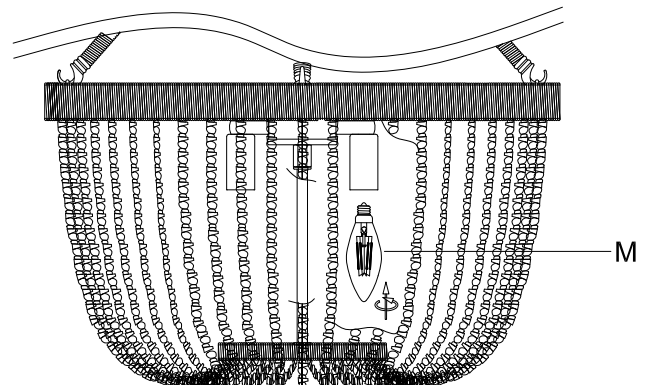

## Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP