
User's Manual



INSTALLATION INSTRUCTIONS

Installation Manual

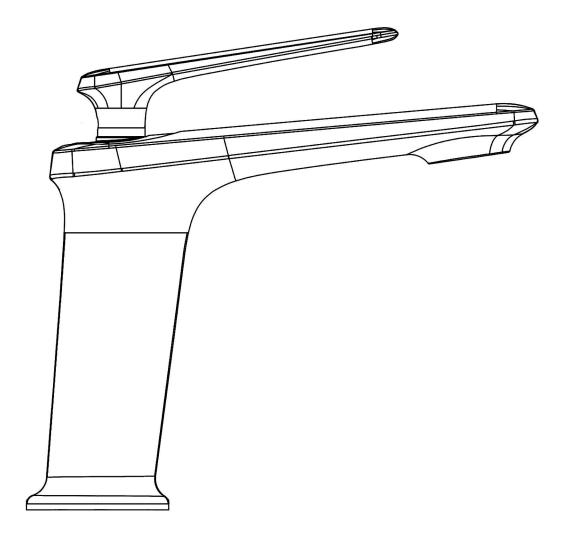

IAPMO RESEARCH AND TESTING, INC.













IAPMO RESEARCH AND TESTING, INC.









CERTIFICATE OF LISTING






IAPMO RESEARCH AND TESTING, INC.















INSTALLATION STEPS


This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.



Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.



1. Shut off the water supplies before installation. Remove the current faucet and clean and dry the sink surface the new faucet will be installed on.



Please Note: Do not remove the customer service tag with the model number and phone number as this will be helpful if you need assistance in the future.

- 3. Apply teflon tape on the threads of the faucet cold & hot water supply tubes in a clockwise direction.
- 4.For Single Hole Installation-Place sillicone sealant beneath the faucet base and install the faucet through the single faucet hole.
- 5. Attach gasket assembly and lock nut from the bottom.

Please Note: Please assemble in numerical order. Tighten but do not over tighten. Use a phillips screwdriver to tighten the 3-screws on the lock nut.


See diagram for visual. Hint - Easier to do with a second person holding the faucet in place while the first person tightens the faucet.


6. Please connect the faucet body with the cold and hot water supply tubes and keep the outer threads side into the body. Keep the hot water tube on the left side and the cold one on the right side, and then tighten.


7. Connect the water supply tube of the faucet with the water supply angle valve, tighten the 9/16" npt with the wrench.

Please Note: No need to use teflon tape for angle valve nut, just tighten It with the

wrench directly.







CLEANING CARE

In order to keep the appearance of faucet clean, bright and good performance, please take care of the faucet as follows;

- 1. Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.





