

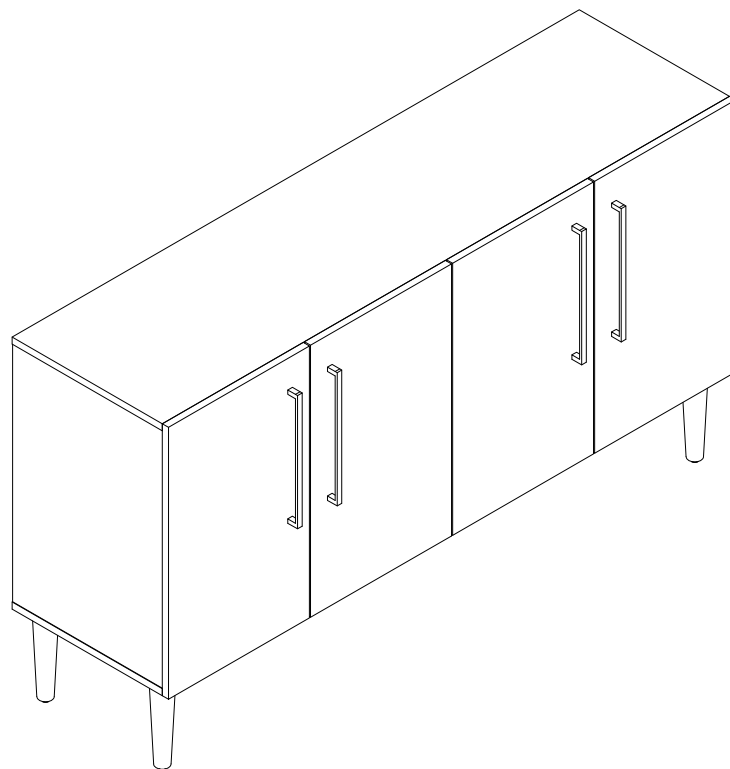















Sideboard CF4214



PART LIST


A 	B 	C 	D 	E 
Top Panel 1 PC	Left Panel 1 PC	Right Panel 1 PC	Bottom Panel 1 PC	Adjustable Shelf 2 PCS
F 	G 	H 	I 	J 
Middle Panel 1 PC	Left Door Panel 2 PCS	Right Door Panel 2 PCS	Leg 5 PCS	Back Panel 1 PC

HARDWARE LIST

#1	#2	#3	#4	#5
				
Cam Bolt	Cam Lock	Wood Dowel	Bolt	Shelf Holder
12 PCS (Extra 1)	12 PCS (Extra 1)	12 PCS (Extra 1)	10 PCS (Extra 1)	8 PCS (Extra 1)
#6	#7	#8	#9	#10
				
$\phi 3 \times 14 \text{mm}$		$\phi 5/32 \times 19 \text{mm}$		
Small Screw	Handle	Round Head Bolt	Straight Bend Hinge	Middle Bend Hinge
26 PCS (Extra 1)	4 PCS	8 PCS	4 PCS	4 PCS
#11	#12	#13		
				
$\phi 3.5 \times 14 \text{ mm}$				
Screw	Allen Wrench	Safety Strap Kit		
48 PCS (Extra 1)	1 PC	2 SETS		

ADDITIONAL TOOLS (Not Provided)


Note: It is not recommended to use power tools during assembly.




Phillips Head Screwdriver

Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.

Step 1. Attach handles (part #7) to door panels (parts G & H) using round head bolts (part #8) and phillips head screwdriver. Attach hinges (parts #9 & #10) to door panels (parts G & H) using screws (part #11) and phillips head screwdriver.

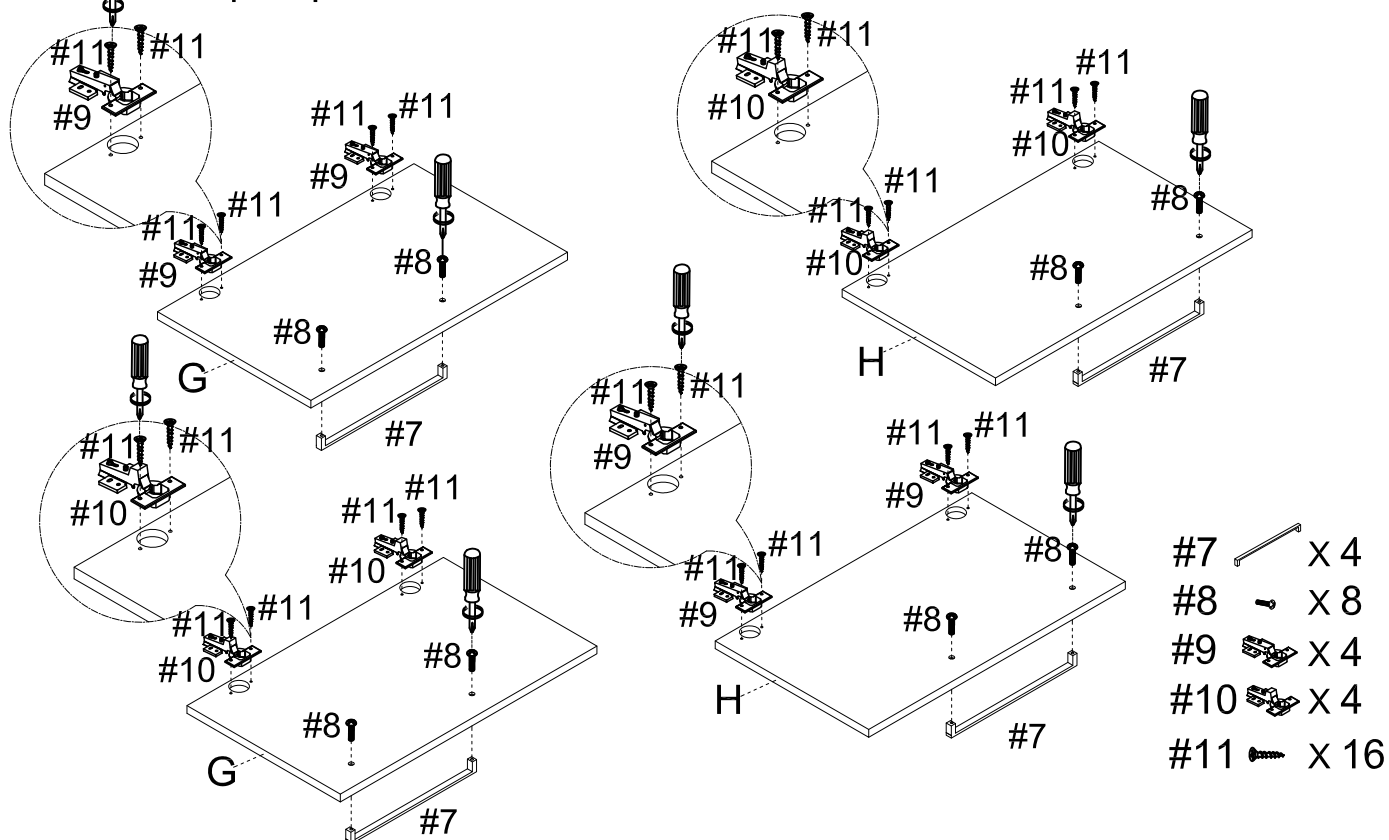


Step 2. Attach legs (part I) to bottom panel (part D) using bolts (part #4), and allen wrench (part #12).

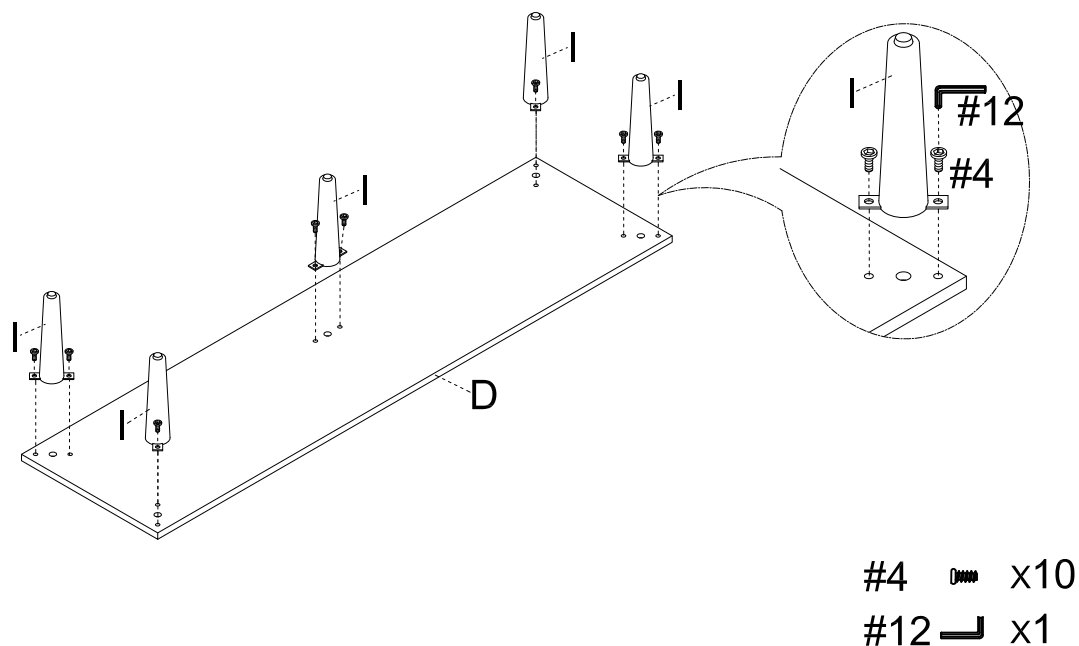


Step 3. Attach panels (parts B, C & F) to bottom panel (part D) using cam bolts (part #1), cam locks (part #2), wood dowels (part #3) and phillips head screwdriver.

Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible. Cam locks must rotate full 180°. See pictured insert.

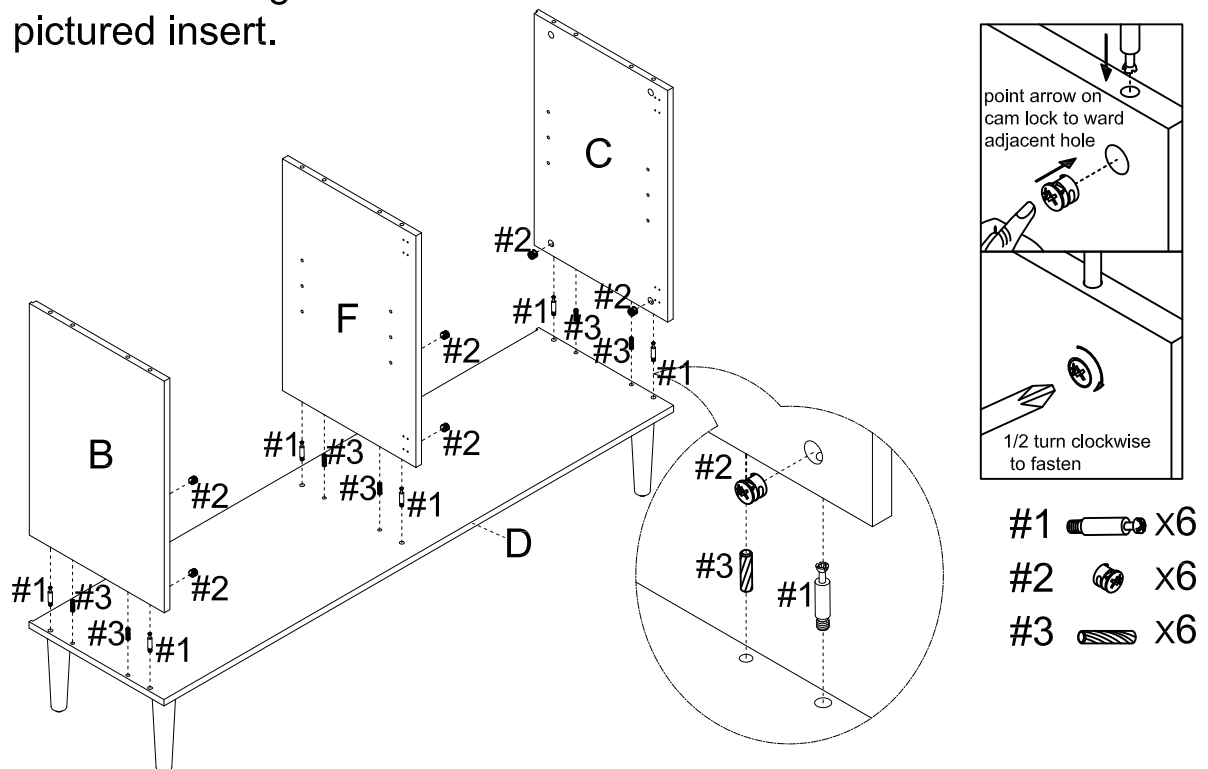


Step 4. Attach top panel (part A) to assembled unit (parts B, C & F) using cam bolts (part #1), cam locks (part #2), wood dowels (part #3) and phillips head screwdriver.


Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible. Cam locks must rotate full 180°. See pictured insert.

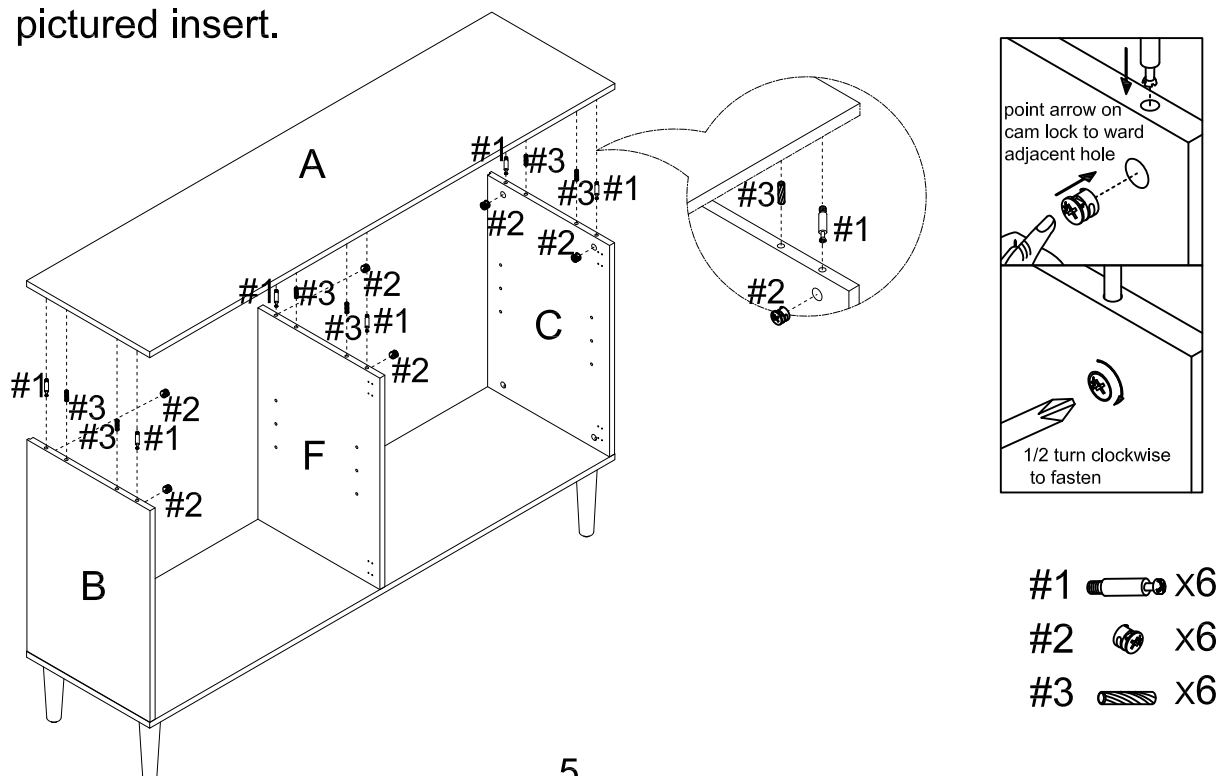


Step 5. Attach back panel (part J) to assembled unit (parts A, B, C, D & F) using small screws (part #6) and phillips head screwdriver.

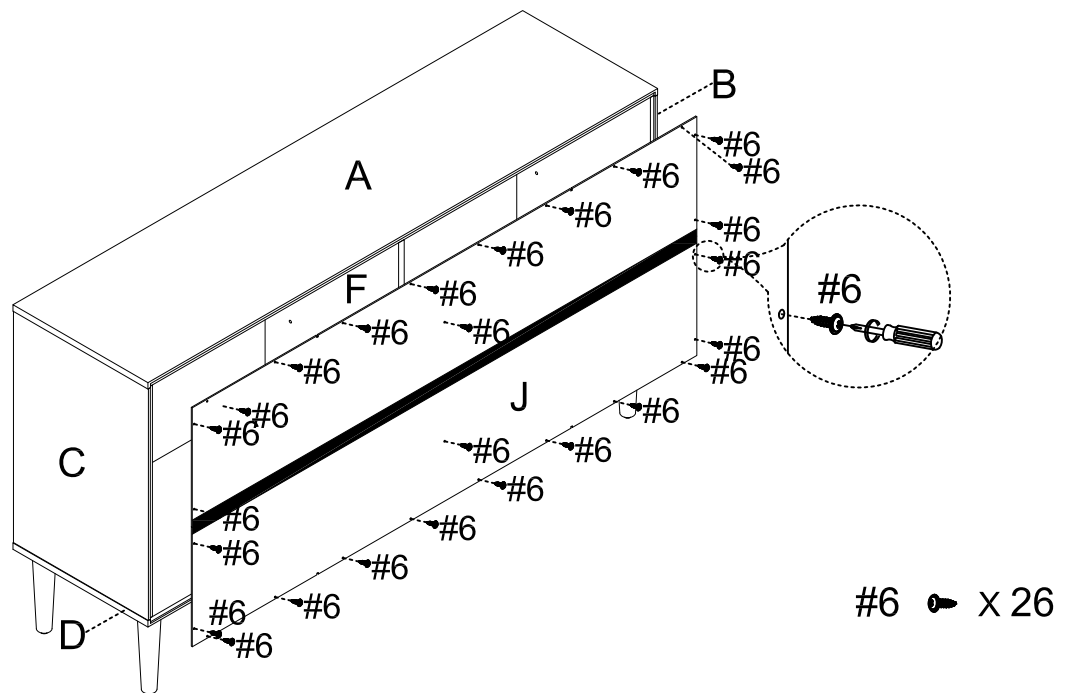

Step 6. Place shelf holders (part #5) into desired position and slide adjustable shelves (part E) into place.

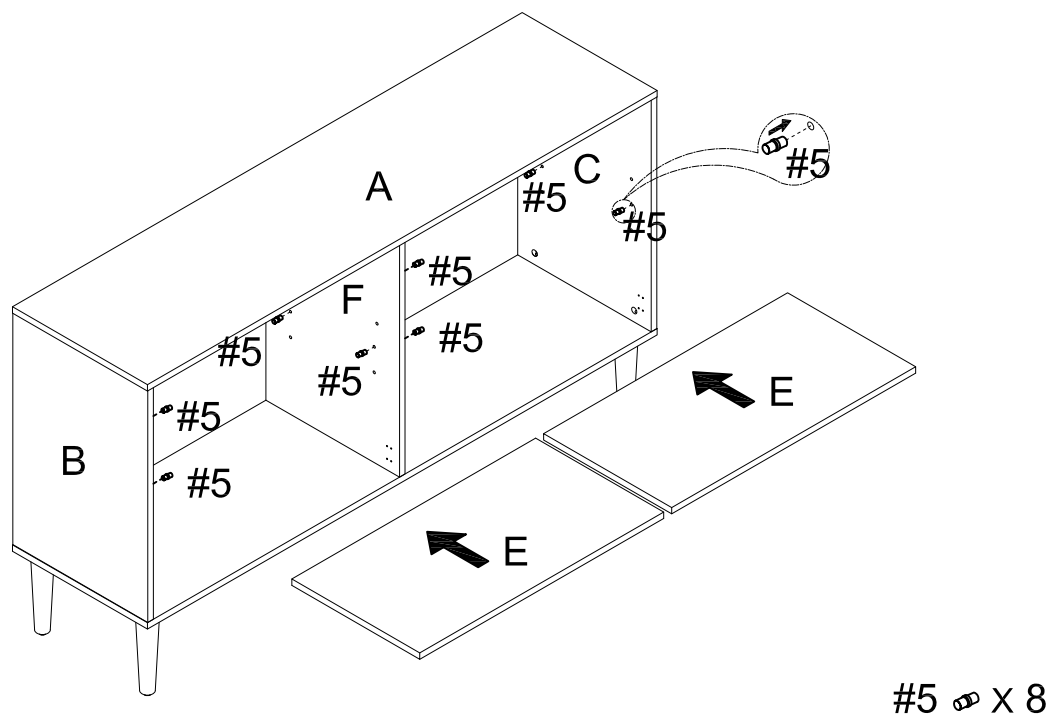


Step 7. Attach right door panels (part H) to panels (parts C & F) using screws (part #11) and phillips head screwdriver.

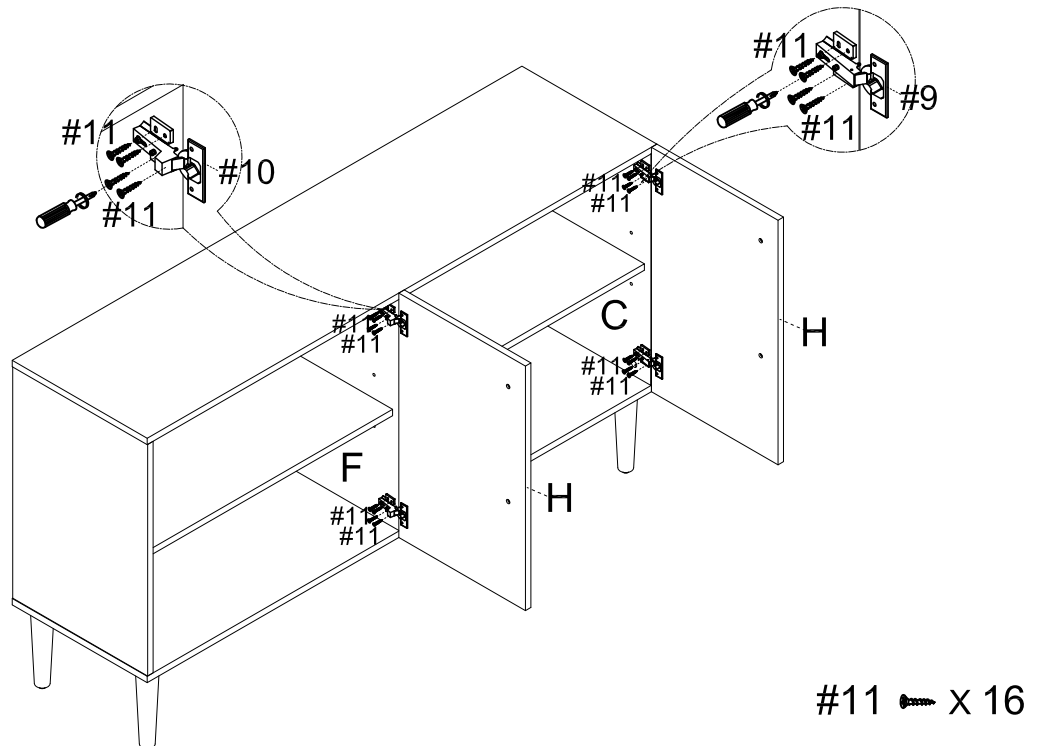

Step 8. Attach left door panels (part G) to panels (parts B & F) using screws (part #11) and phillips head screwdriver.

Note: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

Important: Safety strap kits (part #13) must be installed to prevent tipping, damage and/or injury.

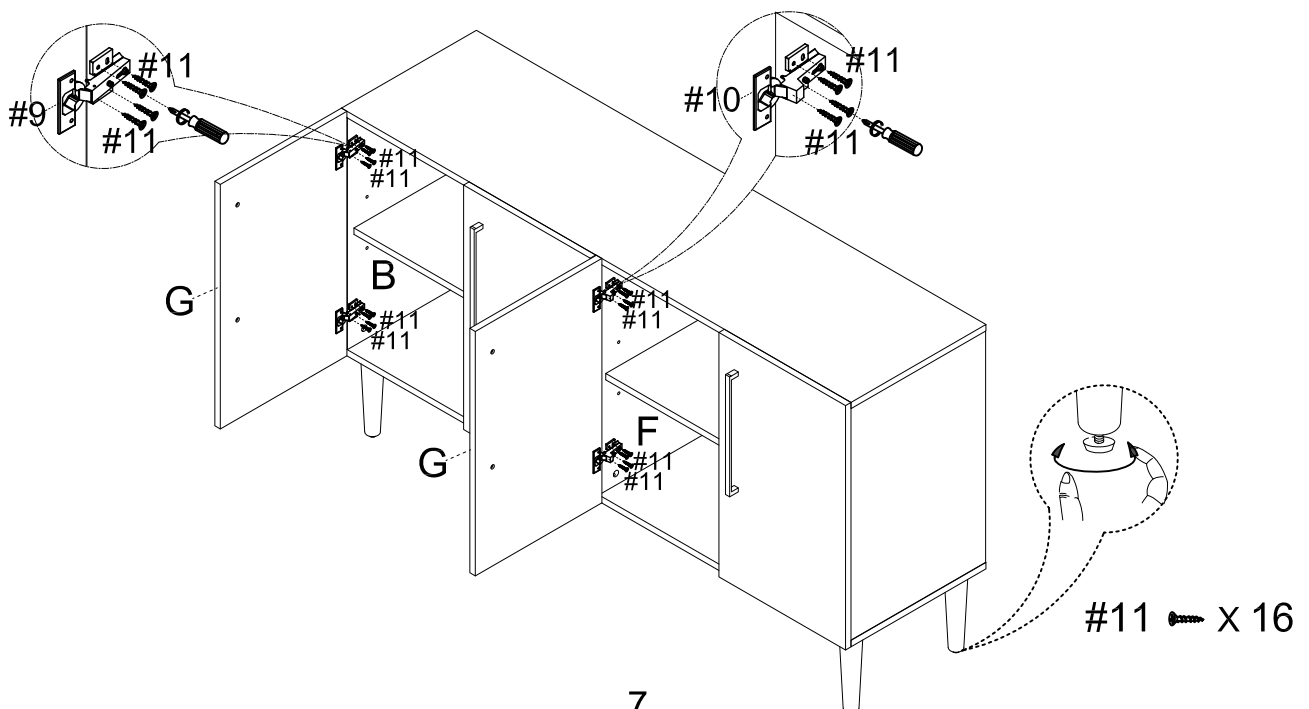


#13	A	B	C	D	E
					
Safety Strap Kit 2 SETS	Wall Anchor 2 PCS	Bracket 4 PCS	5/8"x ϕ 3xD8 Short Screw 2 PCS	1-1/2"x ϕ 4xD8 Long Screw 2 PCS	Safety Wall Strap 2 PCS

SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

1. Insert short screw (C) and safety wall strap (E) through bracket (B) and attach to top panel (part A) using phillips head screwdriver.
2. Drill a 11/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in top panel (part A) where bracket (B) is attached. Tap wall anchor (A) into the hole.
3. Insert long screw (D) and safety wall strap (E) through bracket (B) into wall anchor (A) using phillips head screwdriver.


Note: This item is not intended for clothing storage use.

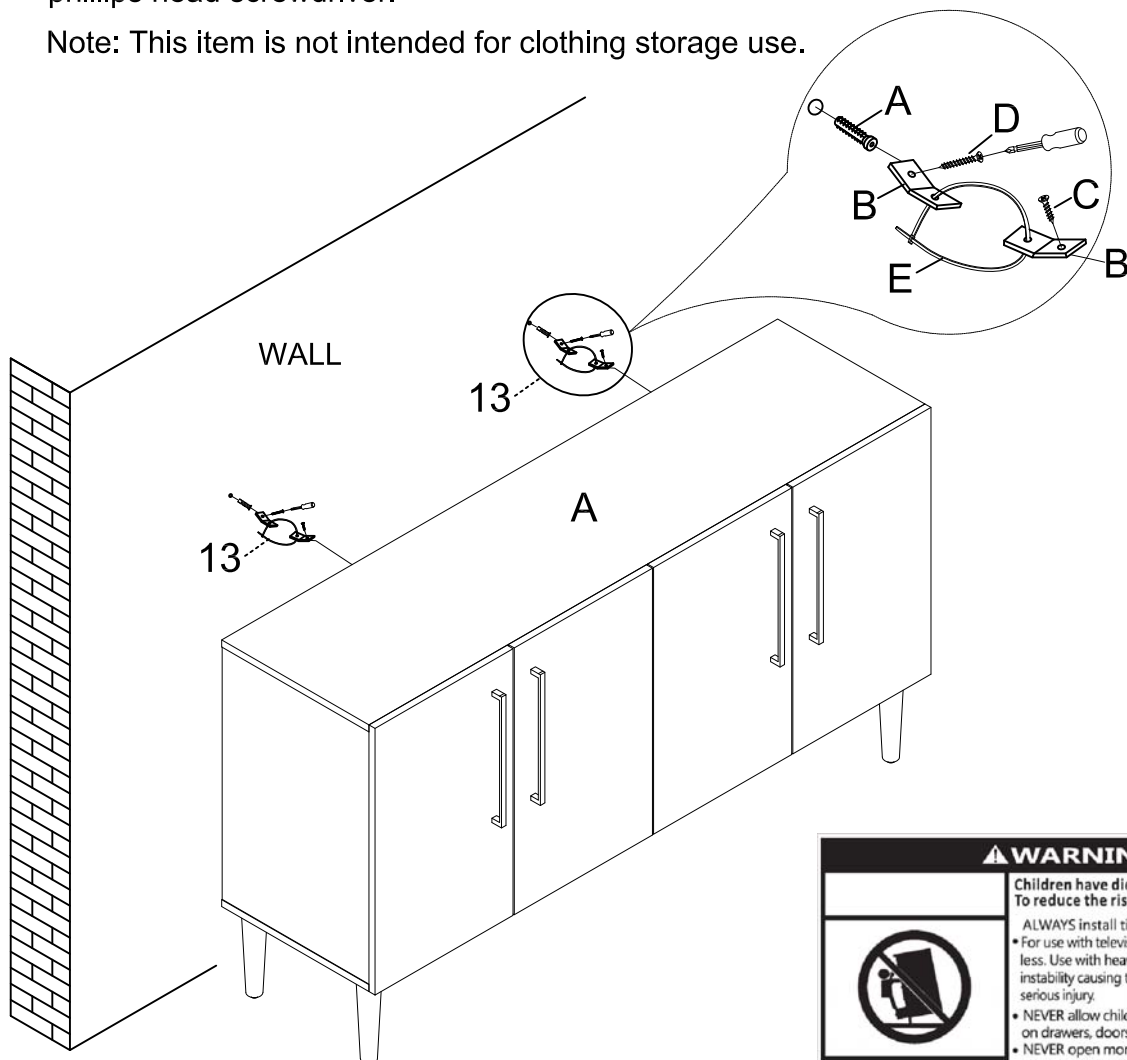

ADJUST YOUR DOORS TO MAKE THE GAPS MORE EVEN (OPTIONAL).


STEP 1

Open the door

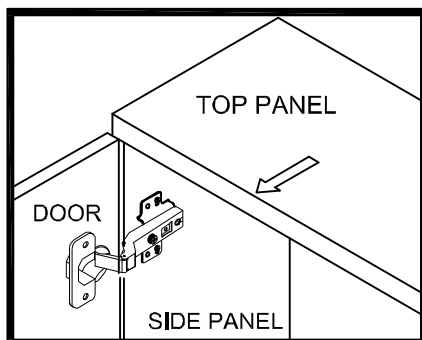


STEP 2

Adjust the gap between door panel and side panel

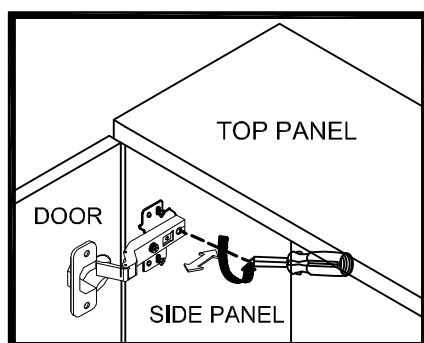


Loosen the screw indicated a little, adjust the hinge to right position (see step 2a & 2b), then tighten the screw.

STEP 2a MOVE DOOR IN

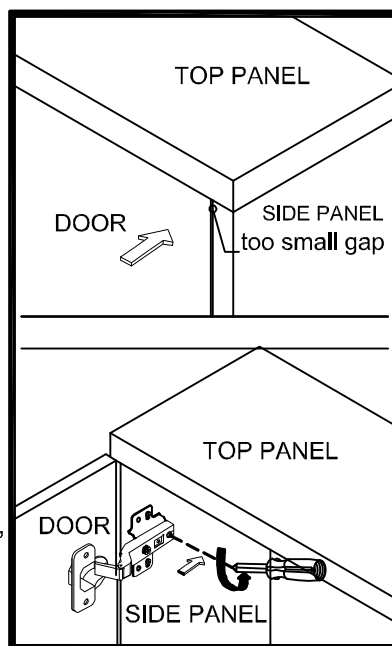

Push the hinge back a little.


STEP 2b MOVE DOOR OUT

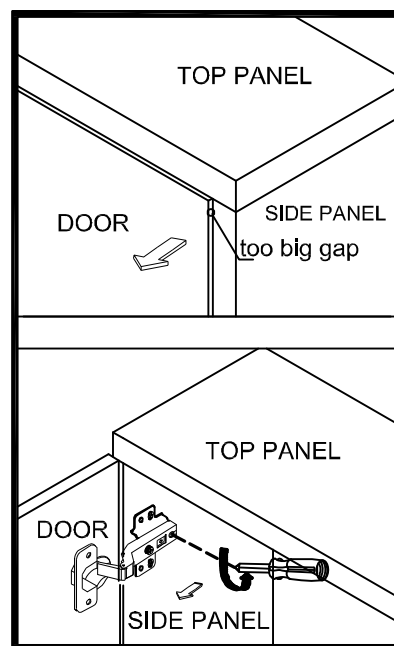

Pull the hinge forward a little.


STEP 3

To adjust the gap between two door

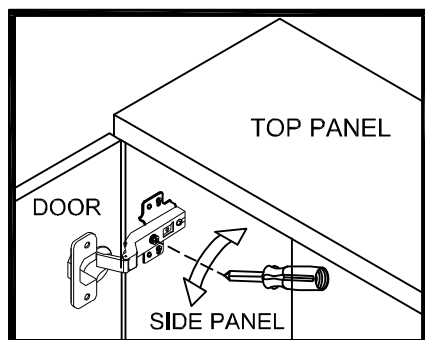


Loosen or tighten the screw indicated a little to adjust the gap between doors panels (see step 3a & step 3b)

STEP 3a MOVE DOOR RIGHT

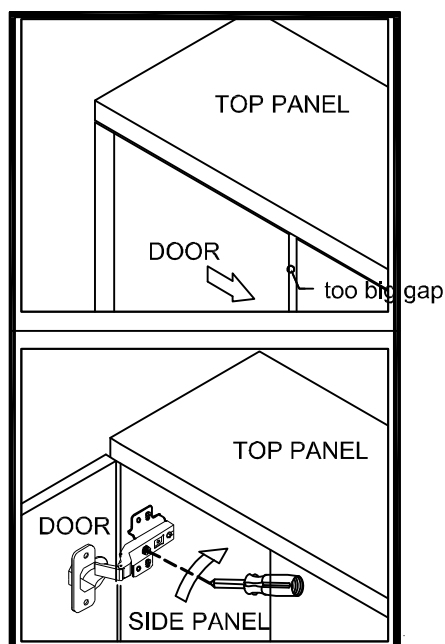

Turn the screw clockwise a little as shown to make the gap small.

STEP 3b MOVE DOOR LEFT

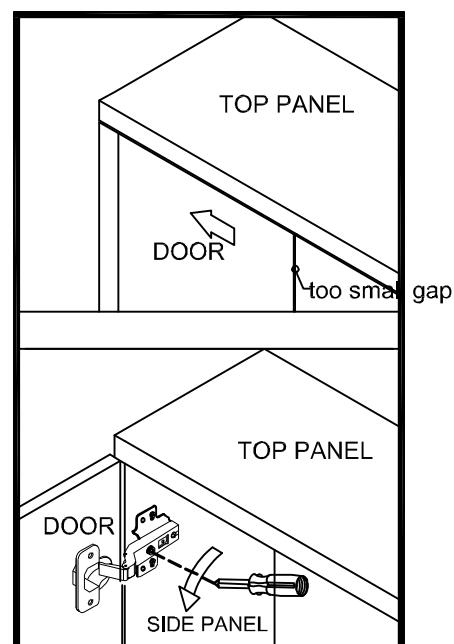

Turn the screw counterclockwise a little as shown to make the gap big.