

Item Number: 39611815

WARNING (To reduce the risk of fire, electric shock, or personal injury):

1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at a later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
 - » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the “**OFF**” position.
 - » Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all sides.
Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **27W** per bulb.
7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

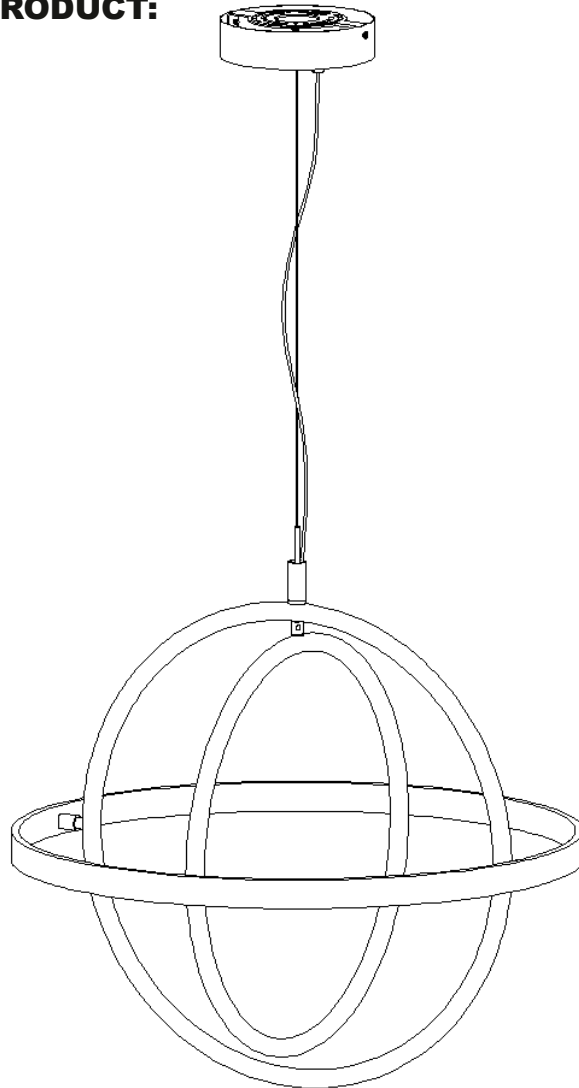

ORDERING PARTS






Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

CLEANING

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

TOOLS REQUIRED (NOT INCLUDED):

Before starting assembly and installation please prepare the needed tools as below picture

				
Ladder	Phillips head.flat blade screwdriver	Electrical tape	Pliers	Wire cutter/Stripper

PARTS TYPE & QTY INCLUDING:

- | | |
|----------------------------|----------------------|
| (C) Green ground screw (1) | (J) Steel wire (1) |
| (D) Mounting plate (1) | (K) Joint cover (1) |
| (E) Canopy (1) | (L) Tube (1) |
| (F) Stud (2) | (M) Joint (1) |
| (G) Lock nut (1) | (N) Upper ring (1) |
| (H) Strain relief (1) | (O) Lower ring (1) |
| (I) Cord (1) | (P) Fixture body (1) |

ACCESSORIES & QTY ENCLOSED:

- | | |
|--------------------------------|-------------------------|
| (A) Plastic wire connector (3) | (R) Smaller wrench (1) |
| (B) Mounting screw (2) | (S) Screw (2) |
| (Q) Bigger wrench (1) | Screw (1) (spare parts) |

ASSEMBLY & INSTALLATION INSTRUCTIONS:


1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

2. Turn off power


Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.

- » Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.
- » Place the wall switch in the "OFF" position.


3 » Unscrew studs (F) from canopy (E) then remove mounting plate (D).

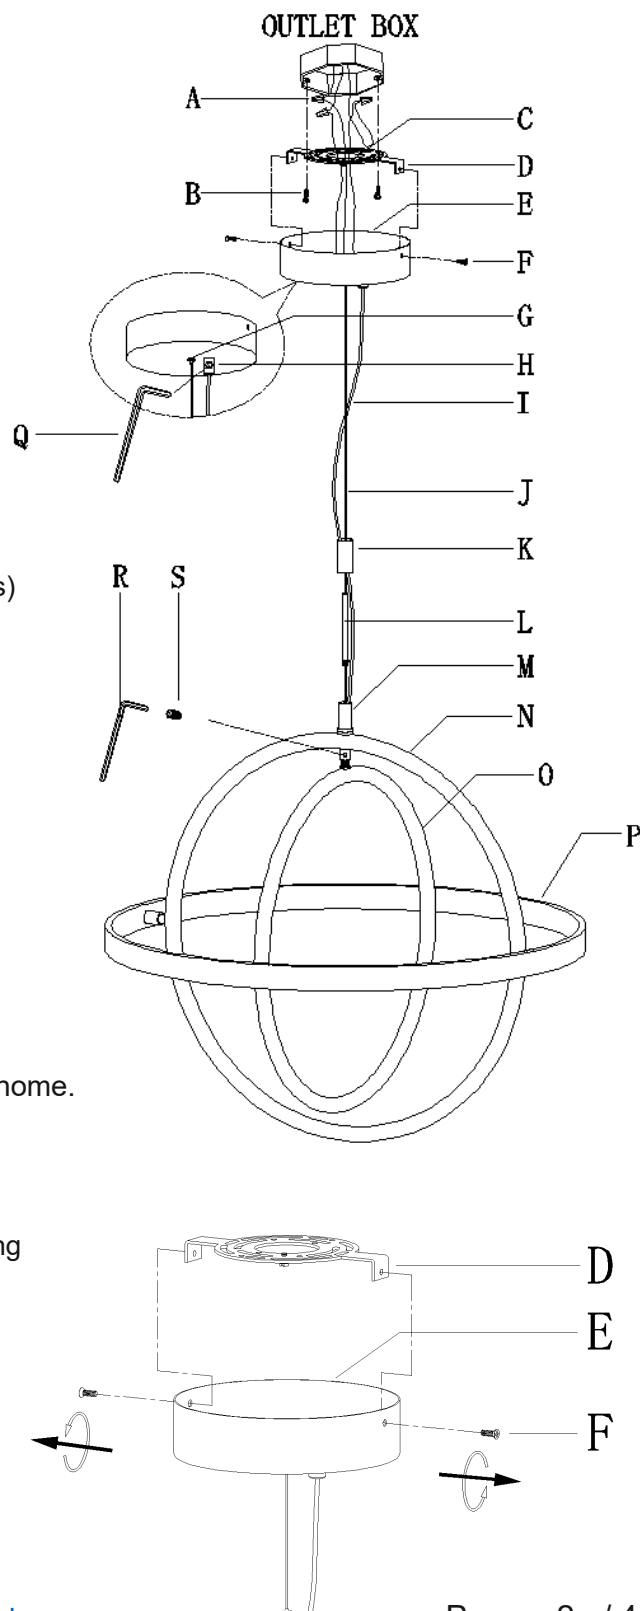

- 4 » 1) Insert lower ring (O) into the bottom of upper ring (N) and make sure they are closely attached.
- 2) Then thread two screws (S) into upper ring (N) and lower ring (O) using smaller wrench (R). Tighten till snug.

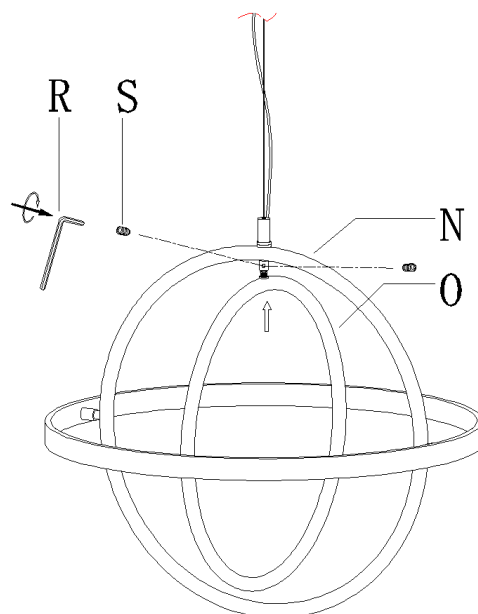


- 5 » 1) Carefully pass steel wire (J) through tube (L).
- 2) Carefully pass cable (I) and steel wire (J) through joint cover (K).
- 3) Screw tube (L) onto the top of joint (M), then insert and attach joint cover (K) to joint (M).

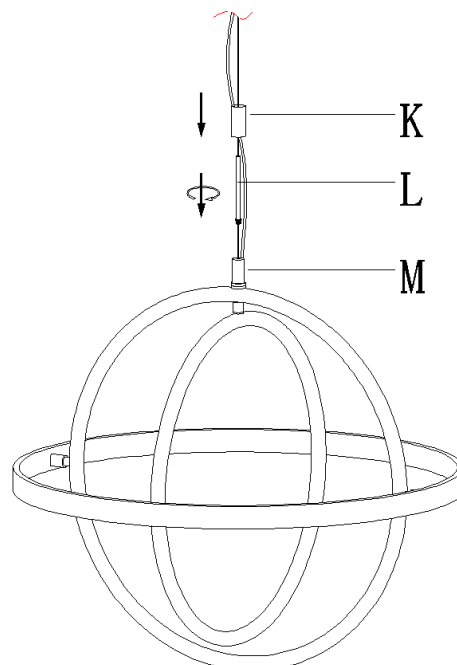

- 6 » Attach mounting plate (D) to the outlet box with mounting screws (B).


OUTLET BOX

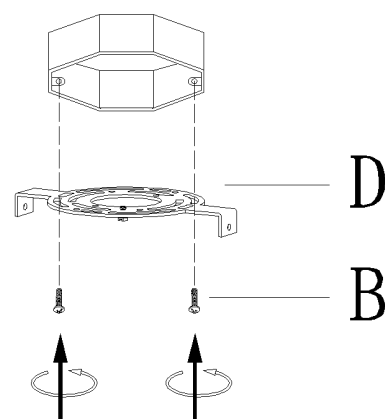

- 7 » Make wire connections

Connect wires as below wires connection shown. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**

Connect ground wires according to the below chart

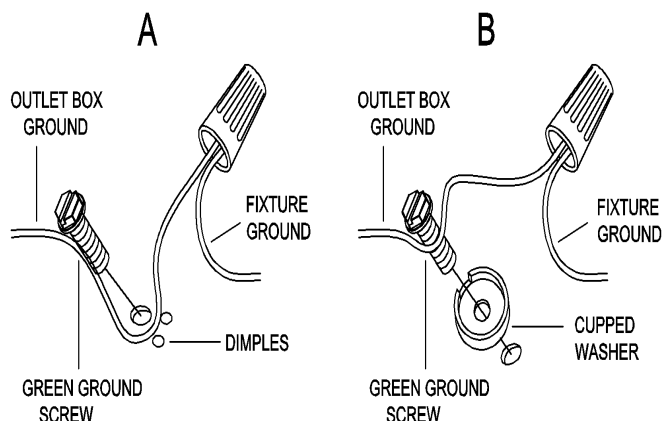


Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear,Brown,Gold or Black without tracer	Clear,Brown,Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Twist wires together with plastic wire connectors until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

- 8 » Raise canopy (E) to the ceiling and secure canopy (E) in place by threading studs (F) into mounting plate (D) and canopy (E).

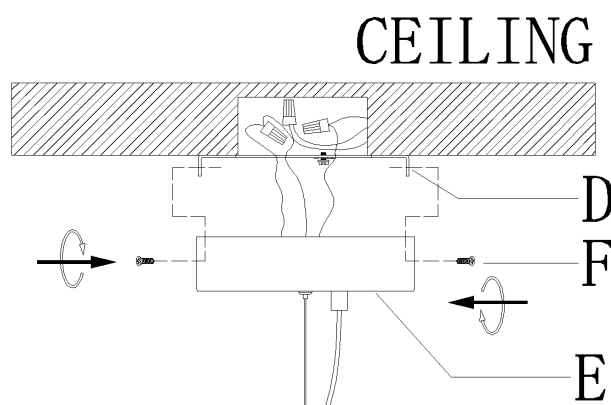

- 9 » 1) To adjust the hanging height of the fixture:


To adjust the length of steel wire (J):

- Press down and hold lock nut (G) by hand;
- Pull or push steel wire (J) in and out of canopy (E) to increase or decrease the hanging height.

To adjust the length of cable (I):

- Use bigger wrench (Q) to unscrew the screw in strain relief (H), carefully pull and push cord (I) through canopy (E) and strain relief (H) to lengthen or shorten the length of cord (I).
- Once the desired height of fixture is achieved, carefully tighten the screw till snug.

- 2) Adjust lower ring (O) and fixture body (P) to the proper position.

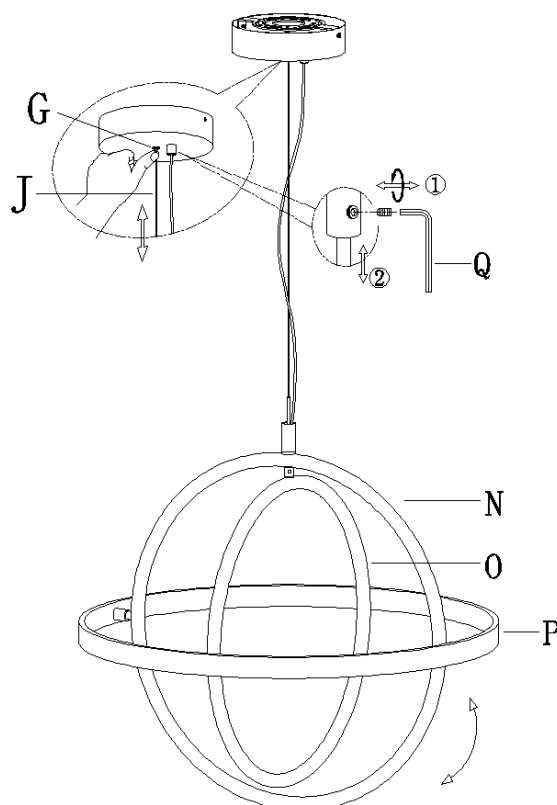

10. Check everything is already installed properly, then you could turn on the light. Enjoy!