
Let's build the

Jackson Side Table

SKU 34101





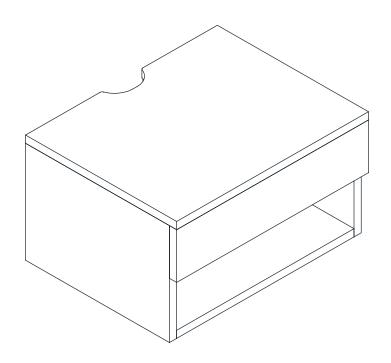



Ok, let's get rolling

This should be easy, just follow our instructions and you will be back to Netflix in no time.

Estimated time for assembly



70:00

What you need

- Some of your favourite bubbly or your preferred relaxant
- Use the packaging carton as a working surface to prevent product damage during assembly
- Phillips head screwdriver
- Drill
- 1/4" Drill bit or 5/16" drill bit

Weight Limitation



33 lbs for top 11 lbs for drawer

Toll-free at 1-866-619-1004 Help@nathanjames.com Nathanjames.com/help


What's included

	Description	Qty
1	Top Panel	1
2	Left Side Panel	1
3	Right Side Panel	1
4	Bottom Panel	1
5	Drawer Bottom	1
6	Back Panel	1
7	French Cleat for Cabinet	2
8	French Cleat for Wall	2
9	Drawer Front	1
10	Drawer Left Side	1
11	Drawer Right Side	1
12	Drawer Back	1





The goods

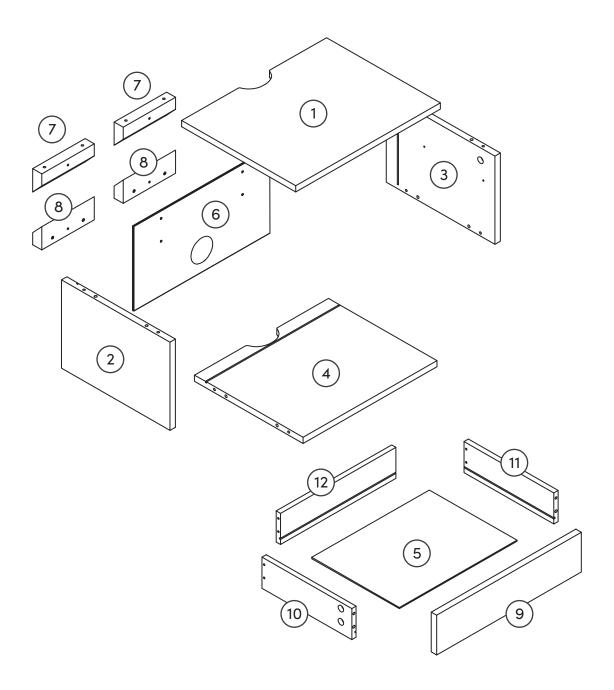


IMPORTANT

- 1. Do not tighten bolts / screws completely until all bolts / screws are lined up and inserted into holes.
- 2. Please use hand tools for assembly. Do not over tighten screws and bolts to avoid stripping.


What's included


	Description	Qty
Α	M6*35mm Cam Bolt	16
В	15x9.5mm Cam Lock	16
С	M6*30mm Wooden Dowel	8
D	M4*30mm Screw	8
Е	M3*12mm Screw	8
F	Left Side Panel Slider (CL)	1
F	Right Side Panel Slider (CR)	1
F	Right Side Drawer Slider (DR)	1
F	Left Side Drawer Slider (DL)	1
G	M4*50mm Screw (for Non-Drywall anchor)	4
Н	M6*30mm Anchor for Non-Drywall	4
ı	Drywall Anchor	4
J	M4*70mm Screw (for drywall anchor)	4
K	PVC Sticker	4
L	Mounting Installation Template	1

The goods

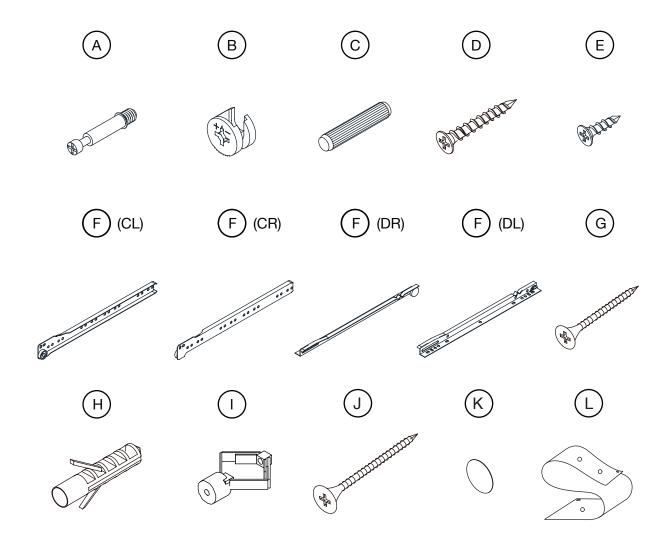

Let's get this thing fired up! Lay down packaging carton or use carpet as a working surface. We apologize in advance for how sore your hands might get after these instructions. But, it'll be worth it!

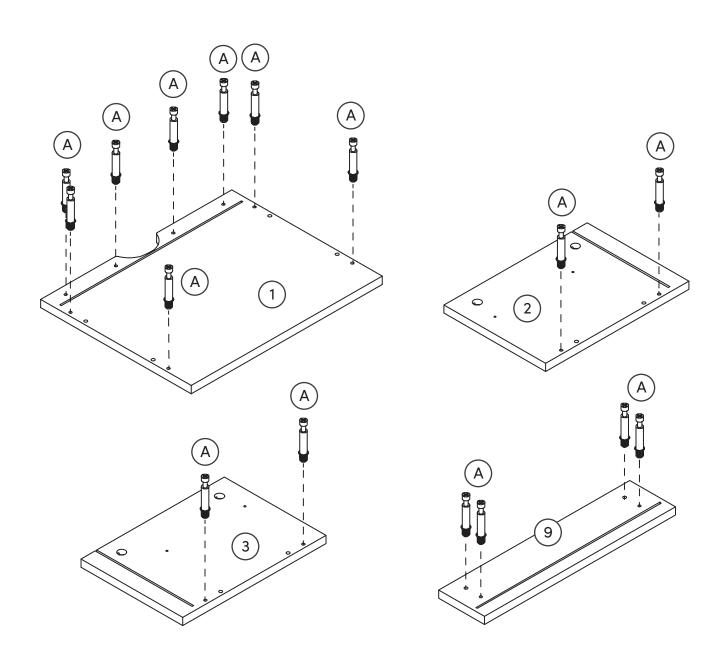


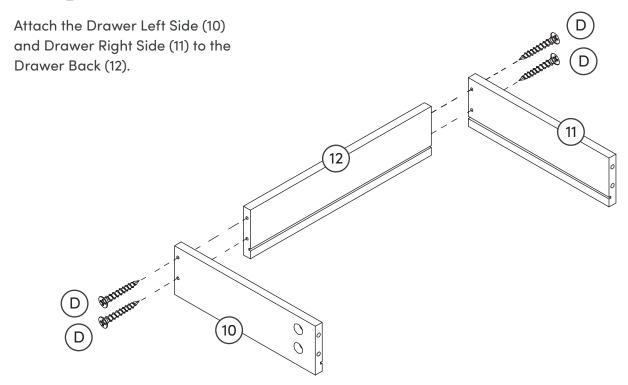


Step 3

To finish up the drawer, slide in the Drawer Bottom (5). Then attach the Drawer Front (9) using the 15*9.5mm Cam Locks (B) to secure in place.

See the following page for instructions on how to use cam locks.

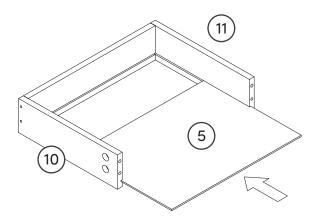

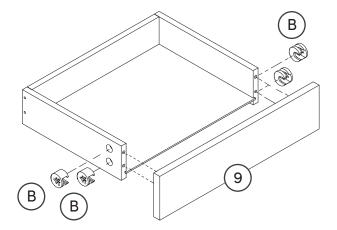


How to use cam locks

Did you know?

Cam locks are used to join two panels together, usually the edge of one to the flat side of another.


First, your cam bolt (or cam pin) will need to be properly inserted into the flat side of the board.

Important Note: Only tighten the cam bolt until it is secure. Do not over-tighten.

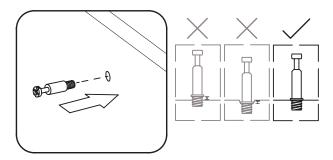


Next, you will fit the proper hole on the edge of the associated joining panel over the cam bolt.

Important Note: When installed properly, the head of the cam bolt will be visible through the larger hole on the side of the joining panel.

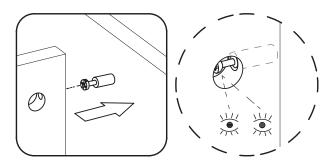


Next, you will notice the cam lock has a "C" shaped back. Commonly, an arrow on the front of the cam lock points in the same direction as the open section on back.

Using these as your cue, insert the cam lock into the large hole so the opening of the "C" fits over the head of the cam bolt.

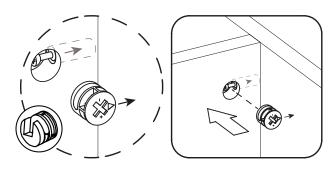

Using a screwdriver, you will turn the cam lock until it stops, usually between 130° or 180°. You will feel the panels pulling closer until they are secured.

Important Note: Only turn the cam lock until the panels are fully engaged & feel secure. Turning too far may lead to hardware failure.

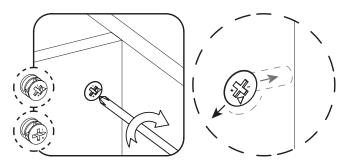


Still having issues?


If a cam lock seems to be spinning in place or is not "catching" or pulling the panels together as expected, first remove the cam lock & try again while making sure that everything is properly positoned & oriented.


If you are still having issues getting things working as expected, first remove the cam lock then unscrew the cam bolt slightly (less than 1 complete turn) to see if that helps with the alignment of the cam lock & bolt .

Get those Drawer Sliders out and let's finish this drawer! Tip from a friend to a friend: pay careful attention that your sliders are on the correct way – look for the DR and DL markers!

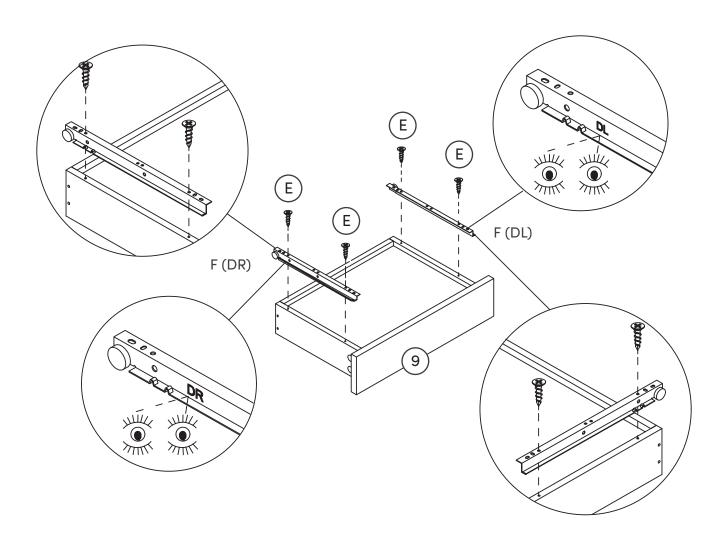


This graphic looks intense, but trust us, it's easy! Secure the Left Side Panel Slider F(CL) and Right Side Panel Slider F(CR) to the (you guessed it!) Left and Right Side Panels.

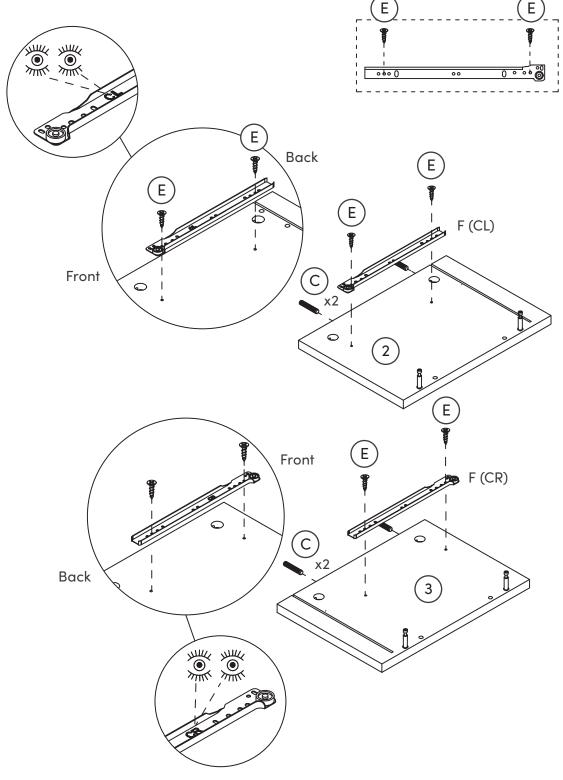


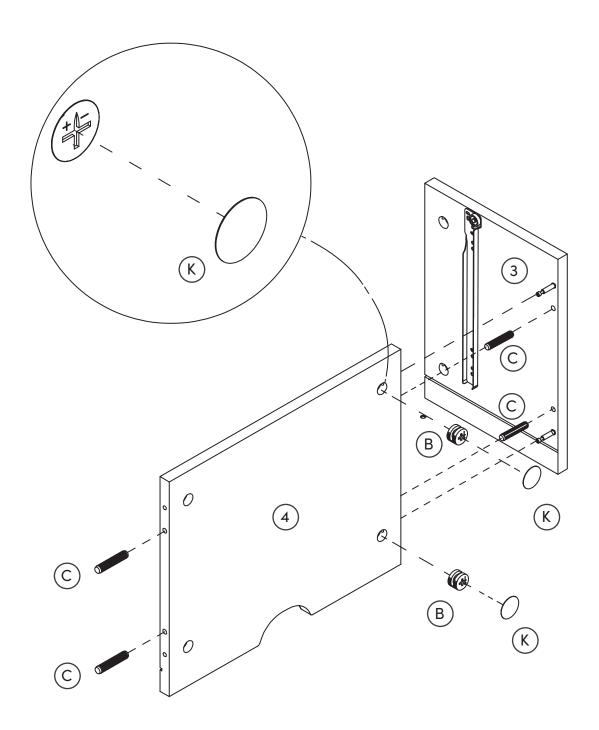


Attach the Left Side Panel (2) and continue placing the PVC Stickers (K) over the Cam Locks (B).

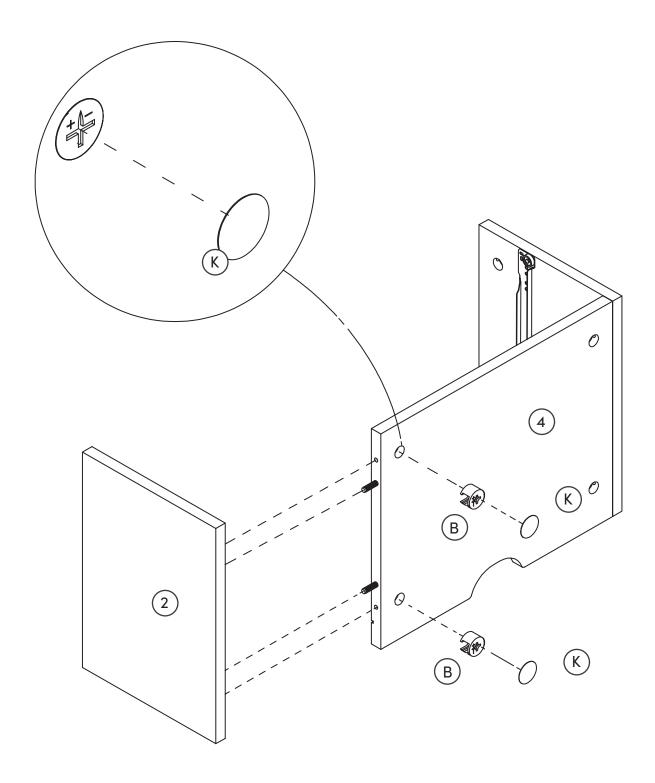


Slide on the Back Panel (6).

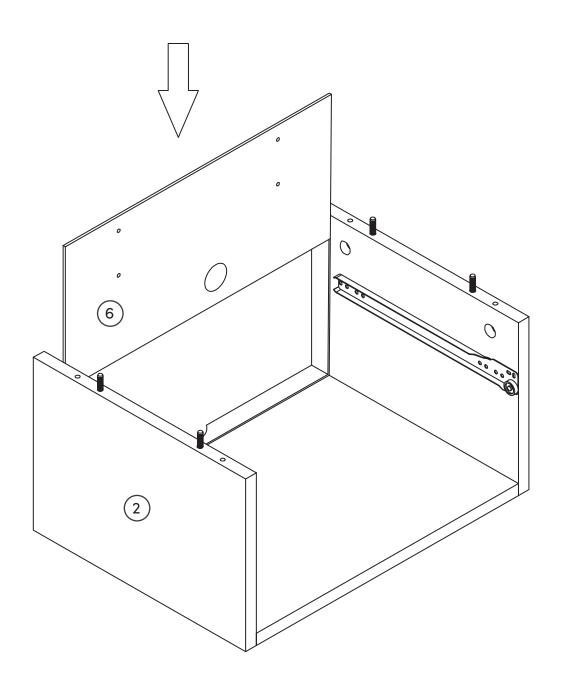


Secure the Top Panel (1).

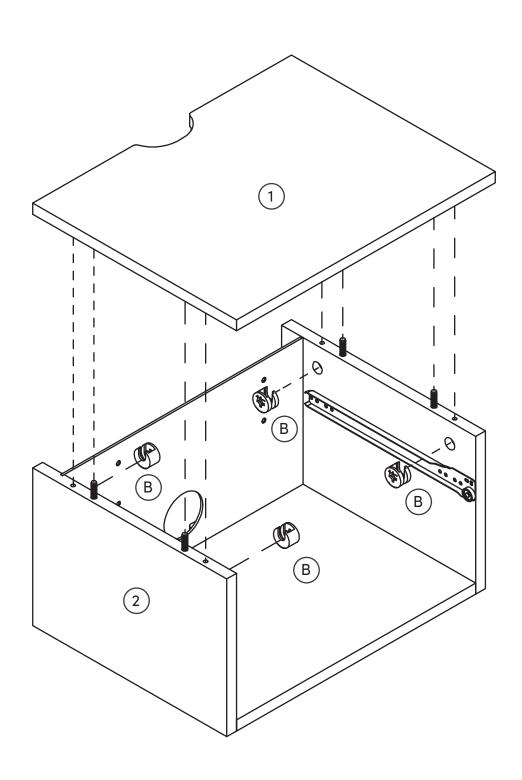

Turn the unit around and secure the French Cleat for Cabinet (7) pieces by lining up the Cam Bolts and Cam Locks and tightening.

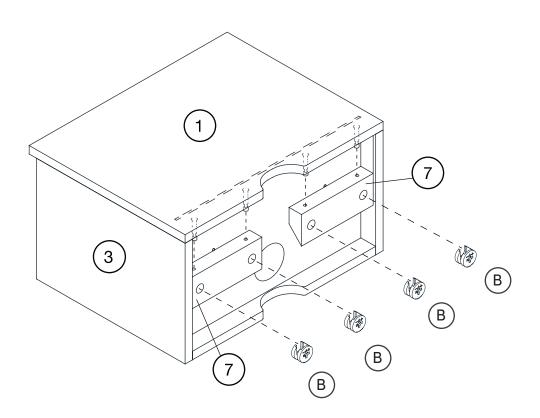

Secure the Back Panel (6) to the French Cleats for Cabinet (7) using two M4*30mm Screws (D).

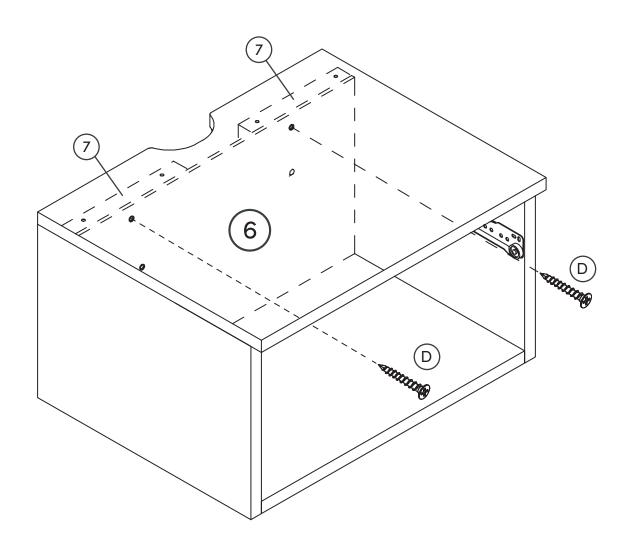


Step 12: Using the Mounting Installation Template

Unroll it

Unroll the paper Mounting Installation Template (L) and remove the adhesive backing at the corners.


Place it

Locate where you would like to mount the side table and apply the Mounting Installation Template (L) to the wall in that location. Make sure the template and holes are level.

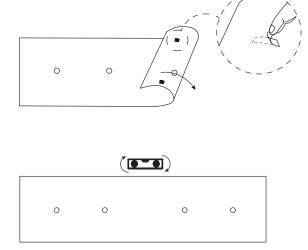

Mark it

Using the holes in the template and the metal rail as a guide, mark the location of each hole on your wall. These will become your guides as to where to drill holes for the wall anchors.

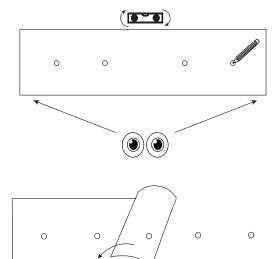

Remove it


Slowly remove the paper, ensuring that all holes have been marked.

Drill it


Drill each hole to the suggested size.

Important Note:

Non-drywall = $\frac{1}{4}$ " drill bit Drywall = $\frac{5}{16}$ " drill bit




Step 13: Non-drywall

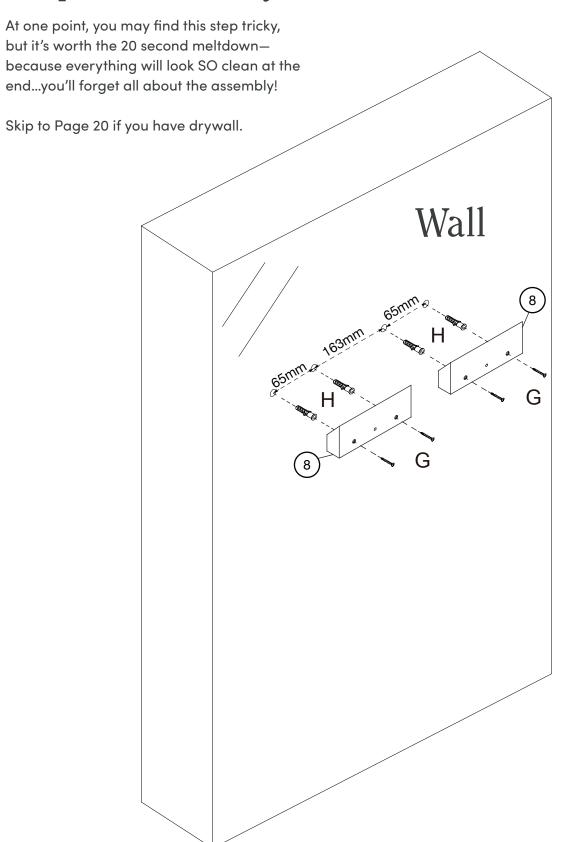

Step 13 (cont.) Non-drywall application

Mark it

Choose your desired location on the wall and use a pencil to mark where the anchors will go.

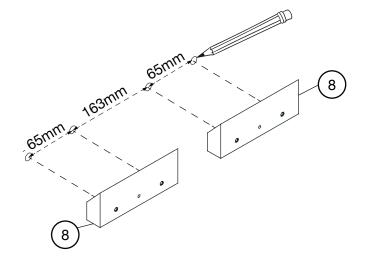

1/4" Drill bit


Following the marks you just made, with a 1/4" drill bit, drill 4 holes into the wall.




Insert the anchors

Go ahead and tap the wall anchors into place in the new holes that you just drilled.

If you're feeling strong, just go ahead and push it in.




Step 13: Drywall

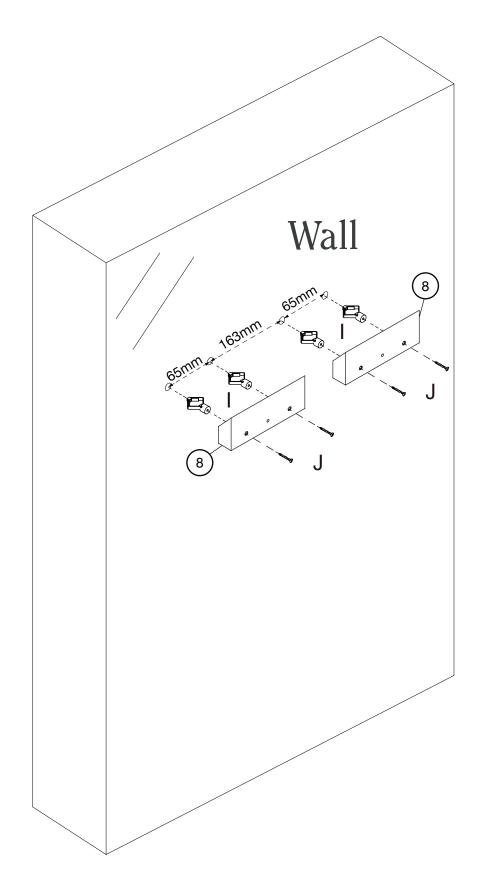

Step 13 (cont.) Drywall application

Mark it

Choose your desired location on the wall and use a pencil to mark where the anchors will go.

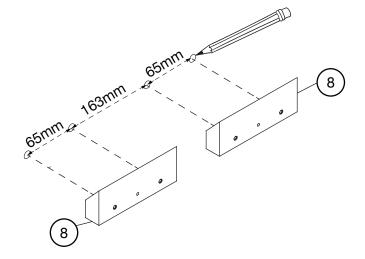

5/16" Drill bit


Following the marks you just made, with a 5/16" drill bit, drill 4 holes into the wall.




Insert the anchors


Go ahead and tap the wall anchors into place in the new holes that you just drilled.

If you're feeling strong, just go ahead and push it in.




Step 13 (cont.) How to use drywall anchors

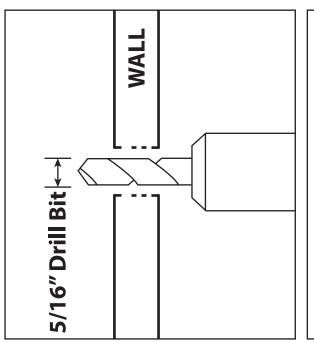

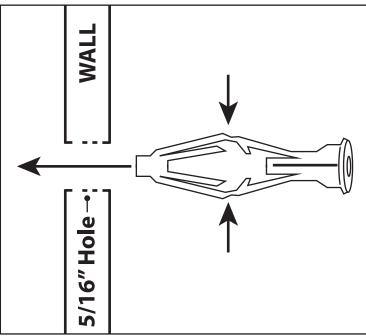


1. Drill hole with 5/16" bit

2. Pinch and insert

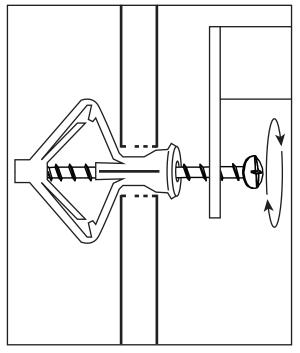

3. Begin tightening

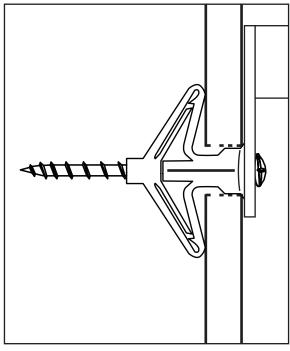

4. Tighten to 100%

Now that the wall is prepped, line up the French Cleat for the Cabinet with the French Cleat for the Wall and set your floating shelf on the wall. Wall

Before you start placing your chips and salsa on the tabletop, please finish securing the table to the wall using the M4*30mm Screws (D). Wall D

This may be our favorite step of all (because it's the last step!).

Line up the drawer sliders and carefully push your drawer in.

Okay, now you can place your chips and salsa on top!

No heartburn, when we handle the return

Give us a call **1-866-619-1004** or shoot us a message at **help@nathanjames.com** we will issue you a free replacement with **zero hassle**.

Our way		Their way	
69	Give us a call		Re-package item
X	Replacement		Schedule pick up
<u></u>	You		Track package
		X	Replacement
			You

We really don't want you to go through the hassle of re-packaging your item and sending it back, because let's be honest...nobody has time for that.

Safety first, fun later

We want your Jackson Side Table to last as long as possible, so we recommend that you tighten the screws 2 weeks after assembly and for added safety check the tightness of all screws every 2 months.

DO NOT

For proper care and treatment of wood please check our website at Nathanjames.com/products

Safe use of this product starts with you.

Use this side table responsibly with the primary concern for your safety. Follow assembly instructions carefully and inspect product upon receipt and each use.

Nathan James and its parent companies cannot be held legally responsible for any injuries or death resulted from failure to follow instructions or improper use of this product.

Do not modify the structure of this product in any way.

Our products have been tested to meet specific safety measures as they were originally intended to be sold. Any modifications will present the risk of creating significant safety issues which NJ will not be responsible for.

Proper use

DO NOT	climb on side table
DO NOT	exceed weight limit
DO NOT	leave spilled liquid on side table
DO NOT	use if table is damaged or broker
DO NOT	make temporary repairs
DO NOT	use outdoors

use for commercial purposes

We are only in business if you're happy

For starters, thanks for being you.

▼ Toll-free at 1-866-619-1004

Mathanlames.com/help

We do our best to ensure your furniture arrives without any problems, but occasionally mistakes happen—as humans we are imperfect beings. In the event that a part is damaged or missing, we will be more than happy to provide you with replacement part(s) for free.

Warranty

This product comes with a lifetime warranty from the date of purchase. Please use your phone to scan the QR code to register your product or visit https://goo.gl/i9dk3q



Did we do alright? Please spread the love!

If you are happy with your product, tell your friends and family about us or even better leave us a review online. Spreading the word gives us the opportunity to make more people happy and keep our prices low for your next purchase.

Founder, Nathan James