



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



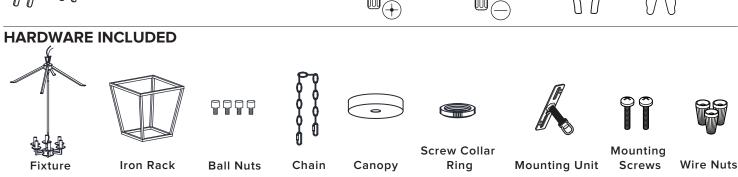


*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


INSTALLATION

STEP 1

Attach the iron rack onto fixture using ball nuts.

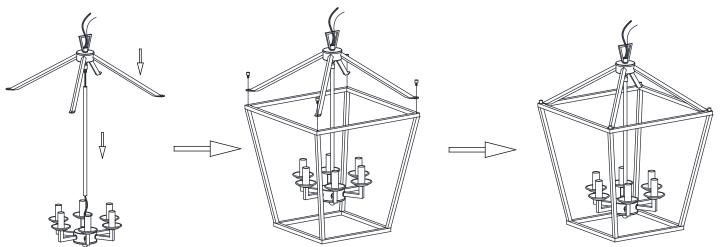


STEP 2



STEP 3


Use the $\mbox{\it mounting screws}$ to attach the $\mbox{\it mounting unit}$ to the junction box



INSTALLATION

STEP 4

Pass the **chain** and the branchwires through the **screw collar ring** and **canopy**. Feed the branchwires through the pipe nipple on the **mounting unit** and attach the end of the **chain** to the **mounting unit**.

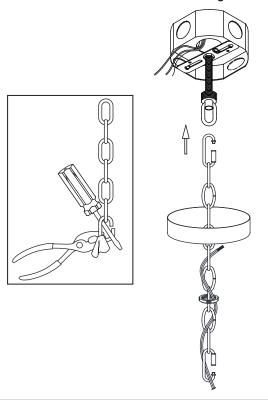

STEP 5


Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:


White Supply Wire or Insulated Wire (other than green) with silver conductor



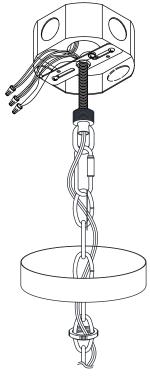

STEP 6

Secure the canopy to the mounting unit with the screw collar ring.

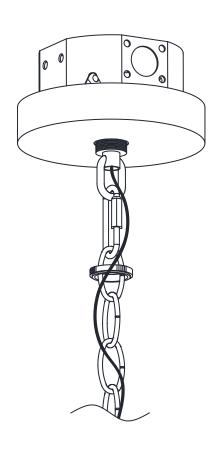

STEP 7

Install bulbs (not included)

