



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

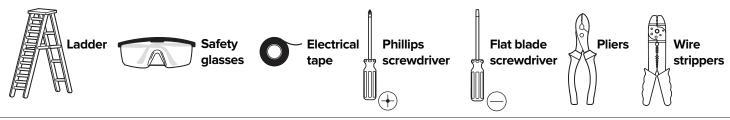

HARDWARE INCLUDED

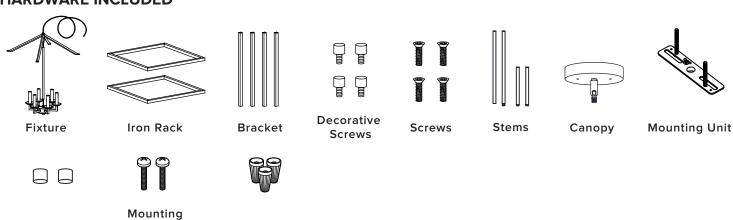

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


INSTALLATION

Ball Nuts

STEP 1

Attach the iron rack and brackt onto fixture using decorative screws and screws.


Screws

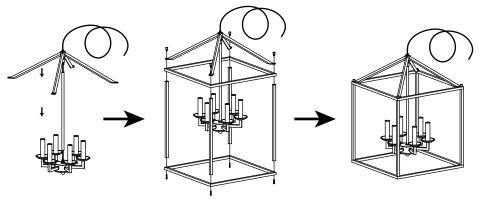

Wire Nuts


STEP 2

Unscrew the **ball nuts** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box.



STEP 3

Install **stems** based on the desired length of the item, adding **canopy** once finished.

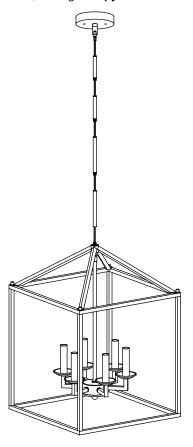

INSTALLATION

STEP 4


Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture


White Supply Wire or Insulated Wire (other than green) with silver conductor



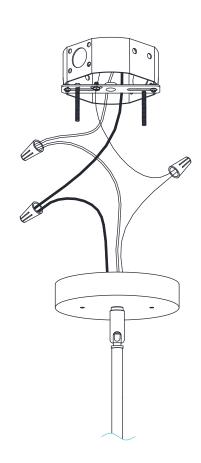

STEP 5

Secure the **canopy** to the **mounting unit** with the **ball nuts**.

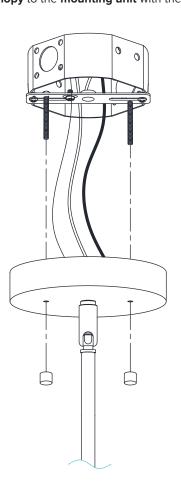

STEP 6

Install bulbs (not included)

