


SOLEA[®]

INSTALLATION INSTRUCTIONS FARMHOUSE KITCHEN SINK

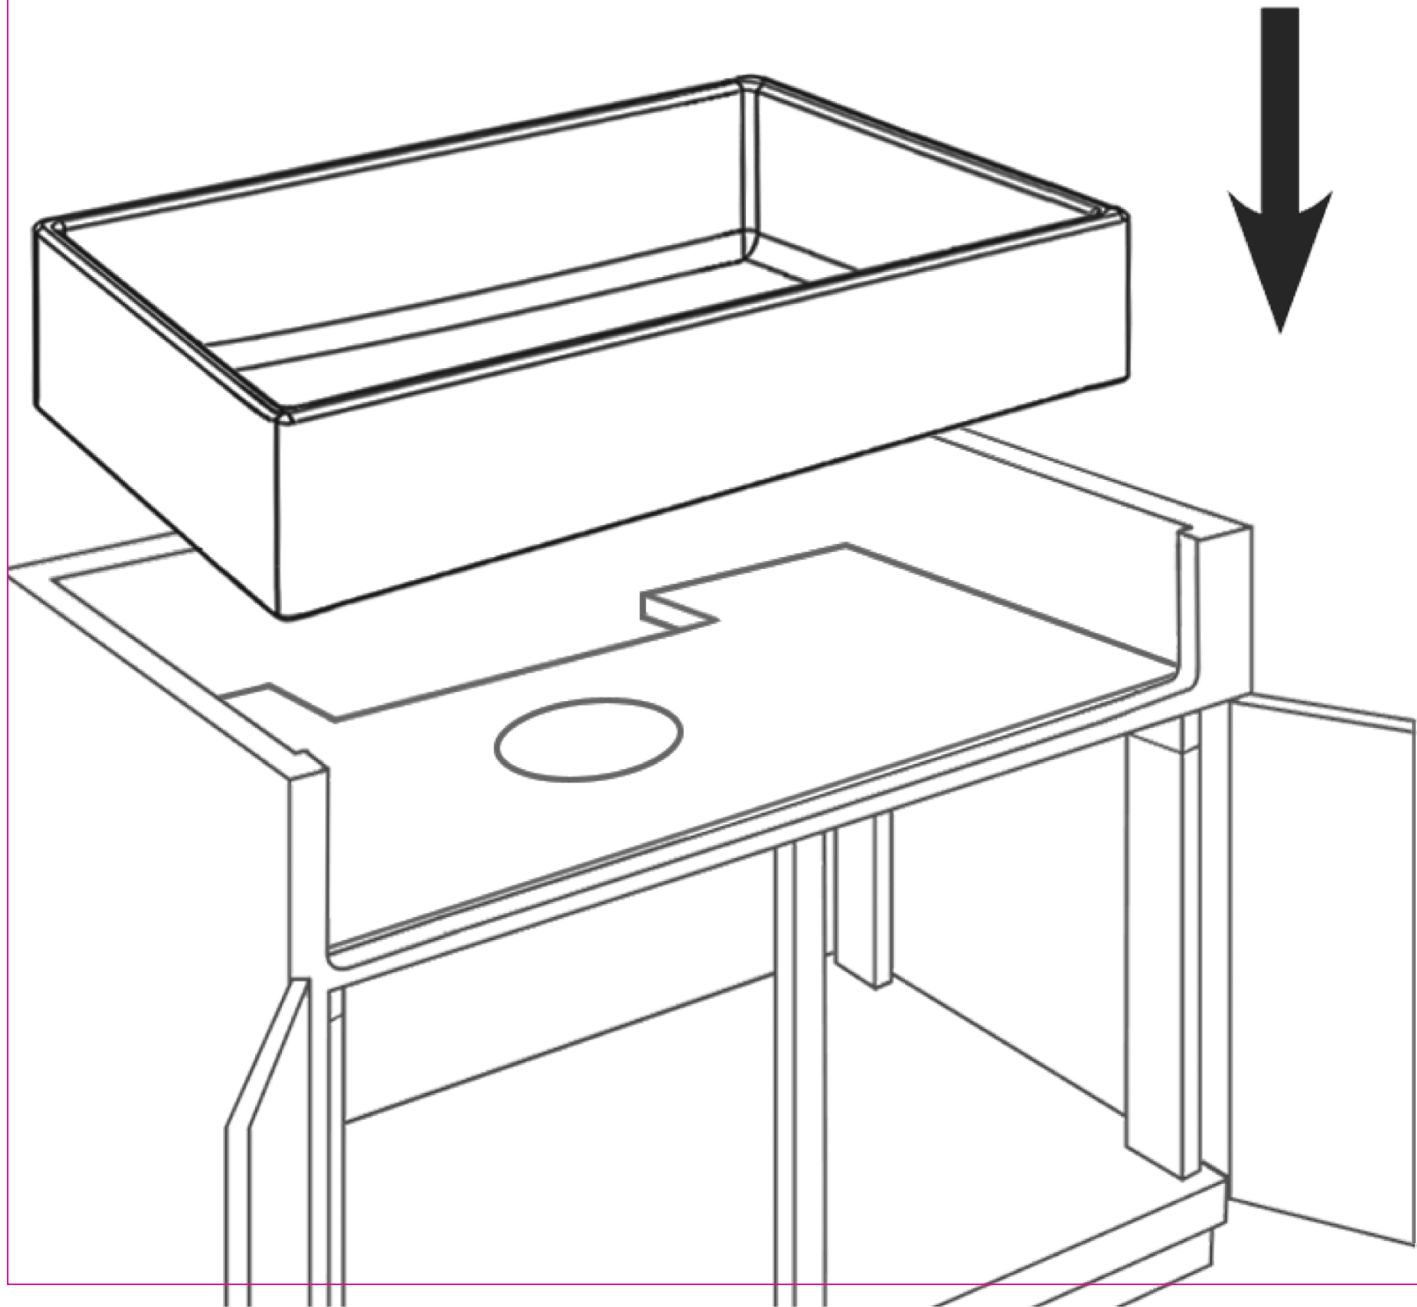

**CAUTION:**

Risk of personal injury or product damage. Handle with care.
Product can break, chip, cause injury or product damage.

IMPORTANT INFORMATION


- Read these instructions carefully before you begin this installation.
- Observe all applicable local plumbing and building codes.
- Solea Sinks recommends all sinks are installed by experienced and professional installers. To ensure safety and damage-free installation, this sink should be installed by two people. Solea Sinks reserves the right to revise the design of products without notice.

BEFORE YOU BEGIN

- Before installation, inspect the sink for damage. Solea Sinks is not responsible for sink damage or any other damage during the installation.
- A custom counter top, sink base cabinet and support framing is required for proper installation. Fireclay sinks should only be installed with a solid surface countertop
- The cabinet must be installed, secured, plumb, and level. The front sink apron must be secured to the front of the cabinet by attaching fasteners through the cabinet front and into the support framing. Failure of this step can lead to product damage.
- Ensure the support frame fasteners are long enough to secure the support framing but short enough not to go through the walls of adjacent cabinets.
- Due to the dimensional variation from the fireclay manufacturing process, Solea Sinks does not offer the cutout template for fireclay sinks. Solea Sinks recommends providing the actual sink to the cabinet maker or any other contractor involved in the project. It is critical that the carpenter, tiler, and plumber coordinate the requirements of the project. Solea Sinks is not responsible for improper installations.
- Shut off the hot and cold water supplies. Inspect the drain, supply tubing, and faucets. Replace if necessary.
- Due to the variety of installations possible with this sink, you may use procedures other than those described in these instructions.



RECOMMENDED TOOLS

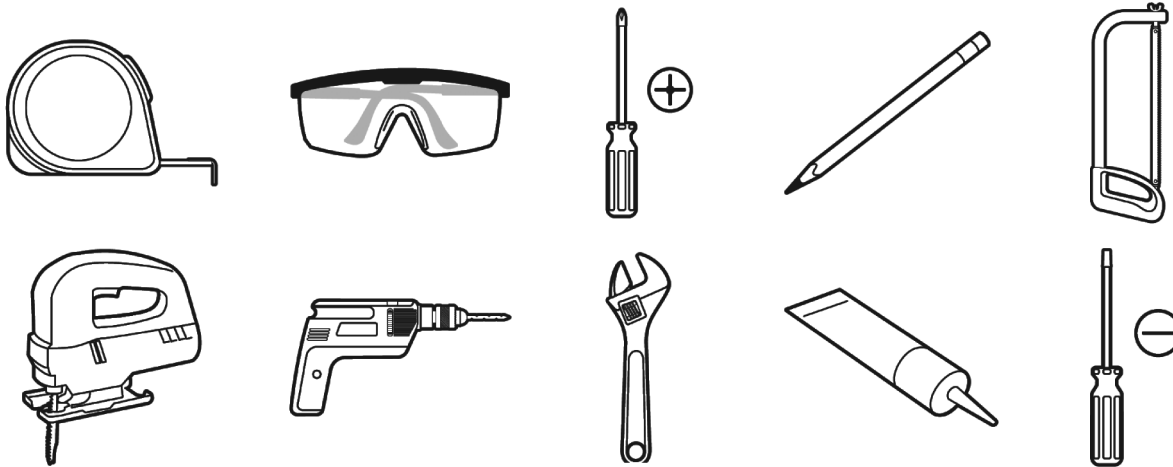

Painter's Tape

Level

Framing Square | Shims or Cabinet Fillers | Clamps


Construction Adhesive Sealant

(stone, marble, and granite silicone caulk are recommended)

Support Framing Material (1 1/4 inch (32mm) Max Thickness)

FIRECLAY SINK INSTALLATION INSTRUCTIONS


STEP 1 BASE CABINET PREPARATION

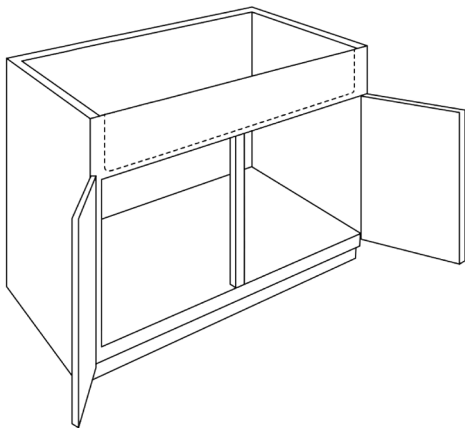

- Measure the size of the sink, including the front apron. Cut the face of the cabinet to allow the sink to slide in.
- Use painter's tape for marking and cutting purpose to protect the cabinet and sink from damage.

IMPORTANT: Due to the dimensional variation from the fireclay manufacturing process, Solea Sinks does not offer the cutout template for fireclay sinks. It is essential that prior to installation, you discuss with your installer and agree on the final appearance. Cabinet should NOT be cut or fabricated without the sink.


STEP 2: COUNTERTOP PREPARATION

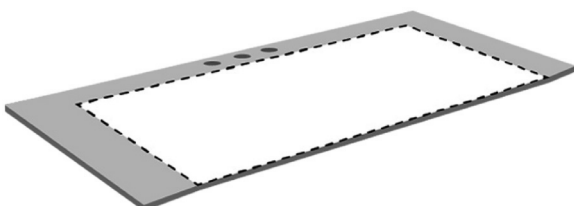

- Measure the size of the sink, including the front apron. Cut the counter top to allow the sink to slide in.


SOLEA[®]

STEP 3: CABINET/SUPPORT FRAME CONSTRUCTION

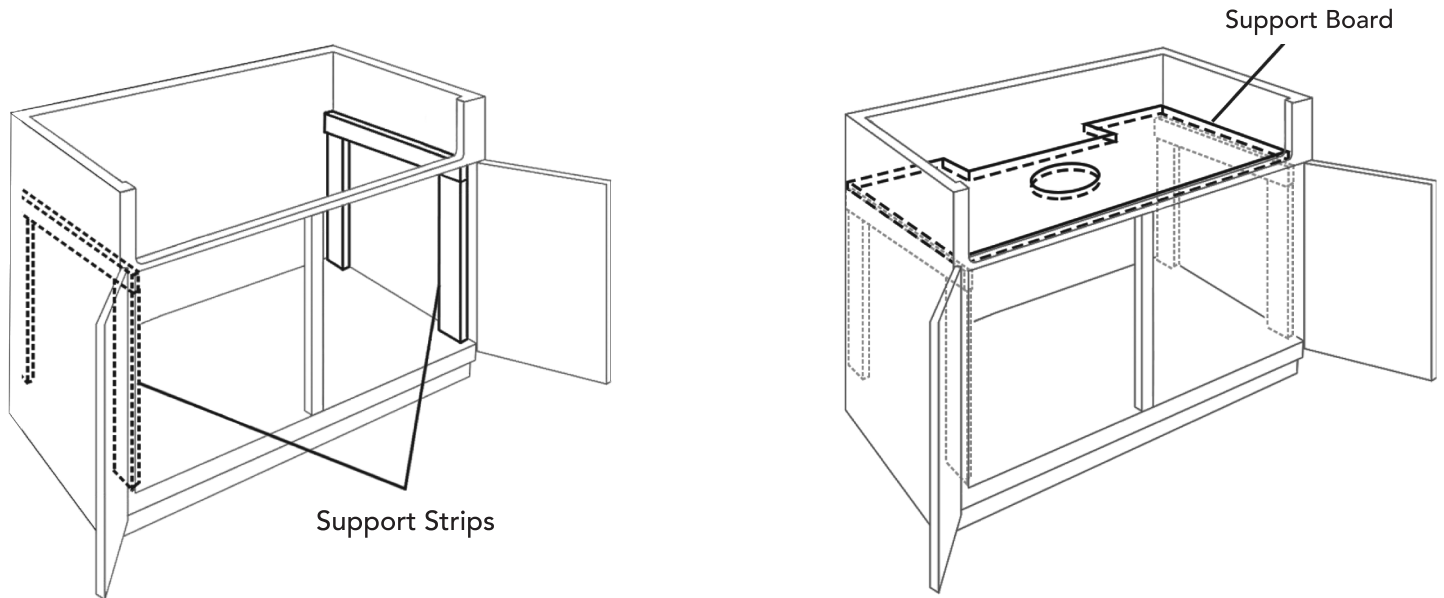

- This step is to ensure that the bottom of the sink has enough support.
- Construct a wood support frame to fit inside the cabinet opening. Allow adequate clearance for the water supply lines and drainage system.
- The recommended support frame design is shown in the illustration on the left, which consists of four vertical supporting strips, two horizontal supporting strips and one supporting board. Due to the variety of installations possible with this sink, your installer may suggest a different support frame design.
- **IMPORTANT:** Base cabinet and wood support frame are essential for proper installation. The weight of the sink when full is approximately 300 lbs. Base cabinet and support frame must sufficiently support this weight.

STEP 4: SINK INSTALLATION

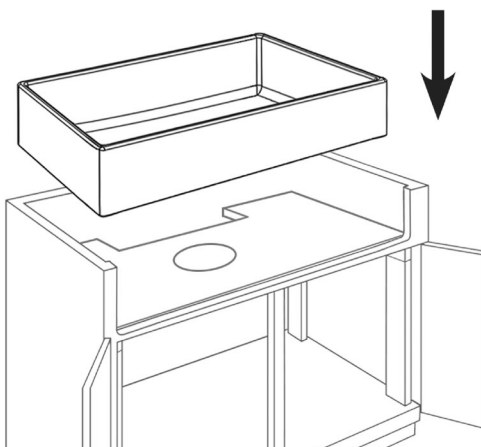


- Using two people, carefully place the sink in place. Verify that the sink can fit in the cabinet opening and rest properly on the supporting system. Make a small adjustment to fit as necessary.
- Verify the overall appearance and check for levelness to ensure correct drainage.

IMPORTANT: Risk of personal injury or product damage. Handle with care. The product can break, chip, cause injury or product damage.

SOLEA[®]

STEP 5: COUNTERTOP INSTALLATION

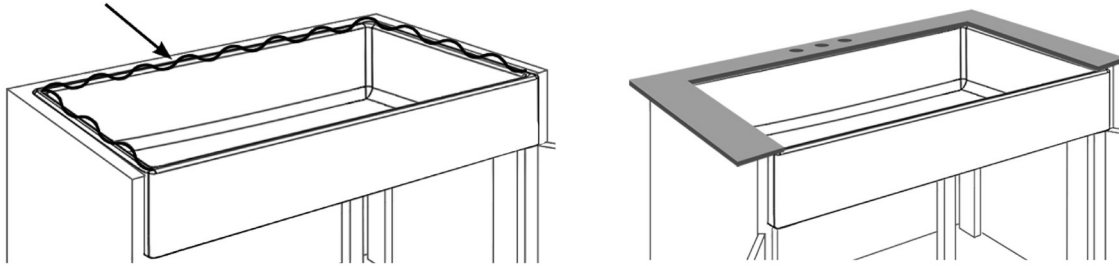

- After cleaning, apply a bead of silicone sealant between the top flange (or lip) of the sink and the countertop to create a watertight seal. Clean excess silicone immediately. Verify the overall appearance and check for levelness to ensure correct drainage.
- Carefully place the countertop and verify that it is level.

IMPORTANT: Due to the dimensional variation from the fireclay manufacturing process, Solea Sinks does not offer the cutout template for fireclay sinks. It is essential that prior to installation, you discuss with your installer and agree on the final appearance. Cabinet should NOT be cut or fabricated without the sink.

IMPORTANT: Apron front sinks from Solea Sinks should only be fastened to a solid surface countertop

FINAL STEPS

Connect water supply and drainage system per manufacturer's instructions.
Run water to test for leakage.

SOLEA IS A REGISTERED TRADEMARK OF SAFAVIEH INTL LLC
FOR HELP WITH THIS PRODUCT, PLEASE GO TO [SAFAVIEH.COM](https://www.safavieh.com) / CONTACT
40 HARBOR PARK DRIVE NORTH, PORT WASHINGTON, NY 11050