INSTALLATION



GALAXY-W7MRL2028/2432/2836/4032

LED BATHROOM MIRROR Lighting and Defogger

IMPORTANT SAFETY INSTRUCTIONS

When using an electrical furnishing, basic precautions should always be followed, Requires two(2) person in installation.



DANGER

READ AND FOLLOW ALL INSTRUCTIONS BEFORE USING THIS MIRROR.



WARNING

To reduce the risk of burns, fire, electric shock or injury to persons. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use outdoors.



WARNING

Risk of electric shock. Connect this furnishing to a properly grounded circuit only. See Grounding instructions.

GROUNDING INSTRUCTIONS:



WARNING

This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.

An Electrical option cabinet must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.

NOTE: To ensure the normal use of product, it is required to set out wires as per the regulations of IEE. The product is only applicate to the indoor installation. The installation must be executed by a professional electrician, wrong installation may lead to product damage and personal injury.

PLEASE SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

ALL RIGHTS RESERVED



GALAXY-W7MRL2028/2432/2836/4032

INSTALLATION

LED BATHROOM MIRROR Lighting and Defogger

TOOLS REQUIRED FOR ASSEMBLY















PARTS INCLUDED







24"*32" W7MCL2432



28"*36" W7MCL2836




40"*32" W7MCL4032

DESCRIPTION	QUANTITY
LED Bathroom Mirror	1

HARDWARE INCLUDED (not shown actual size)



SCREW



DRYWALL ANCHOR



WIRE CONNECTOR



NOTE: Determine overall mirror dimensions before proceeding to installation.

*All dimensions & specifications are approximate and subject to change without notice.

*Accessories and parts may vary from the picture above. Depends on the product model and size.

GALAXY-W7MRL2028/2432/2836/4032

INSTALLATION

LED BATHROOM MIRROR Lighting and Defogger

ELECTRIC CONNECTIONS

ALL WIRING SHOULD BE DONE BY A QUALIFIED LICENCED ELECTRICIAN



WARNING: Shut off power before wiring the mirror.



WARNING: An Electrical option mirror must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.




WARNING: This mirror must be connected to a grounded, metal permanent wiring system or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the mirror.




CAUTION: Requires 120 VAC 20 Amp GFI protected circuit.

vertical hanging

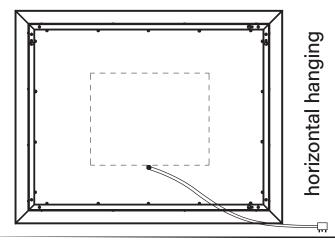

Electric wiring: Be sure to provide enough wire to make the proper and safe connection to the Field/Power.

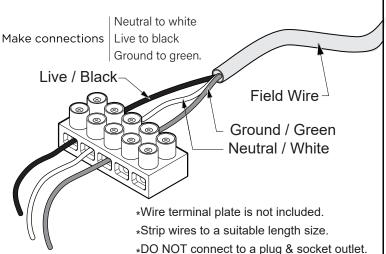

MIRROR FEATURES

- 4mm copper free silver mirror
- High output LED lighting: CRI 90+, 6000K±500 CCT, IP44
- Dimmable touch switch
- Vertical and horizontal mount options
- Defogger is seperate controlled


INSTALLATION INSTRUCTIONS

1

PLACEMENT

Choose to mount the mirror in either a vertical or horizontal orientation. Once the orientation is chosen, measure the distance between the center of the keyholes in the mounting bracket.


vertical hanging

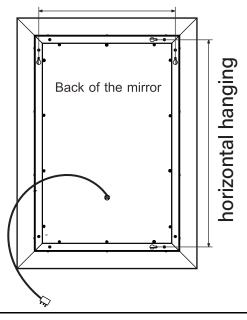

2

SUPPORT LOCATION

After measuring the distance between the keyholes on the mirror, mark the mounting points on the wall in the appropriate spots. These marks should be the same distance apart as measured in step 1. Use a level to ensure the mounting points are straight.

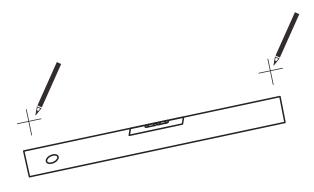


3

INSTALL SCREWS

Using a drill, make holes on solid wall, and tighten mounting screws into the drywall anchors, leaving 3/8 in. space between the screw head and the wall.



В

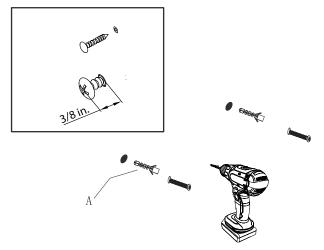


4

POWER OFF

Please turn off all the power before the mirror wires connection.

Power Off

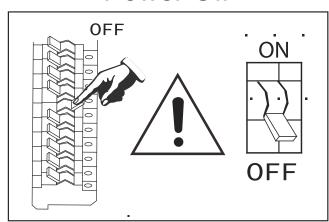


INSTALLATION INSTRUCTIONS

5

CONNECTION

Use the wire connector connect to external power supply, and pusing the power supply wires into the junction box.

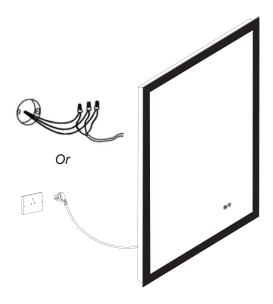


Warning: when use plug connection, please mind the space gap between wall and mirror frame

6

Turn on the power

Insert the screw heads into the keyholes on the mirror's mounting bracket, then carefully let the mirror drop down so the screw heads slide into the narrow ends of the keyholes, securing the mirror in place. Then turn on the power at the circuit breaker or reinsert the fuse.

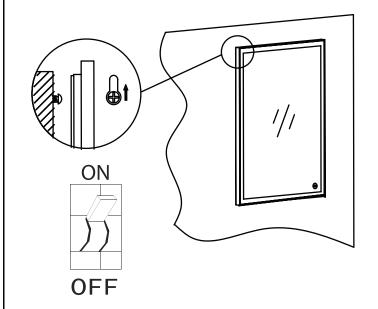

FINAL ASSEMBLY

How to use Defogger Switch and Dimmer Switch:

Left Touch Sensor



ON/OFF Anti-foggy(The power will automatically go off in an hour)







"Switch"sign



ON/OFF Lighting
Brightness control by holding

OPERATION

- 1. Touch the sensor button to turn ON the light.
- 2.Touch and hold the sensor button to dim the light.Release the button when the light reaches the desired brightness setting.
- 3. Touch the sensor button to turn OFF the light.

^{*}Suggestion: Turn off the mirror power supply if you don't use it for a long time.


WARNINGS:

- 1.Please do not use if you found the mirror have been broken.
- 2. Never put any sharp or heavy material on the mirror surface, other wise the glass mirror will be broken and body injury accidents may occur.
- 3. Turn off the power switch in storm lightning weather to avoid electric parts damage.

Use and Maintenance:


CAUTION:

• USE

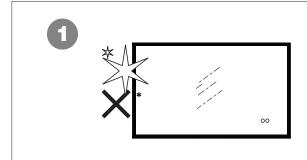


1. To avoid damage, do NOT knock the mirror with any hard objects;

CLEANING

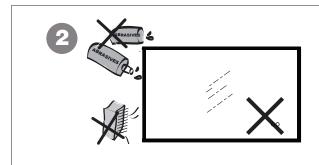

2. Do NOT clean the mirror with caustic cleaner. Do NOT wipe the mirror with Bristle brush;

MAINTENANCE

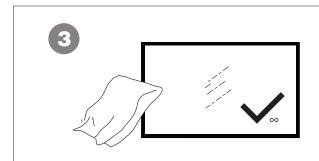

3. For daily maintenance, please use soft cloth and mild cleaner to clean the mirror.