
#### **ASSEMBLY INSTRUCTIONS**



- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

# **TOOLS REQUIRED**

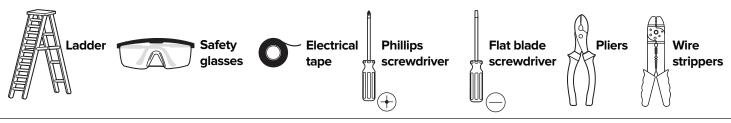


### HARDWARE INCLUDED



### \*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


#### **EXPLODED PARTS**

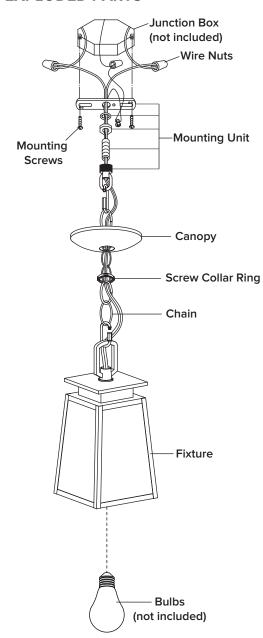

# **INSTALLATION**


#### STEP 1

Use the mounting screws to attach the mounting unit to the junction box




### STEP 2

- 1. Choose the length of the chain you need (Open the chain using a phillips screwdriver (not included) and pliers (not included).)
- 2. Attach the end of the chain to





- 1. Pass the chain and the branch wires through the screw collar ring and canopy.
- 2. Attach the end of the **chain** to the mounting unit.
- 3. Feed the branch wires through the pipe nipple on the mounting unit.

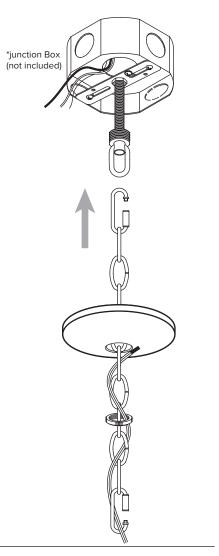

# **ASSEMBLY INSTRUCTIONS (INSTALLATION)**

Make the electrical connection from the junction box (not included) to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

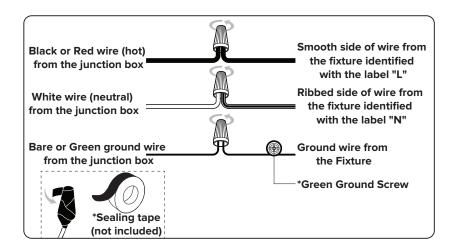

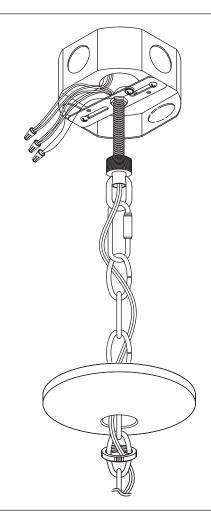

### STEP 5

Secure the canopy to the mountring unit with the screw collar ring.

