

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED




Ladder



Safety Goggles



Electrical Tape



Phillips Screwdriver



Flathead Screwdriver




Wire Cutter



Wire Stripper

HARDWARE INCLUDED



Fixture



Mounting Unit



Deco Ring



S-shaped iron sheet



Screws 1



Hex Nut



Screws 2



Mounting Screws




Wire Nuts



Spanner

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

EXPLODED PARTS

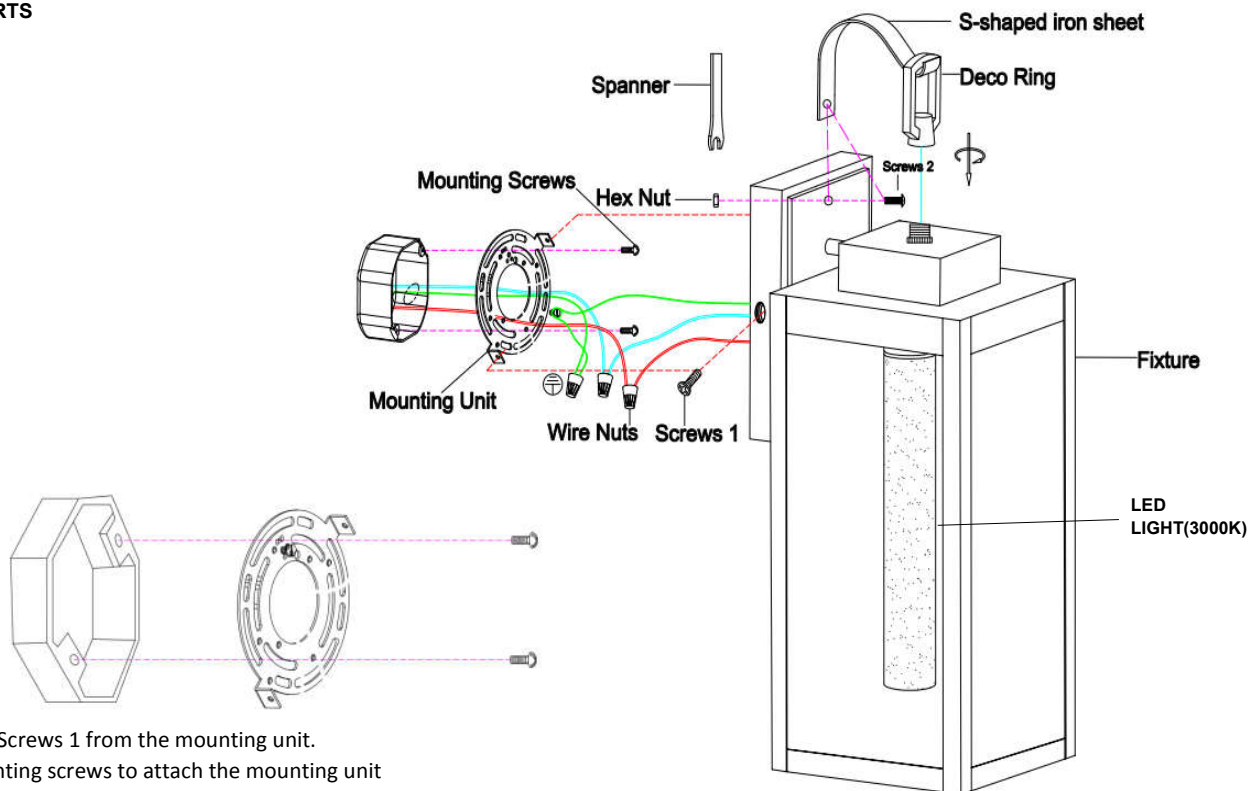


STEP 1

Unscrew the Screws 1 from the mounting unit.

Use the mounting screws to attach the mounting unit to the junction box.

STEP 2


Tighten the Deco ring clockwise onto the Nipple of the fixture. If it does not reach the correct angle after tightening, you can slightly loosen the metal ring back to the correct angle to make the metal ring more beautiful.

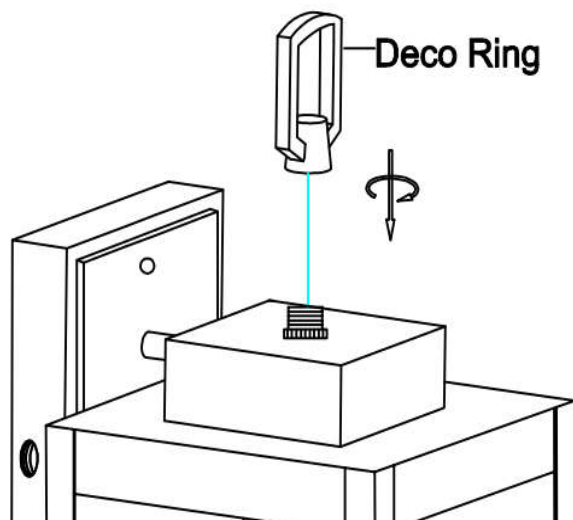

The metal ring installed on the top of the lamp is only an ornament, if it does not reach the correct angle after tightening, you can slightly loosen the metal ring back to the correct angle to make the metal ring more beautiful, so that does not affect the function of the product.

STEP 3

Hang the S-shaped iron sheet into the Deco ring as shown in the following figure, align it with the screw hole on the back plate, and use screw 2 to pass through the hole. Then, use spanner to lock the hex nut onto the screw for fixation.

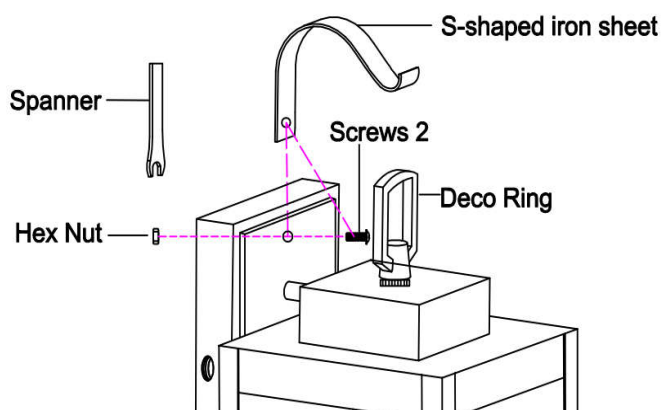

STEP 4

Make the electrical connection from the junction box to the fixture.
Connect the ground wire to the mounting unit using the preinstalled green ground screw.
Then, connect the positive, negative and ground wires with the supplied wire nuts.
Secure with electrical tape

Black or Red wire(hot)
from the Junction box

White wire (neutral wire)
from the junction box

Bare or green ground wire
from the Junction box

Black wire from
the fixture

White wire from
the fixture

white wire(neutral)
from the Junction box

Green Ground Screw



Sealing tape

