


DESCRIPTION	PICTURE	CODE	QTY
Mounting Bar + Screw + Canopy Cap		12 / 15	1 SET
Mounting Box Screw		13	2 PCS
P3 Wiring Cap		14	3 PCS
Small wrench	\\ \\		1 PCS
Canopy		10	1 PCS
Movable head shake+nut+gasket		9 / 11	2 SET
Down Rod 12"		5/6/7/8	8 PCS
A few meters and seven little spanner		3	1 SET
Locking cap		4	3 PCS
Lamp body part (B)		2 / 17	1 SET
Lamp body part (A)		1 / 17	1 SET
Lron wire hood		16	6 PCS

WARNING - if any Special Control Devices are used with this Fixture, Follow the instructions Carefully to assure fun compliance With N.E.C. requirements. if there are any questions, contact a Qualified Electrical Contractor. CAUTION - All glass is fragile, use care when handling Glass component(s) and or Lamp(s). WARNING - This product contains chemicals known to the State of California to cause cancer, birth defects and /or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product

CANOPY MOUNTING & WIRE CONNECTION ASSEMBLY STEPS:

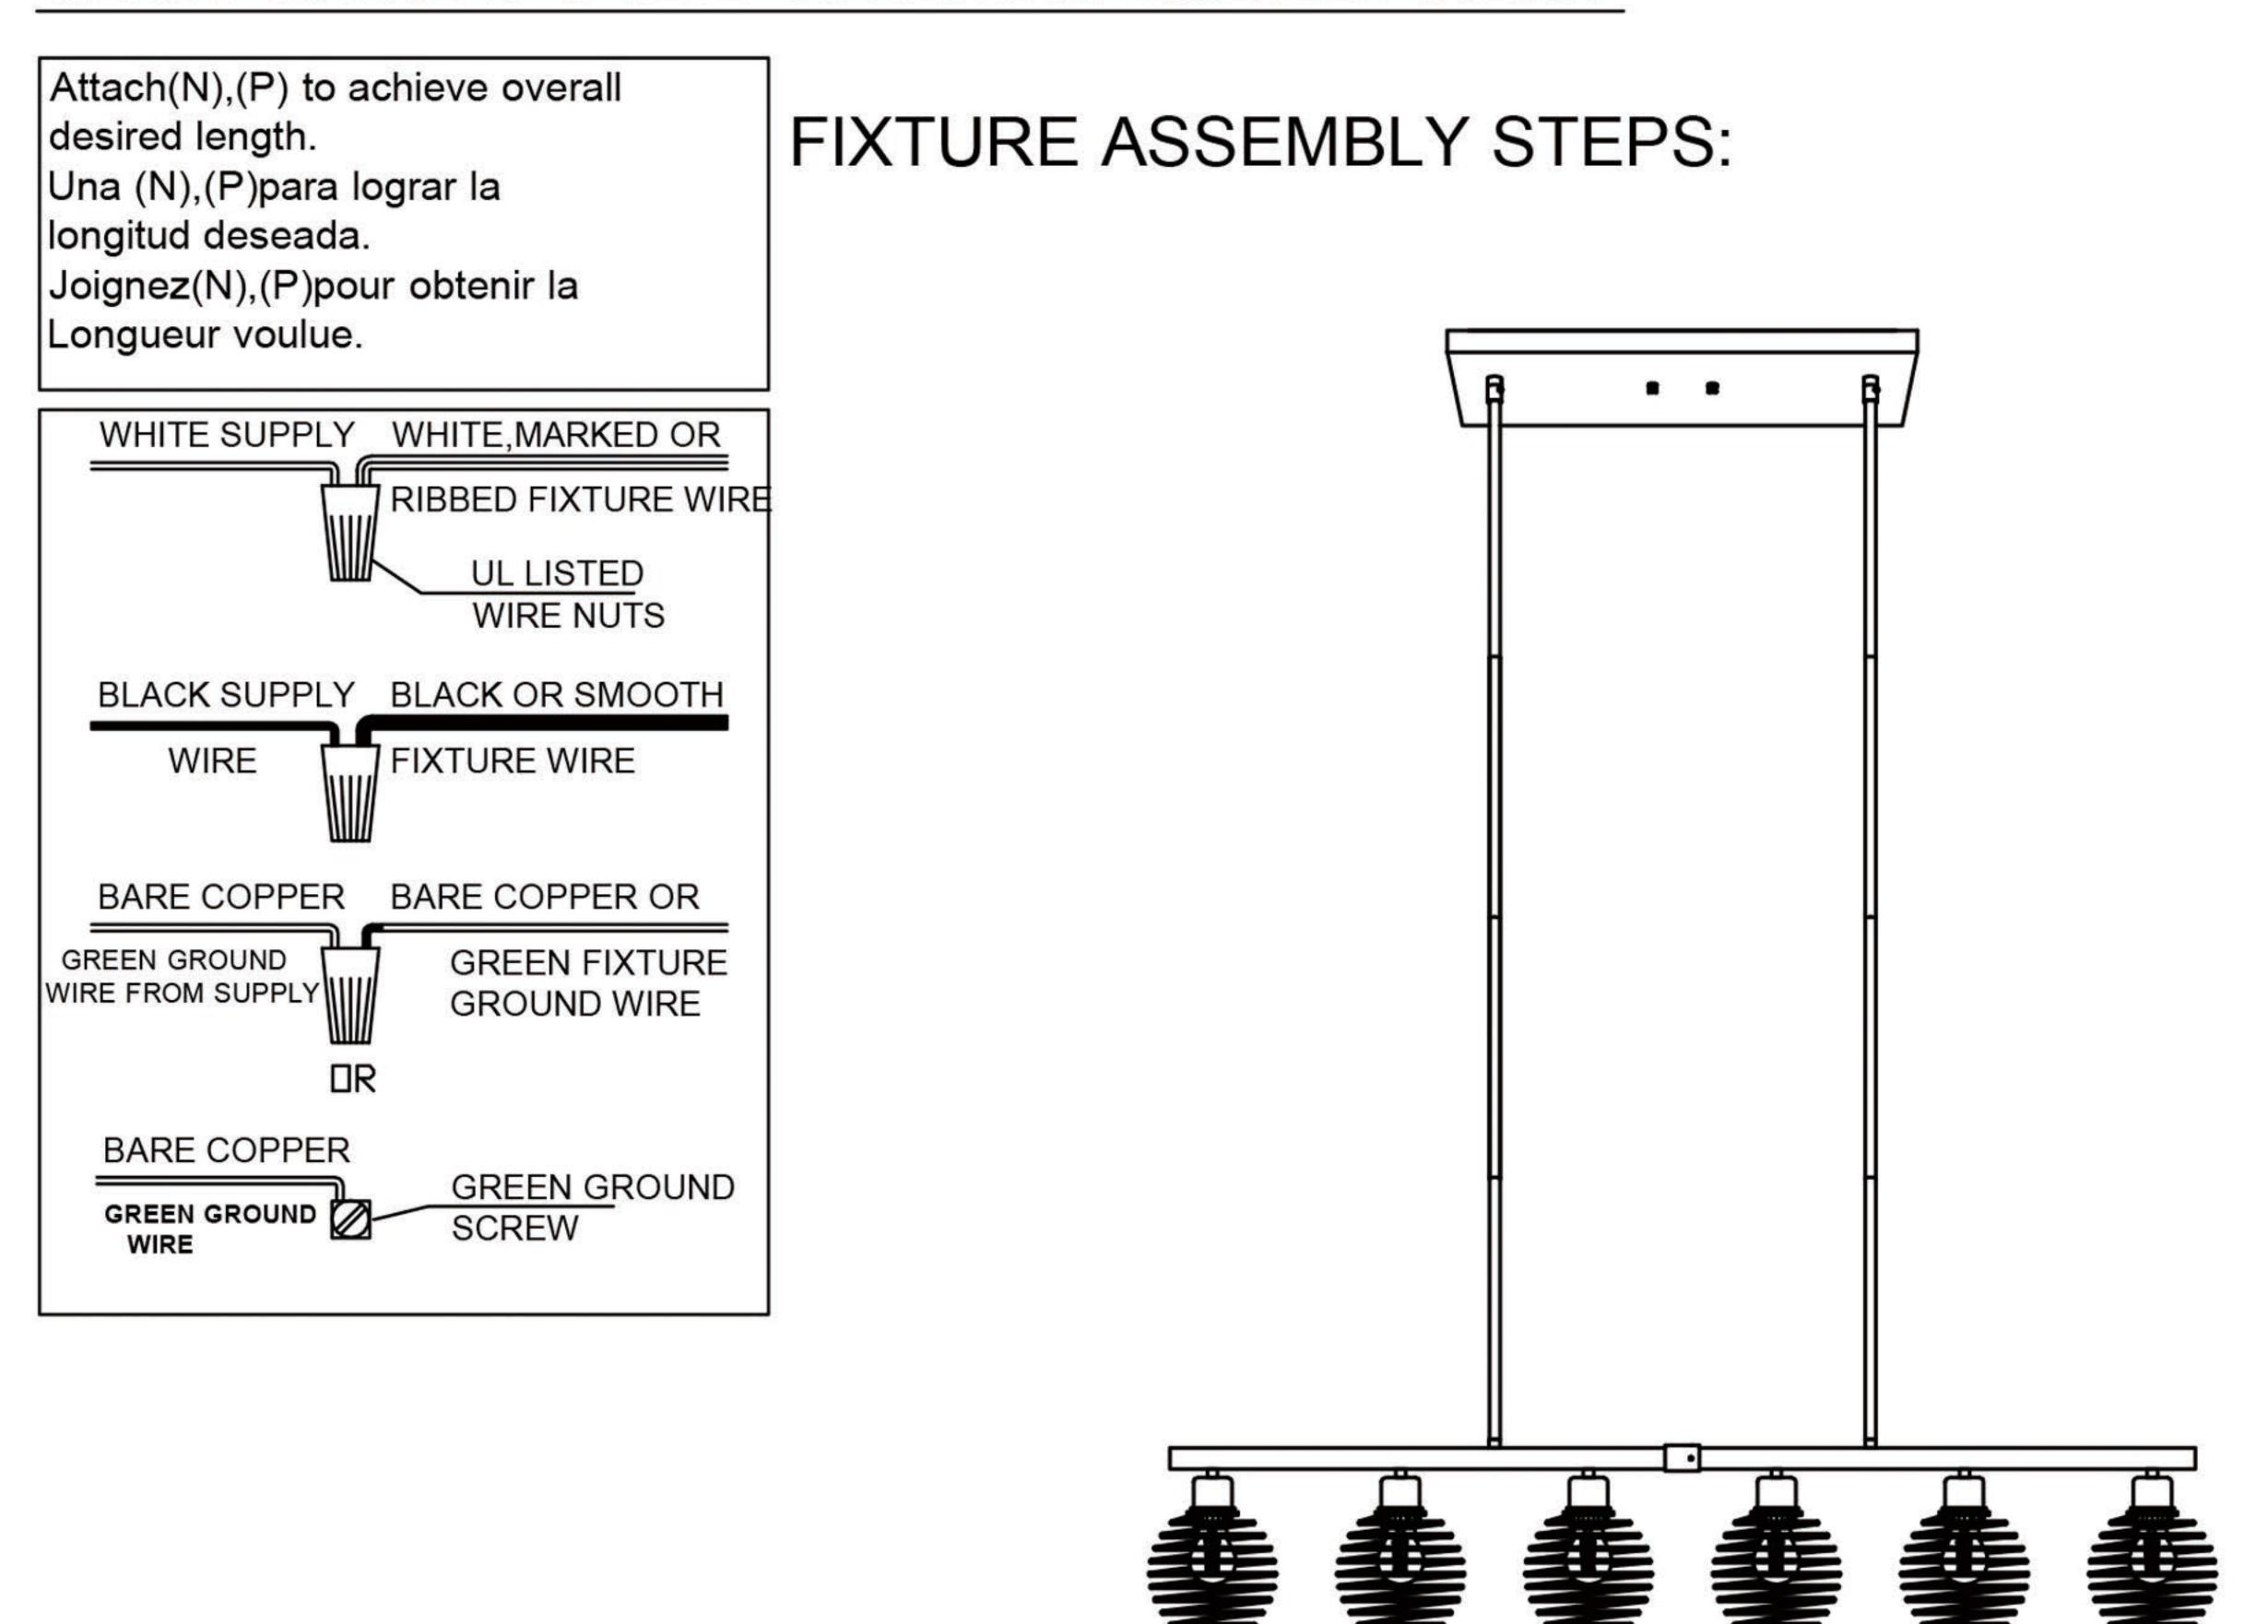

ITEM NO.:23606BK

110-120V / 60Hz E26 6*MAX 60W TYPE A (Do not contain light bulb)

- 1. AC110~120V,50~60Hz.The Max lamps power is 60W TYPE A Bulb.
- Avoid to scratch the surface of lighting and the wires when install it.
- 3. Printed on the wire: SPT-1/20288 or SPT-2 and other parameters of the line for the positive pole (Connect "L"), The wire without mark is the negative pole (Connect "N"), Ground cables are connected to ground cables (Connect "🕀"), (L- L,N-N,🕀 🕀).
- 4. Don't install it to the ceiling before it's completely dry, thesurrounding around must be ventilated and dry.
- 5. Keep away from the acid, basicity objects and gases, clean withsoft cloth, water washing is not allowed.
- 6. Be careful when you install glass lamp shade.
- 7. The lighting must be installed by professional electrician and used indoor only.
- 8. Please keep attention to cut off the power supply when installing, cleaning, and replacing bulb.