

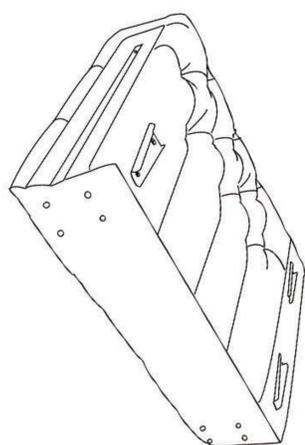



ASSEMBLY INSTRUCTIONS

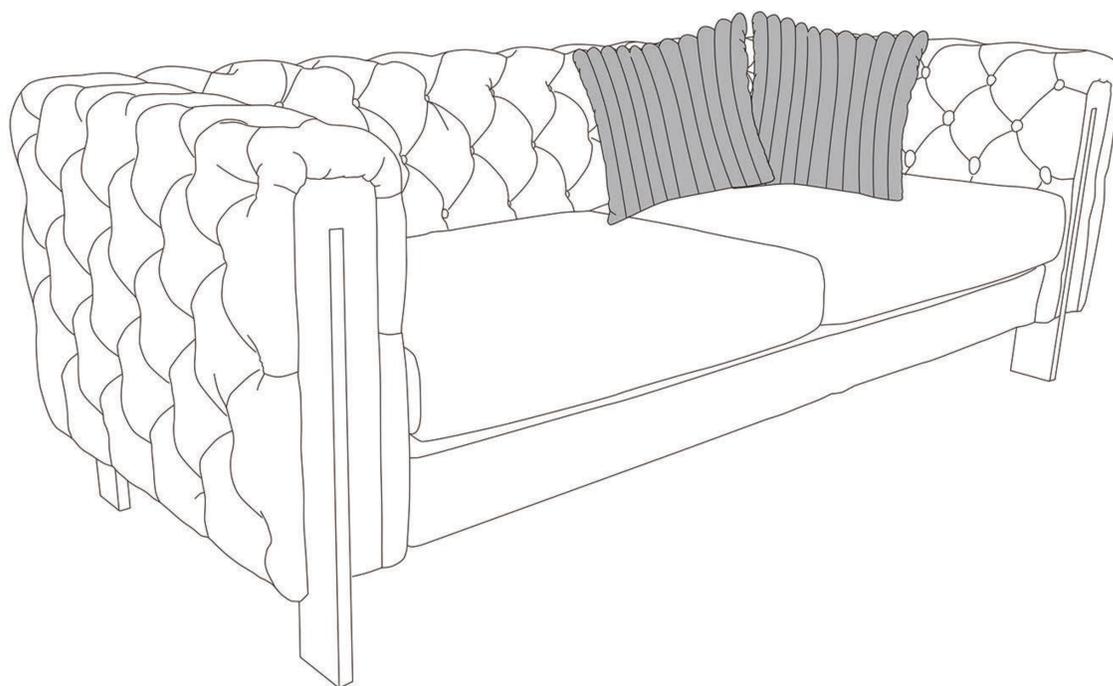


A: Left Arm x 1pcs

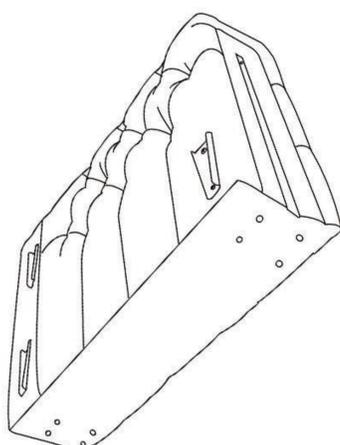


B: Right Arm x 1pcs

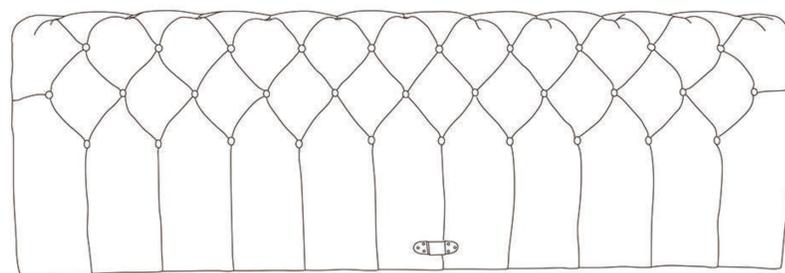

C: Sofa Back x 1pcs

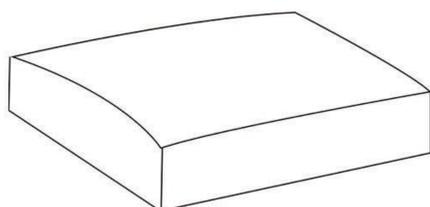

D: Seat Cushion x 2pcs

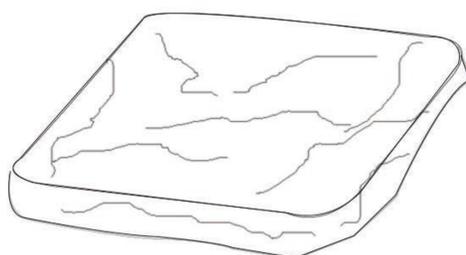


E: Seat cushion cover x 2pcs




F: Pillow x2pcs




G: Bottom Board x 1pcs




H: Front Board x 1pcs




I: Center Bar x 1pc




J: Side Bar x 2pcs

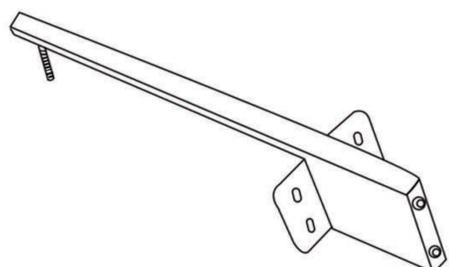


K: Front leg x2pcs




L: Back leg x2pcs



M: Screw 20MM x18pcs




**N: Washer
x 22pcs**



**O: Screw 60MM
x4pcs**




**P: Hexagon Socket
Screw Keys x1pcs**



**Q: adjustable middle leg
x 1pcs**


P.S: insert the long bolt into the hole,at the same time there is some distance between the leg and the bottom of the arm,then push the leg from the bottom to the end.

① insert the long bolt into the hole

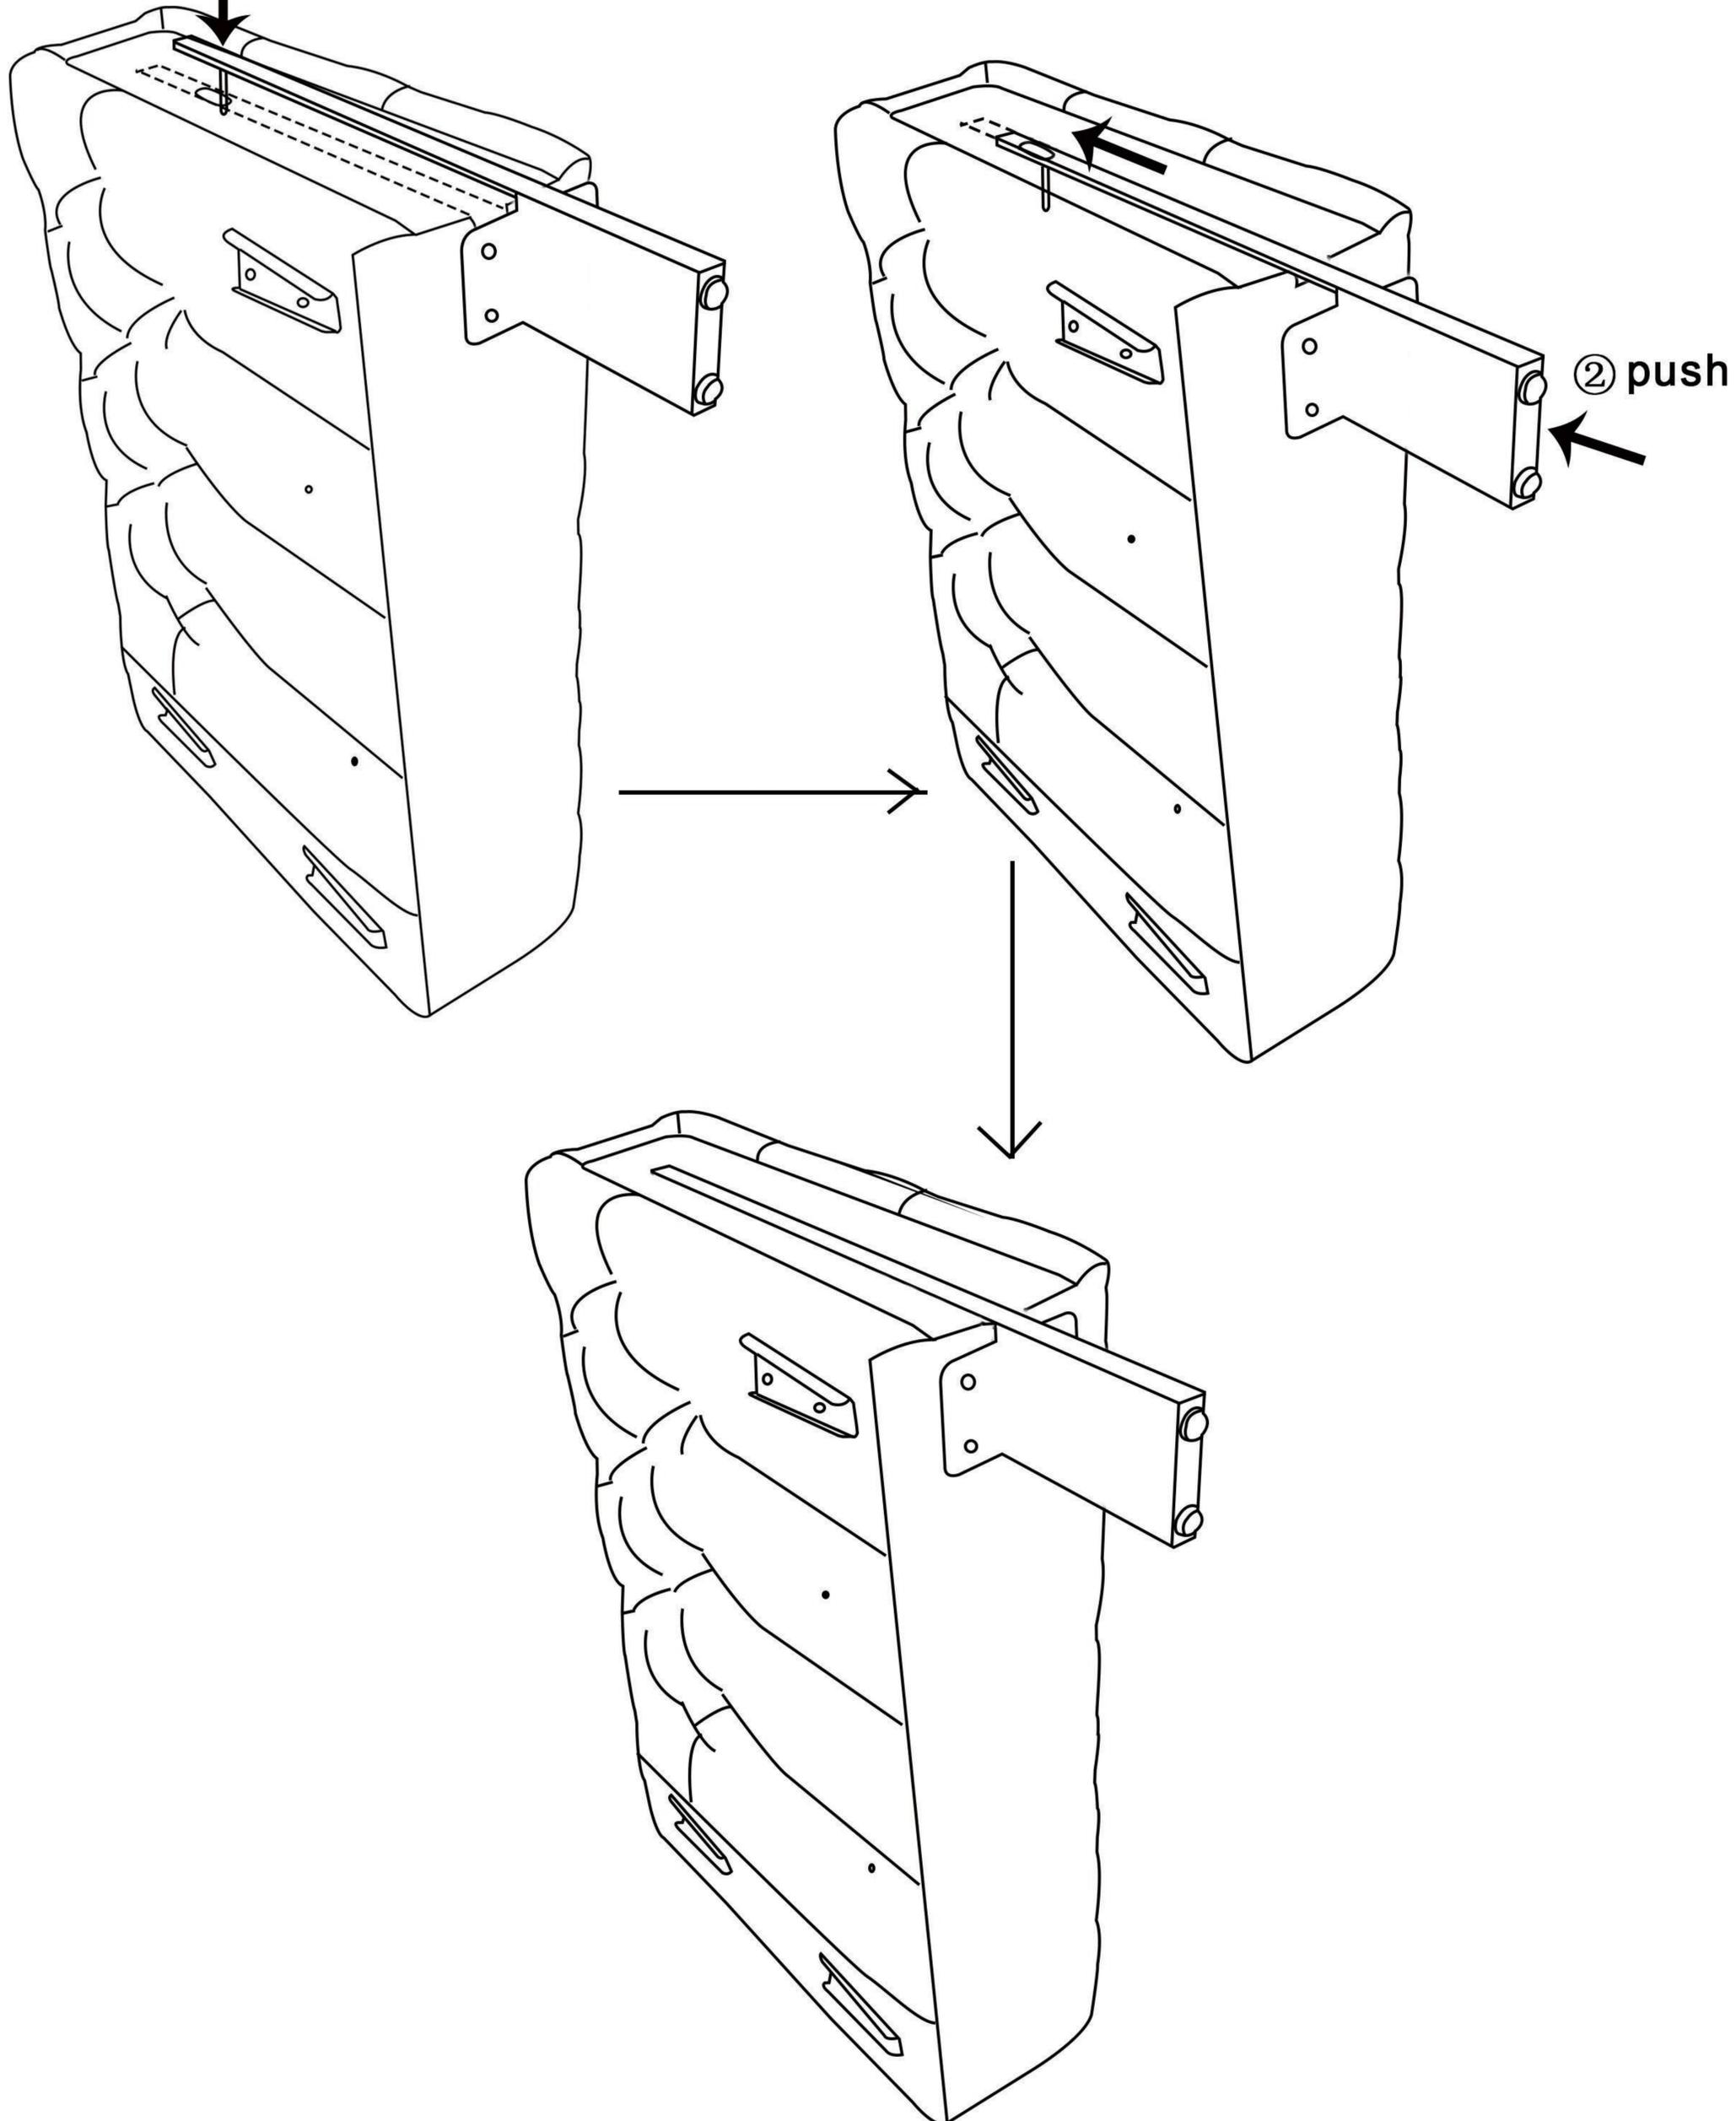

Step 1


① Insert the long bolt into the hole first.

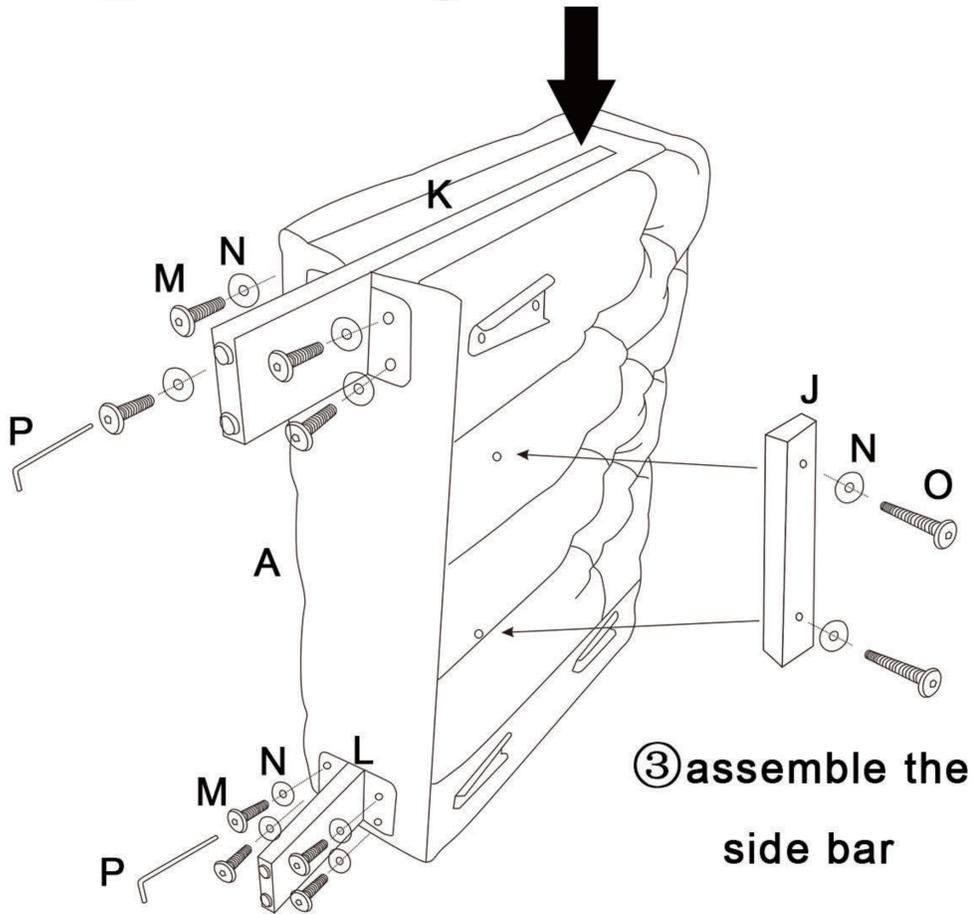

② assemble the legs.

Step 2

① Insert the long bolt into the hole first.

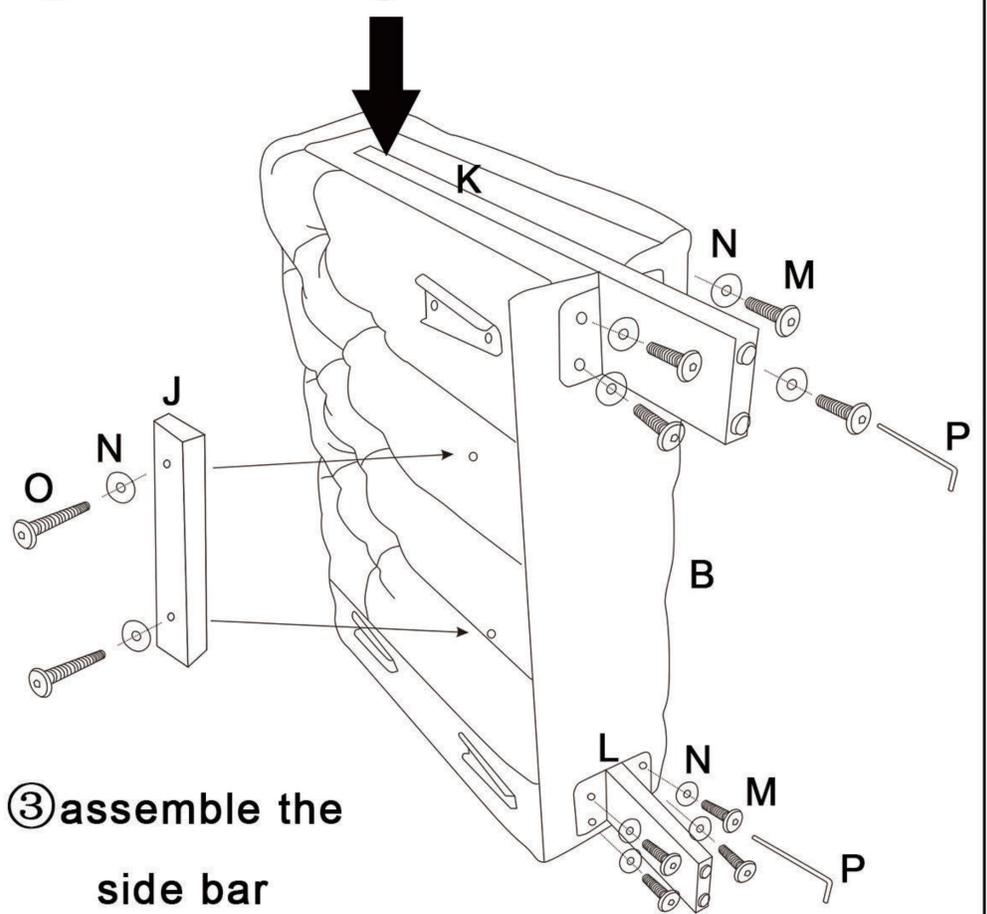


③ assemble the side bar

② assemble the legs.


Step 3

① Assemble the sofa back

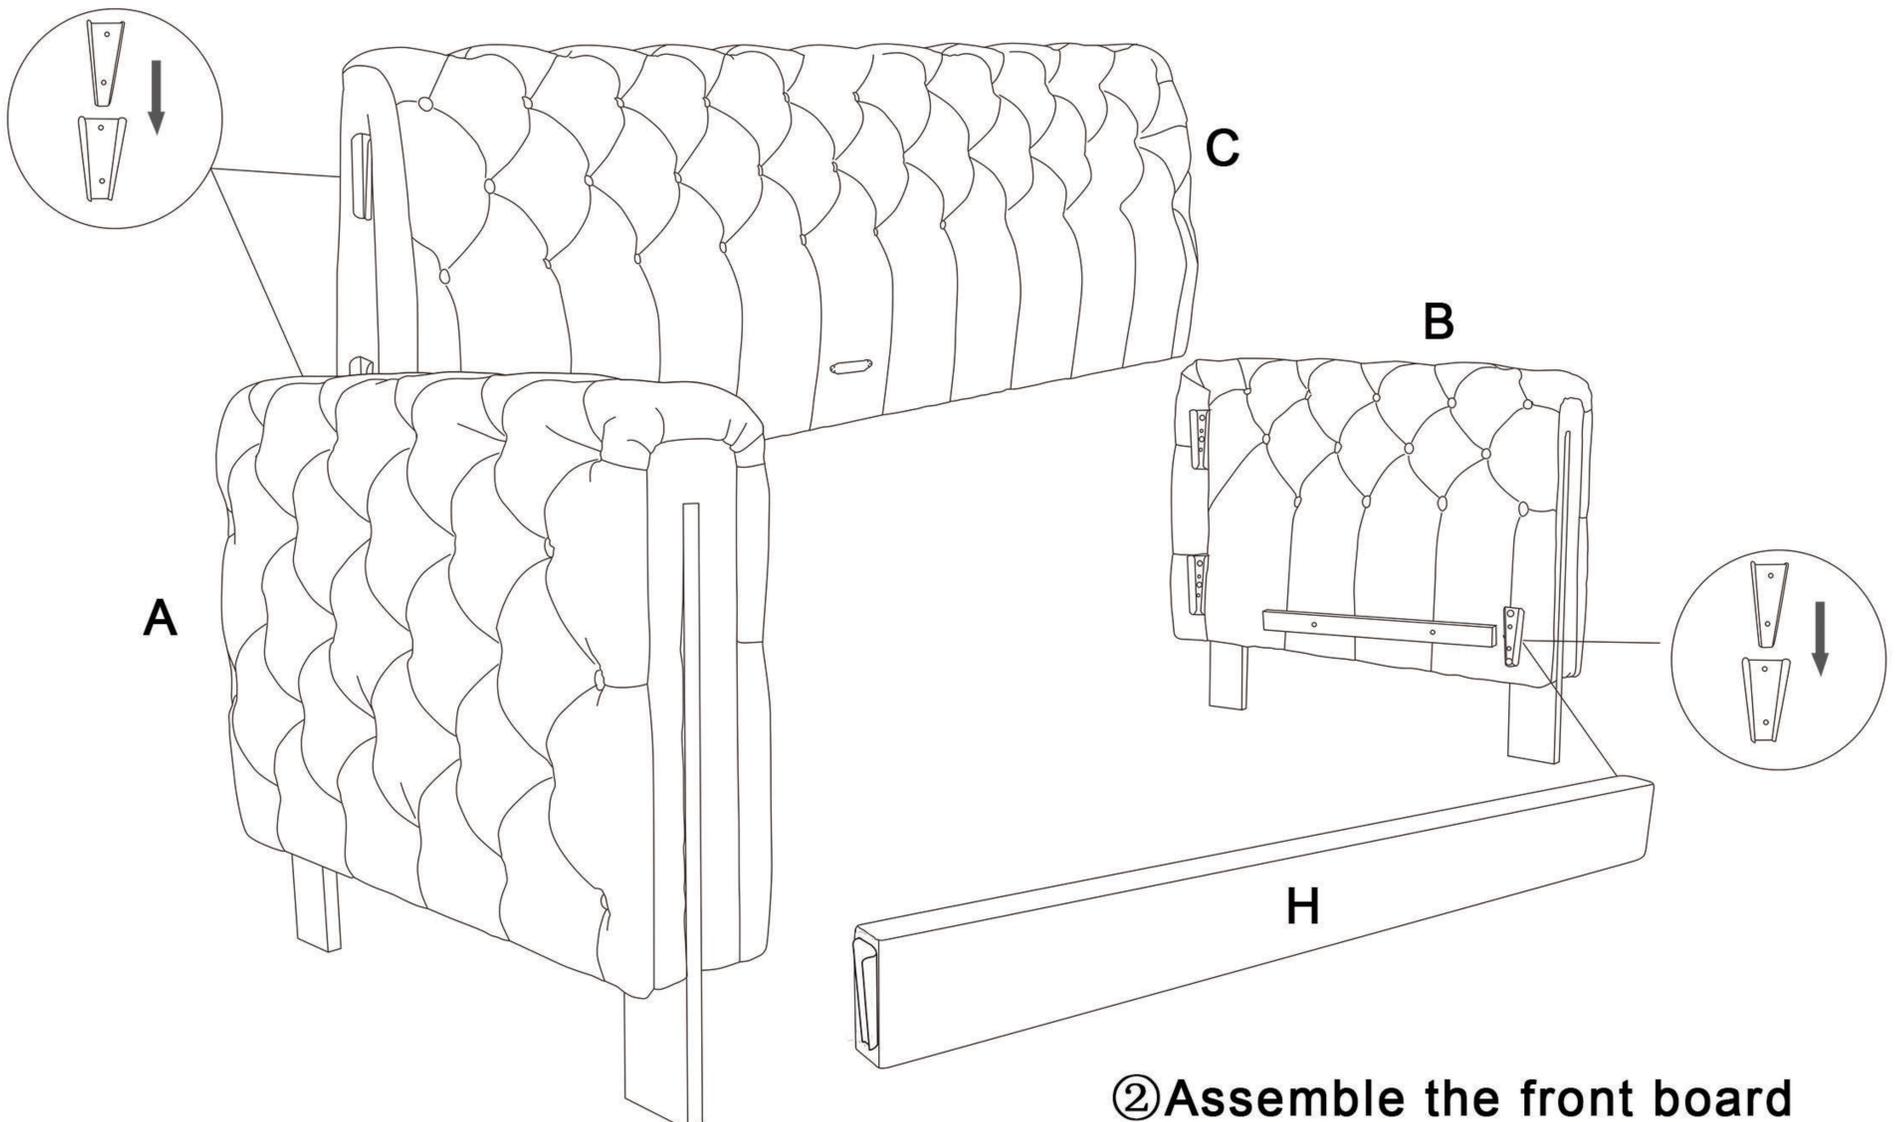


② Assemble the front board

Step 4 Assemble the center bar.

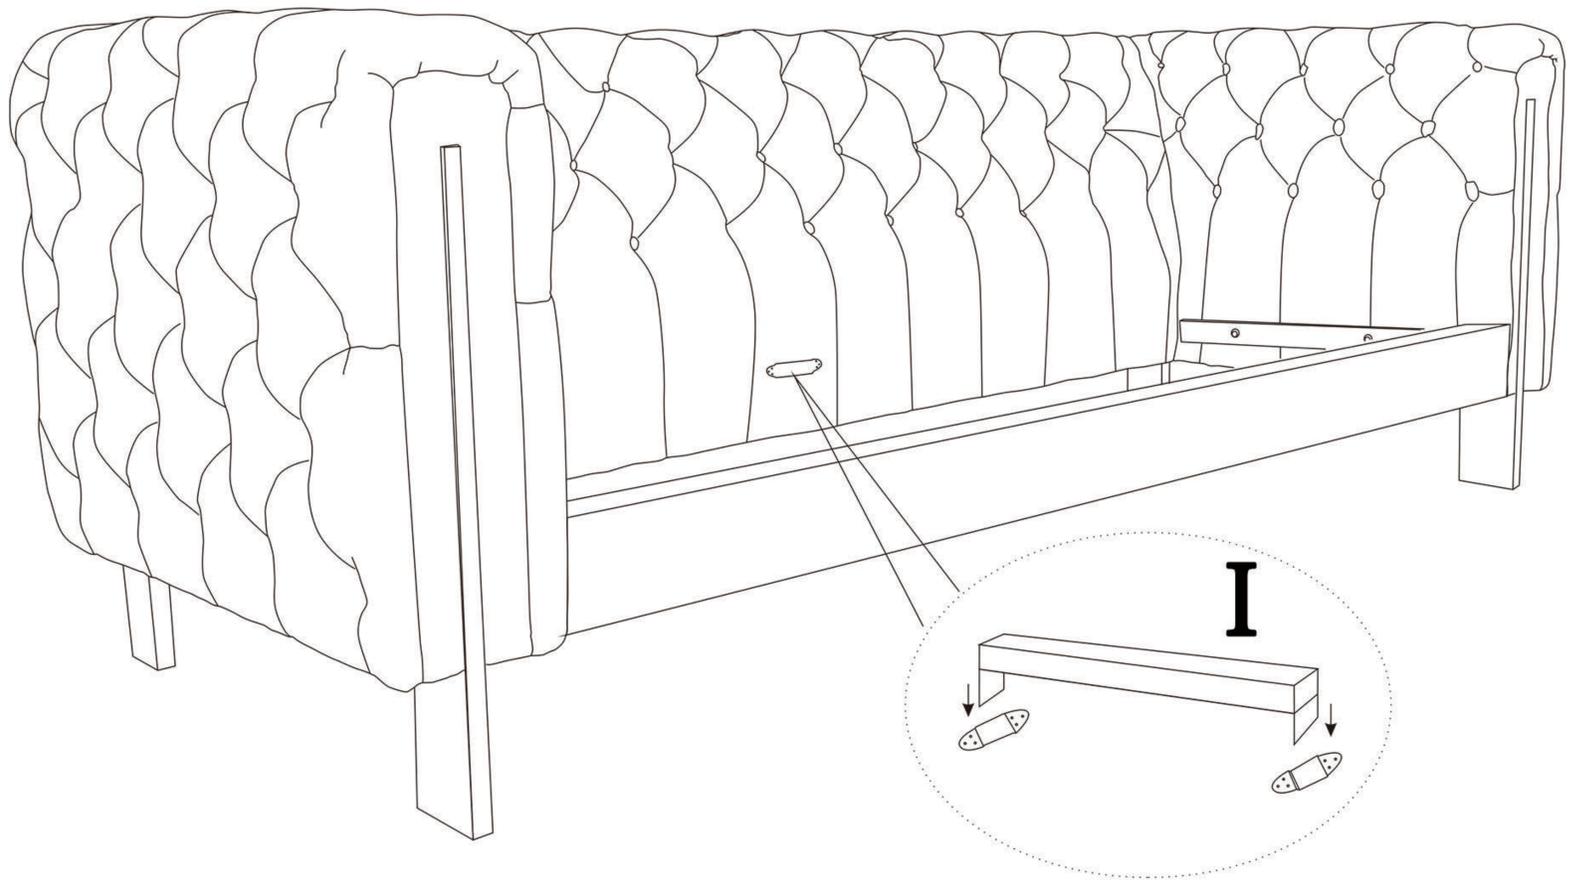


Step 5

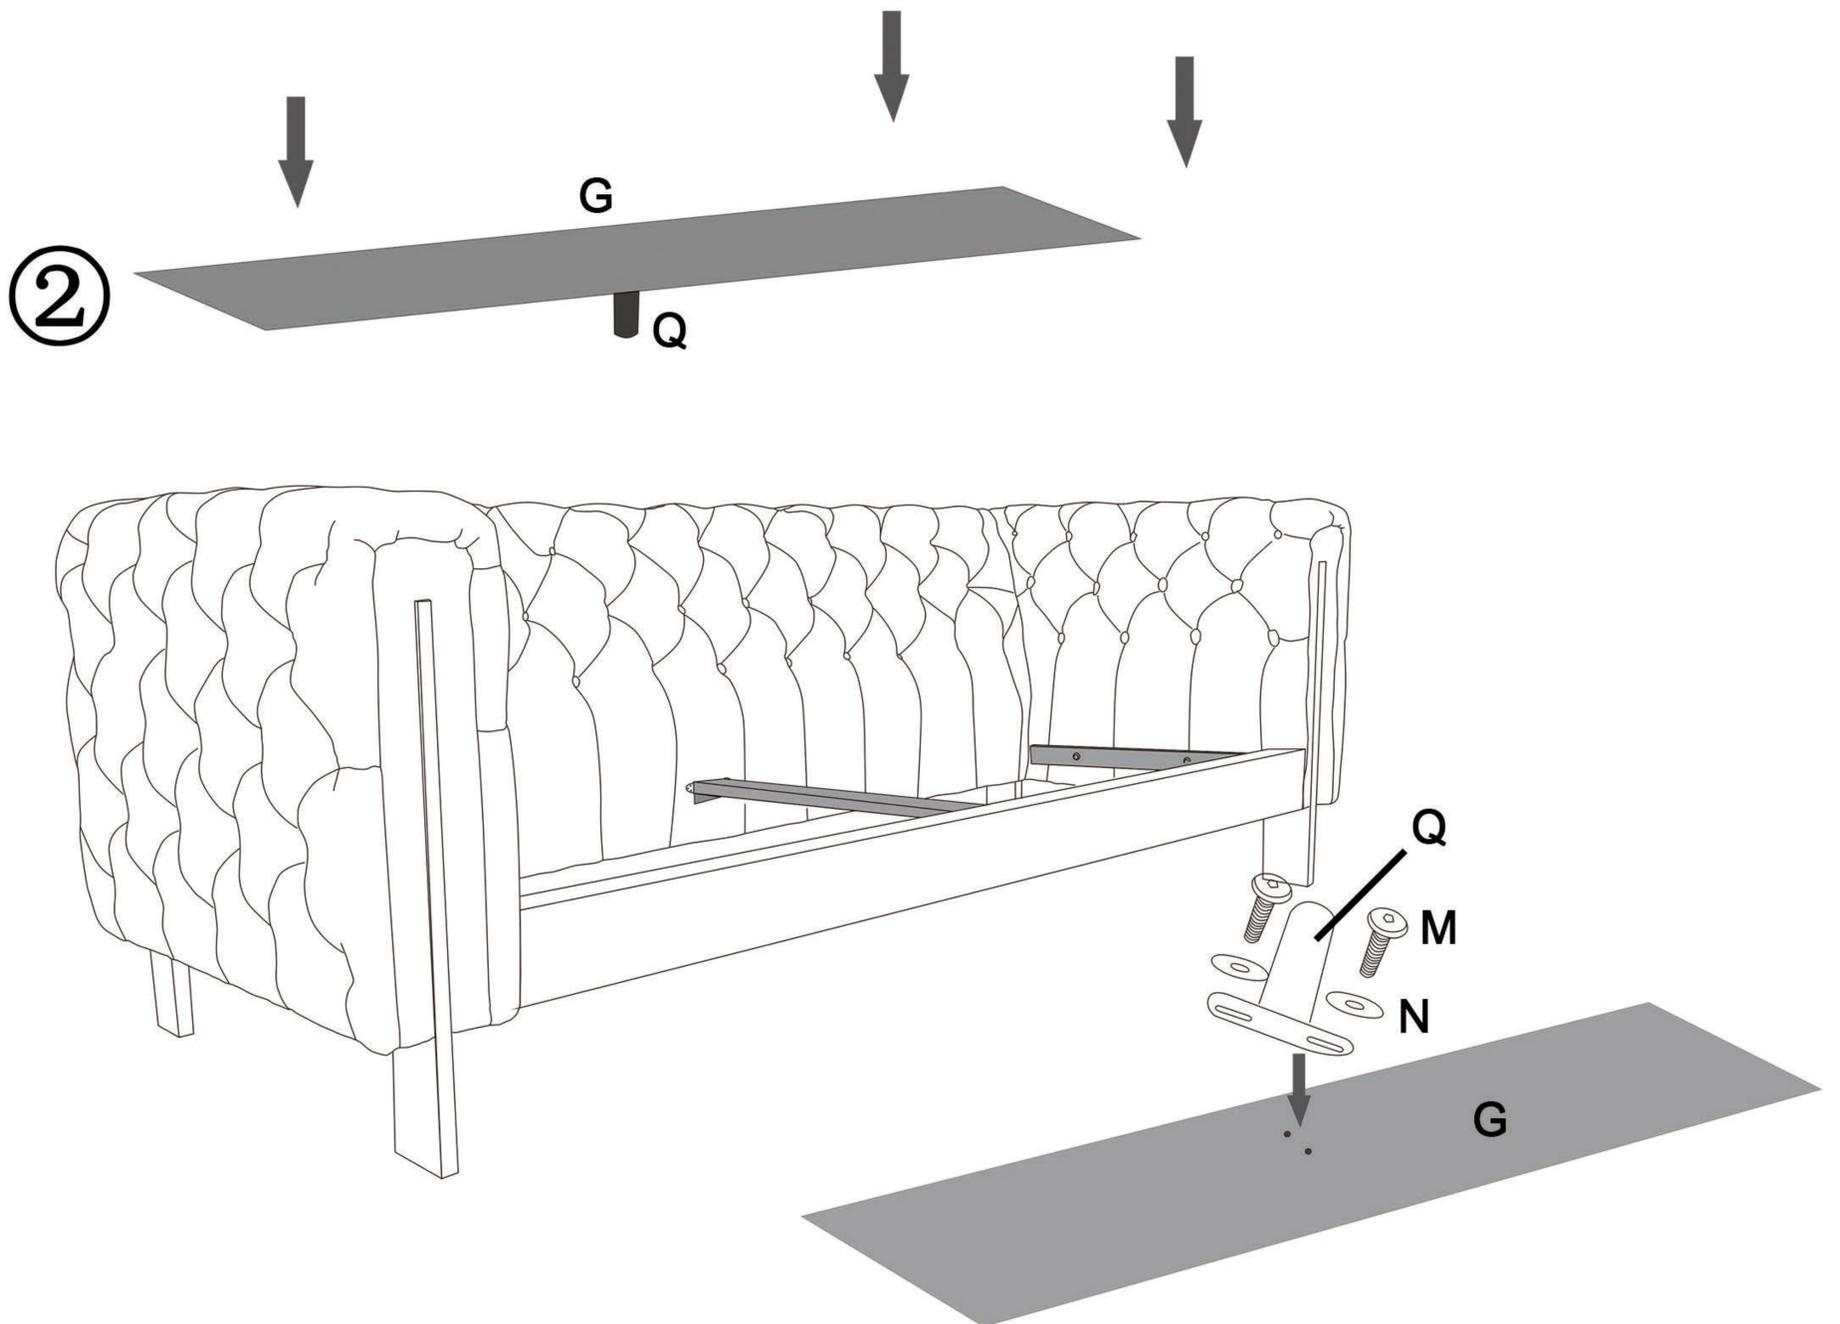


① Assemble the middle leg in the middle of the bottom board first.


Step 6 Assemble the seat cushions, then put on the bottom board.

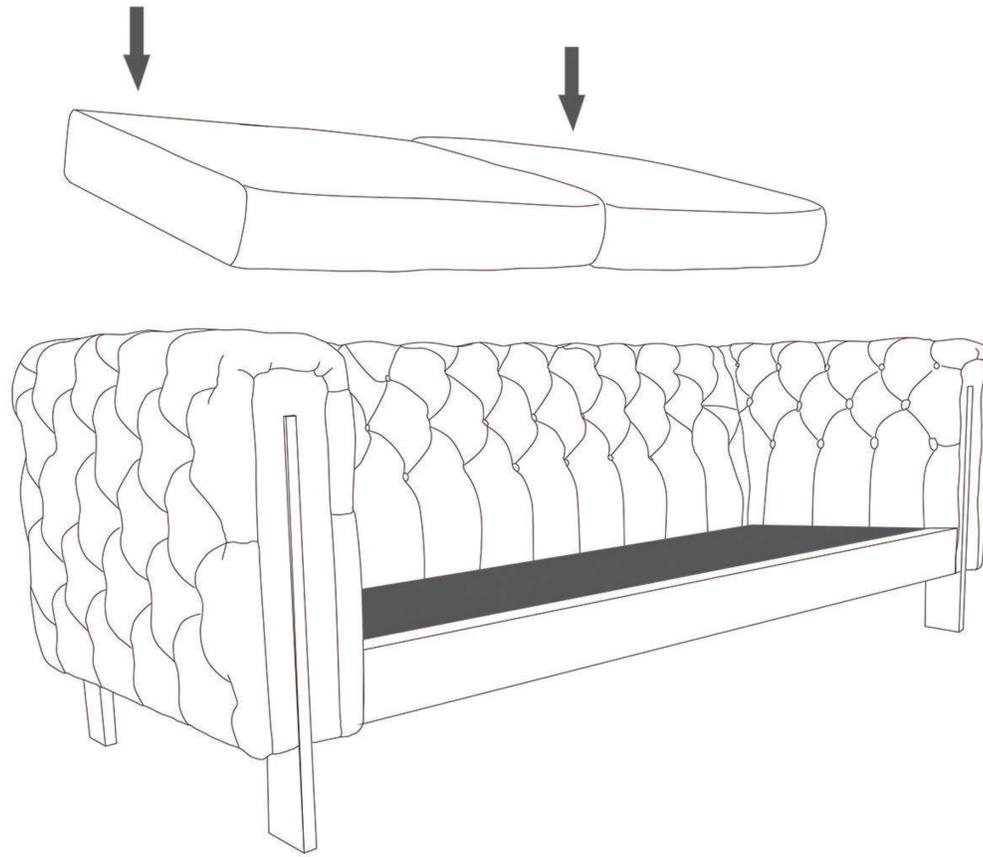

Step 7


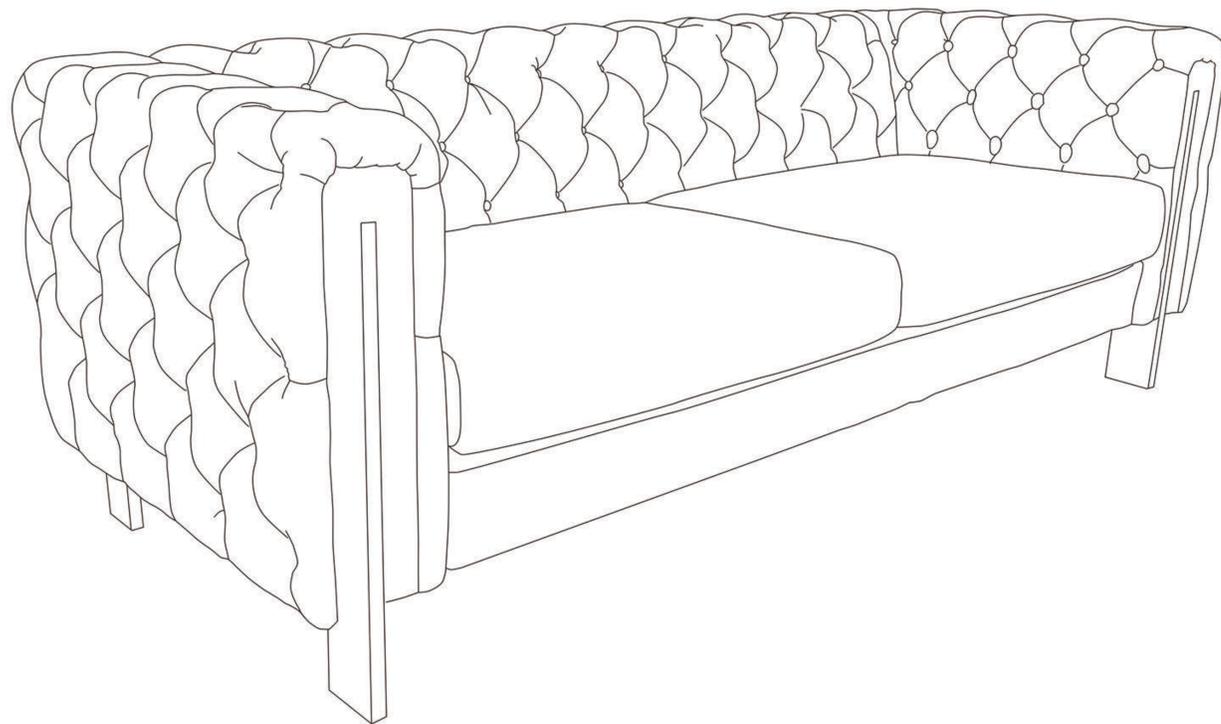


Step 8

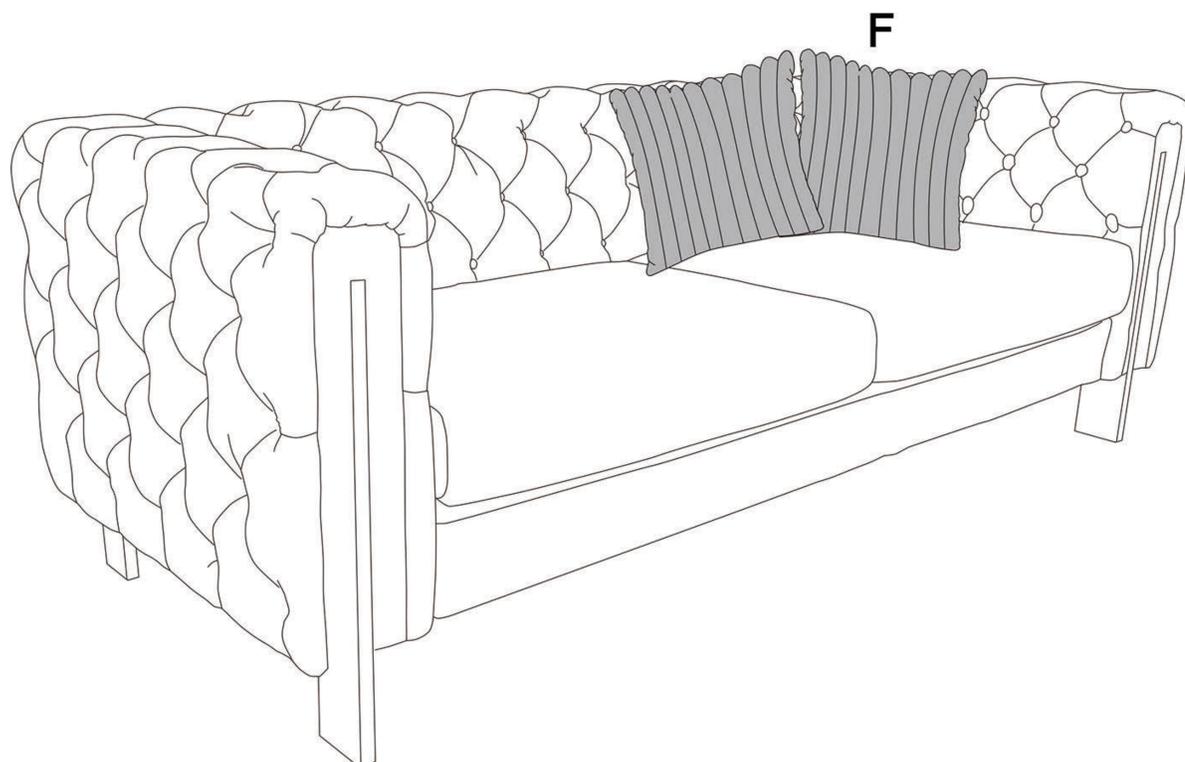

How to install the seat cushions

Step 1. Open the plastic bag and remove the two seat cushions foam.

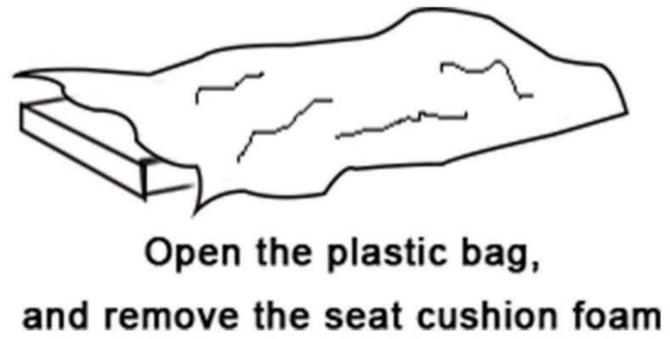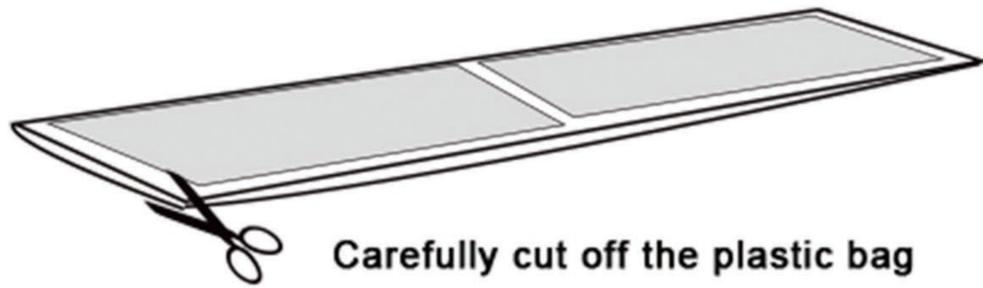



Step 2. Cover the fabric covers to the seat cushions foam. When you get the foam, 1) you need to identify which side is the top and the bottom. The surface is with polyester fiber which will be the top of seat cushion, another side will be the bottom of seat cushion.

2) How to identify the front side and back side?


The polyester fiber is fully cover the front side which will be the FRONT side of seat cushion, another is BACK side of seat cushion.

3) Finally, how to identify the back side of the fabric cover?

The fabric with zipper which will be the back side of seat cushion.

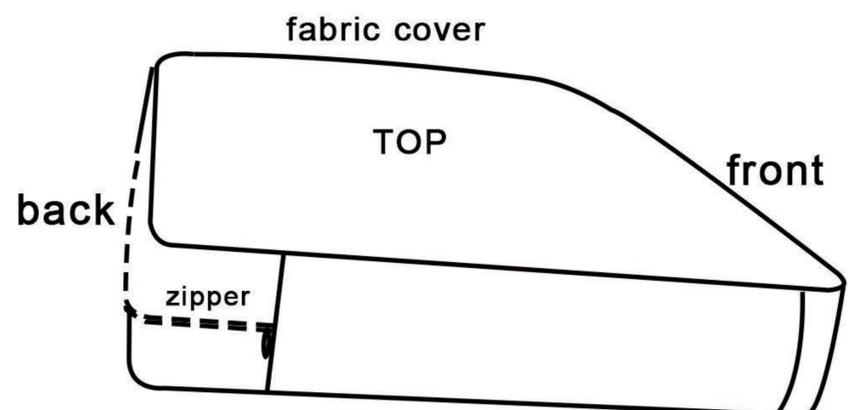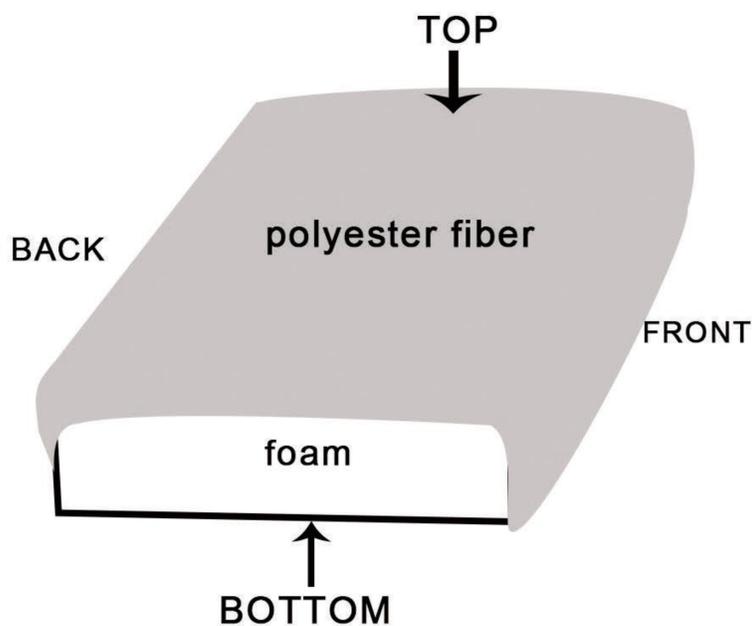

How to tidy sofa seat cushion?

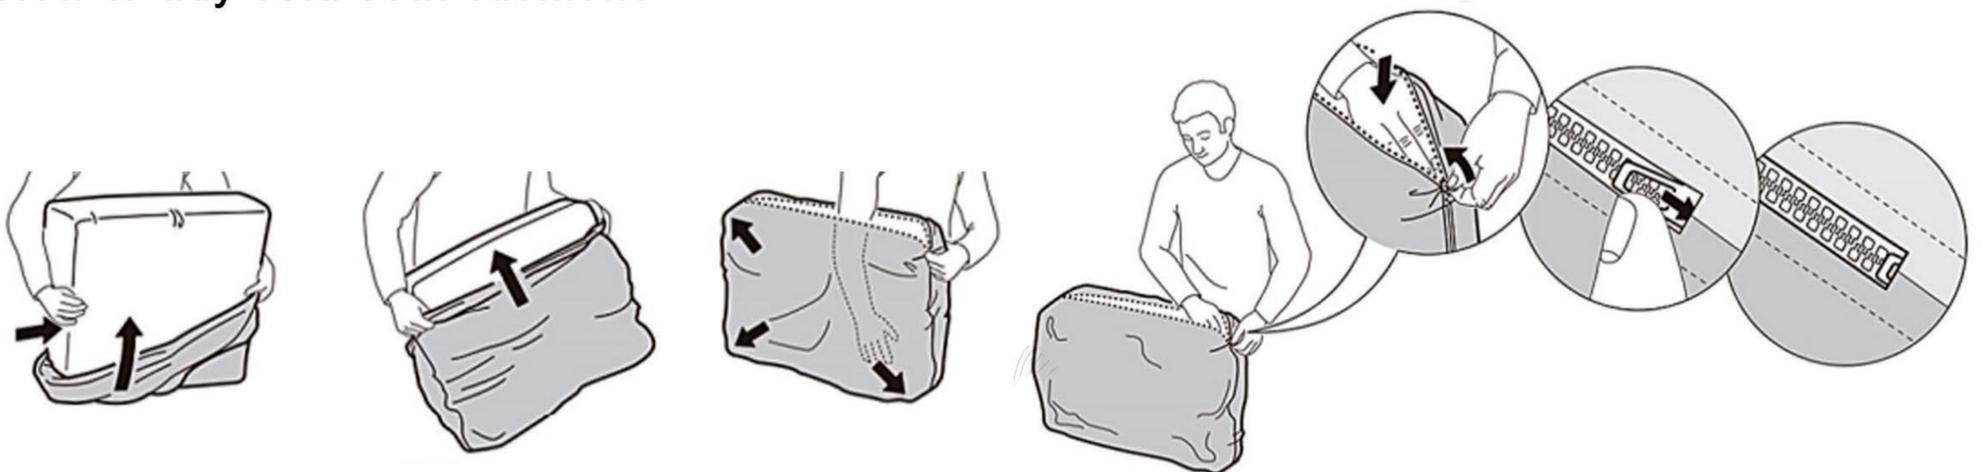

At the beginning the seat cushions are a little loose which is normal. Please allow at least 72 hours for the seat cushions foam to recover to its natural state after covering the fabric covers.