



Put arm 1 and fixture 2 on a flat surface, adjust two arms in a proper position to make the whole fixture straight, after that fixed both arms with grub screw

1. Install the arm 1 to the fixture 2 with grub screw 3.

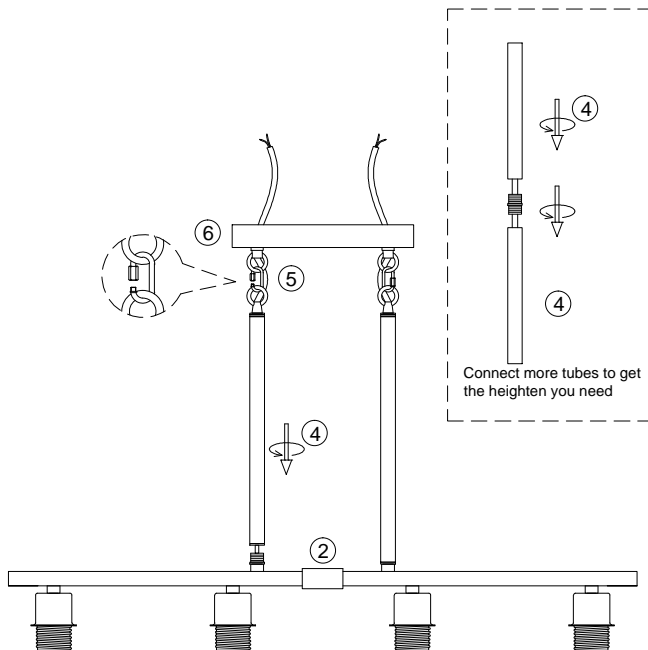

2. Let the wire go through the hanging tube 4, rotate to fasten the tube on the fixture 2, connect the fixture and the canopy 6 with carabiner hook screw connection 5, after that let the wire go through canopy 5.
(connect more tubes to get suitable heighten)

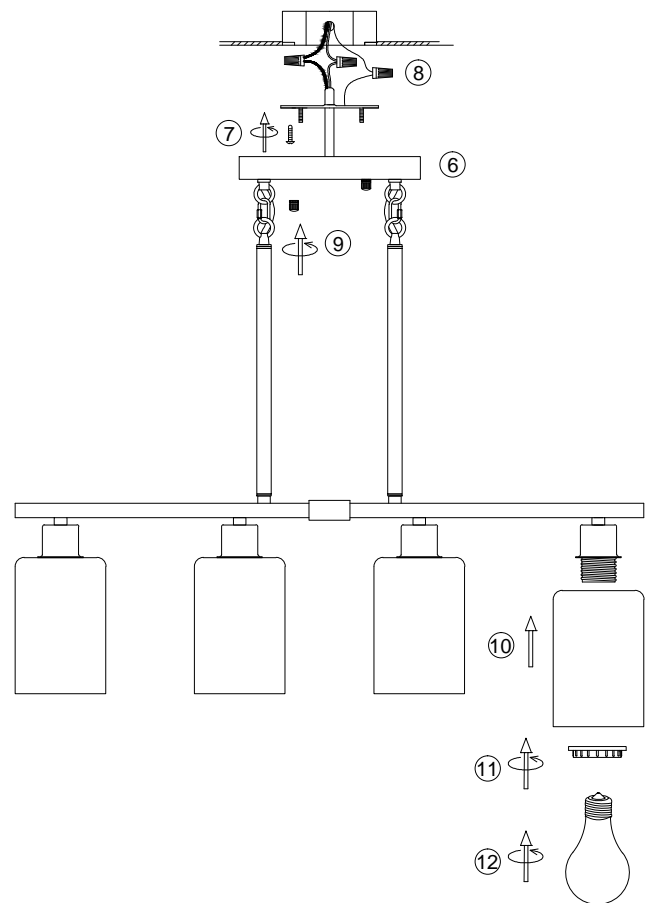

3. Install the bracket 7 on the junction box with screw.
4. Connect the wire to your home line .
5. Install the fixture 6 on the bracket with cap nuts 9.
6. Install the glass lampshades 10 with ring 11, after that install the bulbs 12.

D0068-4

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !