





ASSEMBLY INSTRUCTIONS

RESIN GARDEN SHED





SITE PREPARATION

Level the ground surface.





Recommendation: Construct a wooden or concrete base as a foundation.

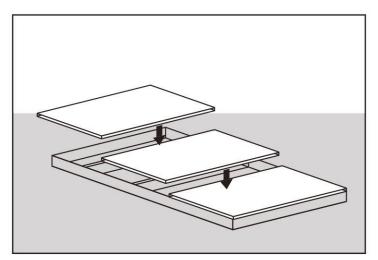

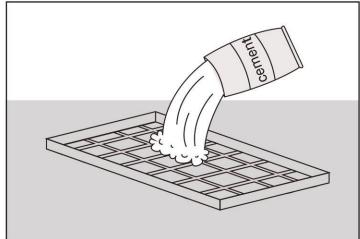

The external dimensions of the product :

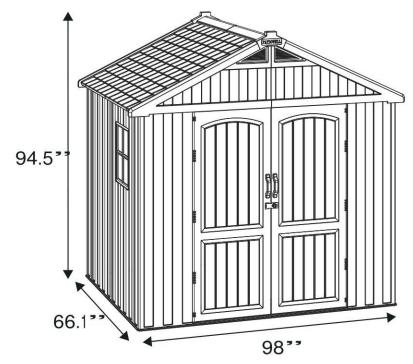



Before installation, please measure the ground with a tool and make sure the ground is level before installation.

BEFORE STARTING ASSEMBLY


Remove all of the pieces from the 5 packages and spread them out on the ground. Before installation, please check the type and quantity of parts first.

It is recommended to use a clean work surface to spread the parts out and for pre-assembly steps. Review all instructions before you begin, continue to refer to instructions during assembly.

Be sure to follow all steps thoroughly.

Please prepare these components in advance at the beginning of each stage.

REQUIRED TOOLS

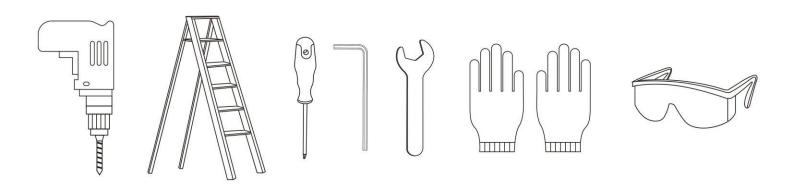


CAUTION

Some parts have steel edges. Please be careful when handling components. Always wear work gloves, eye protection and long sleeves when assembling or performing any maintenance on your shed. Do not attempt assembly on days with strong winds or low temperatures.




Requires two people and takes 2-3 hours for Installation. Recommended to wear gloves to avoid scratches. Please read the manual carefully before installation.


FLOOR PARTS

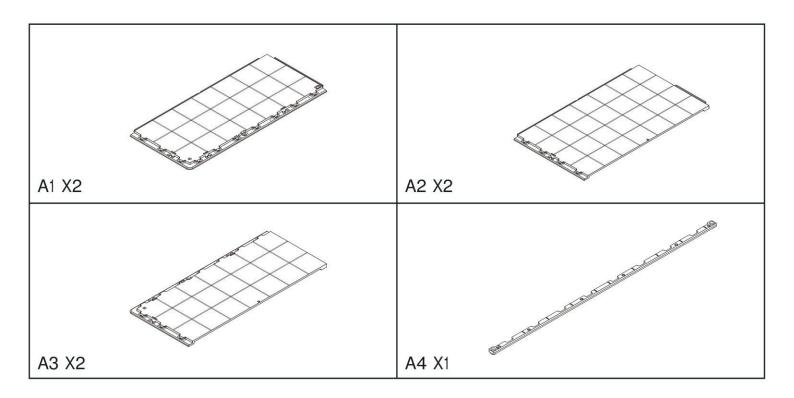


WALL PARTS

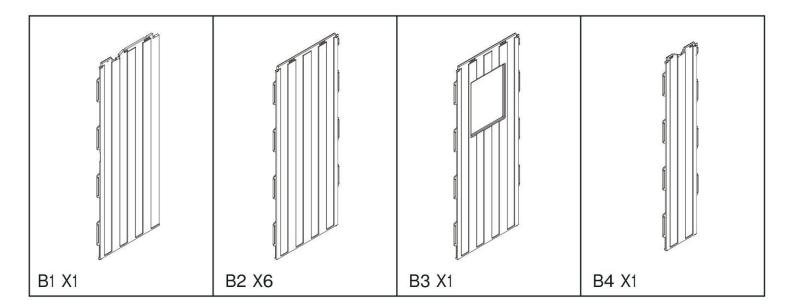


WALL PARTS

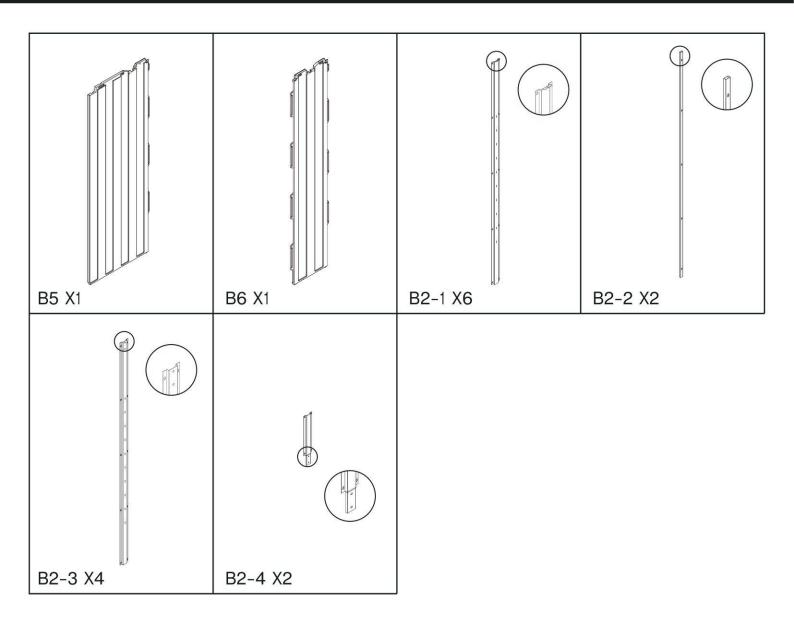


WINDOW PARTS

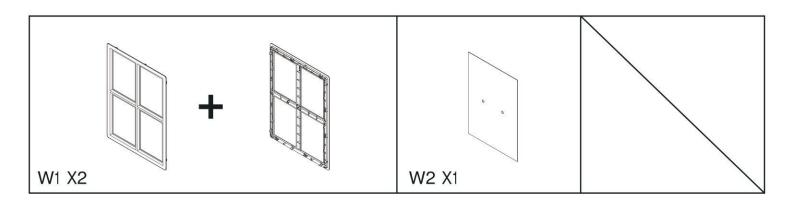

ROOF PARTS

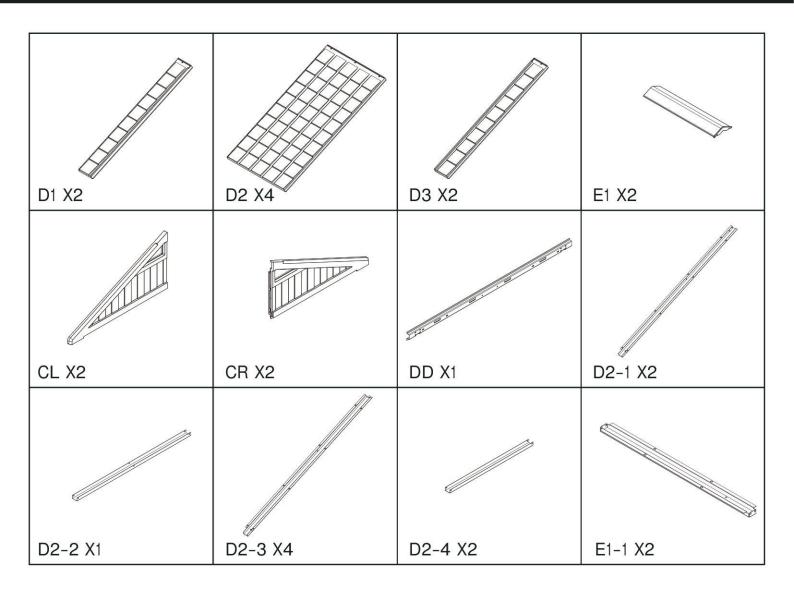


DOOR PARTS

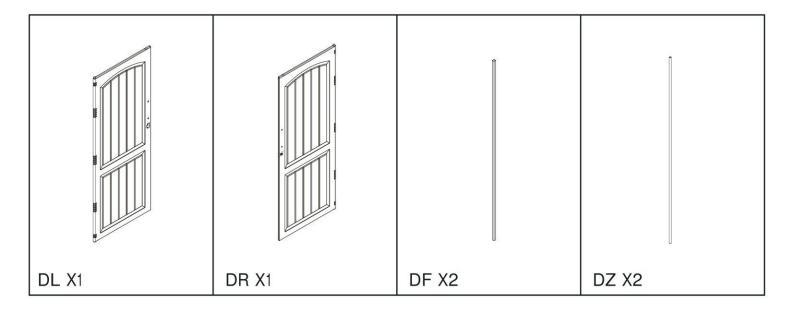

ACCESSORIES


		\Rightarrow	+ ∞ (X7)
DH1 X2	DH2 X2	DG X2	DS X1
		PATIOWELL	
DC X1	DDZ X2	E3 X2	E4 X1
CRI X2	CLI X2	D4 X16	A5 X2
A1-1 X1	B1-1/B5-1 X1	M6 X25	Z8 X6


SCREW

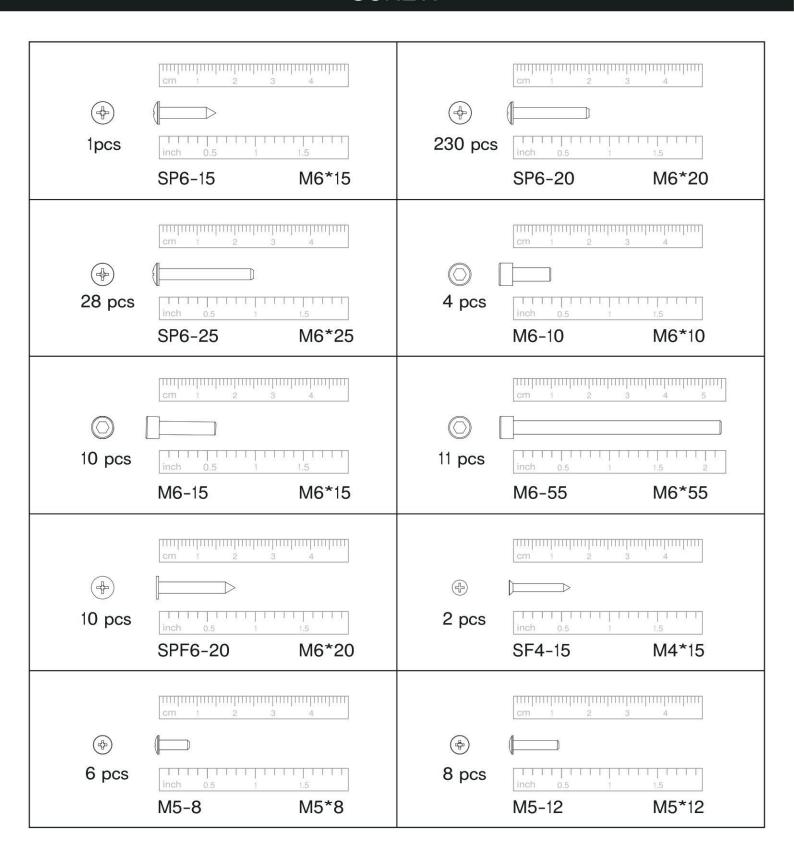



CONTENTS


Floor Part Instruction	10-14 (page)
Wall Part Instruction	14-25 (page)
Roof Part Instruction	25-34 (page)
Door Part Instruction	35-39 (page)

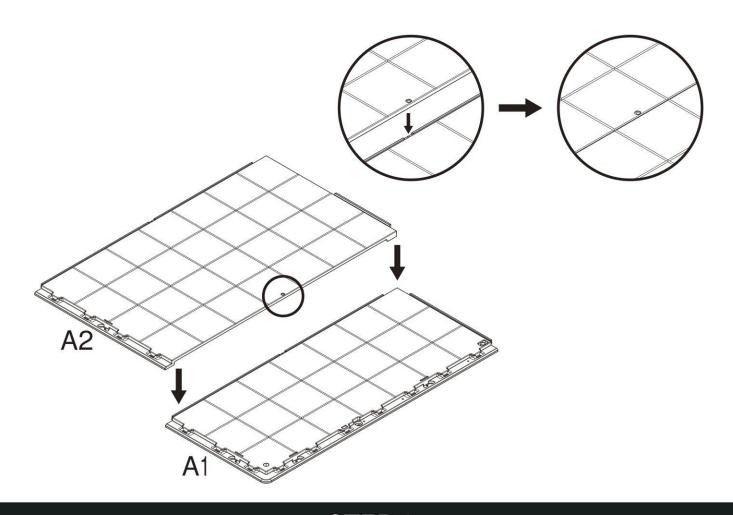


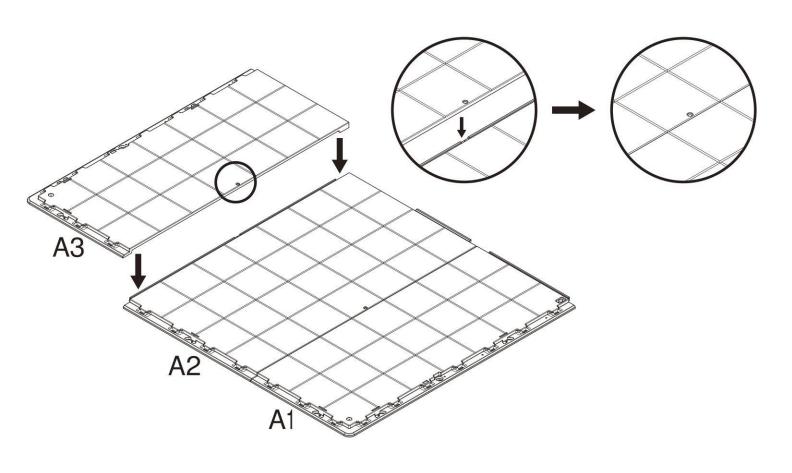


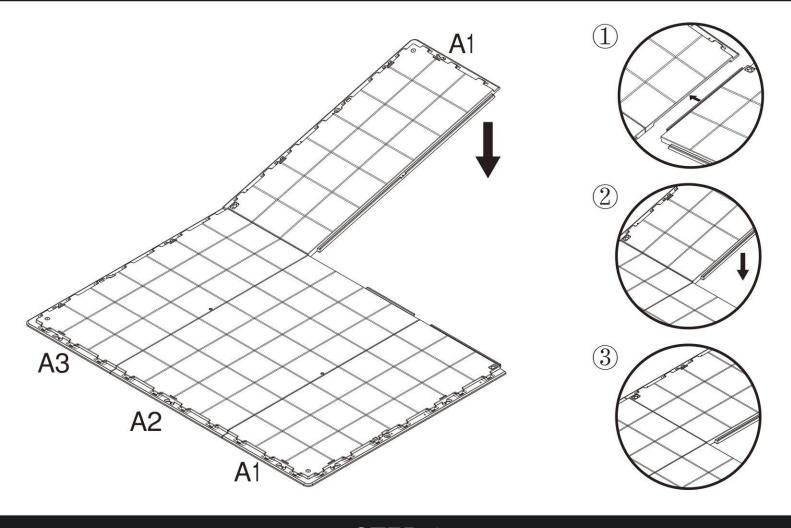


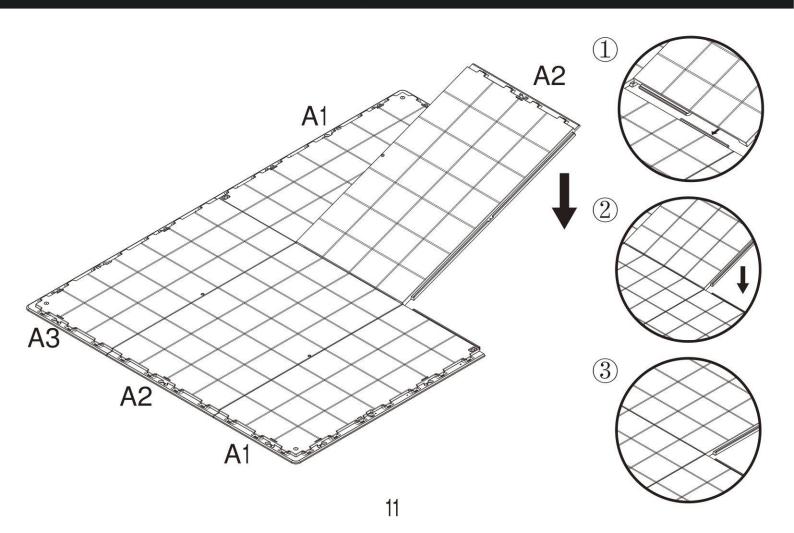


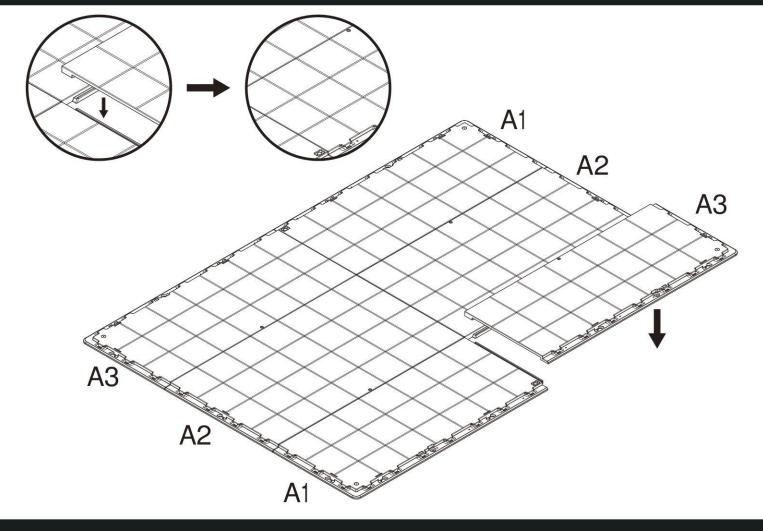


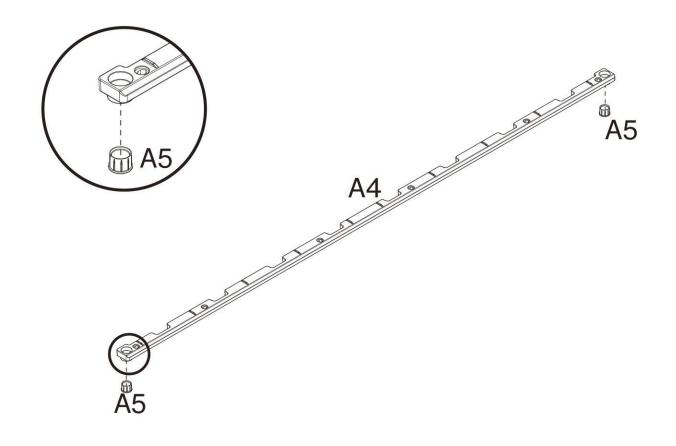


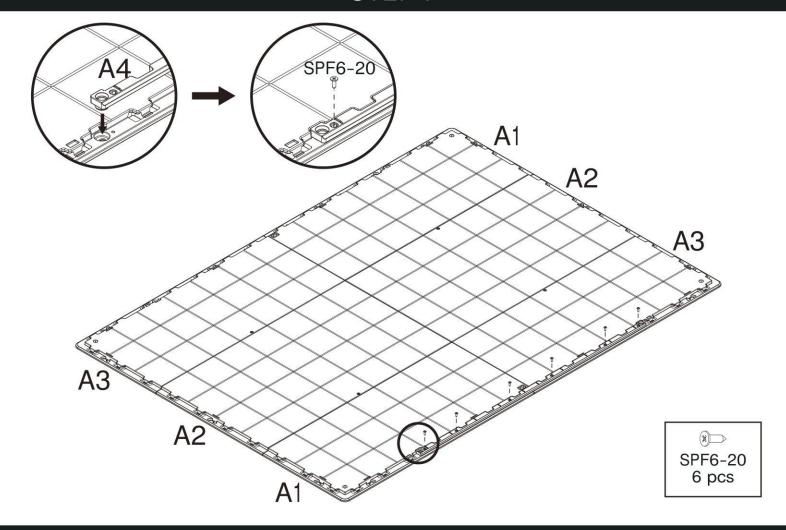


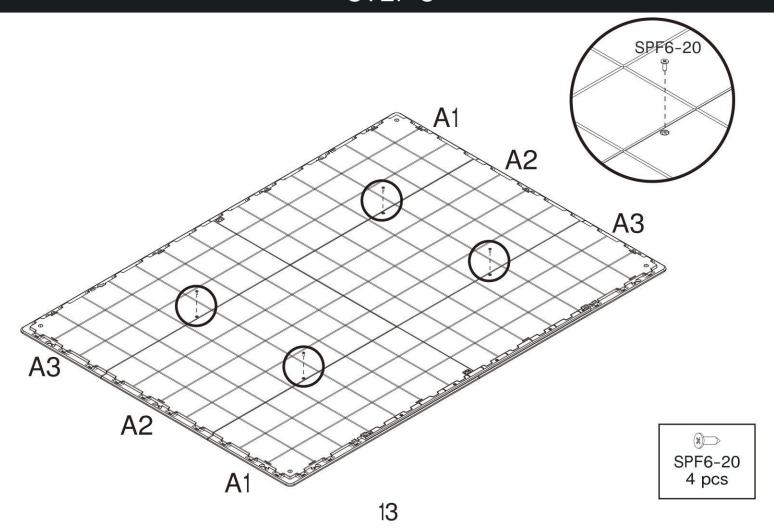


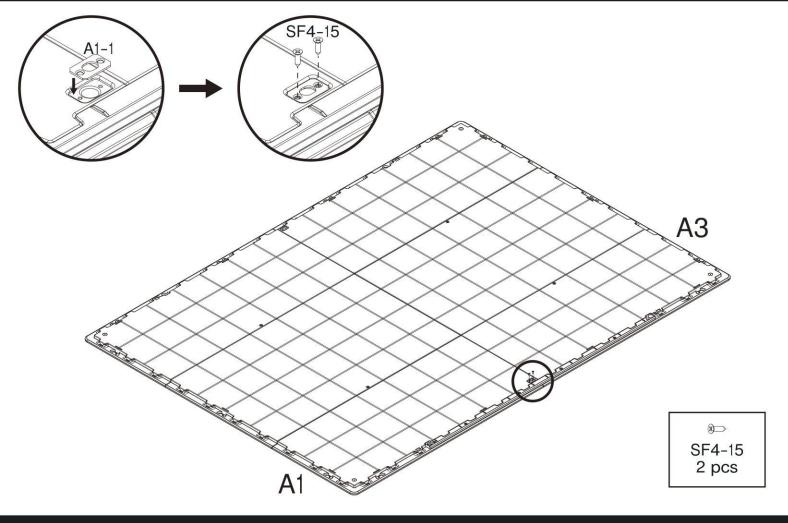


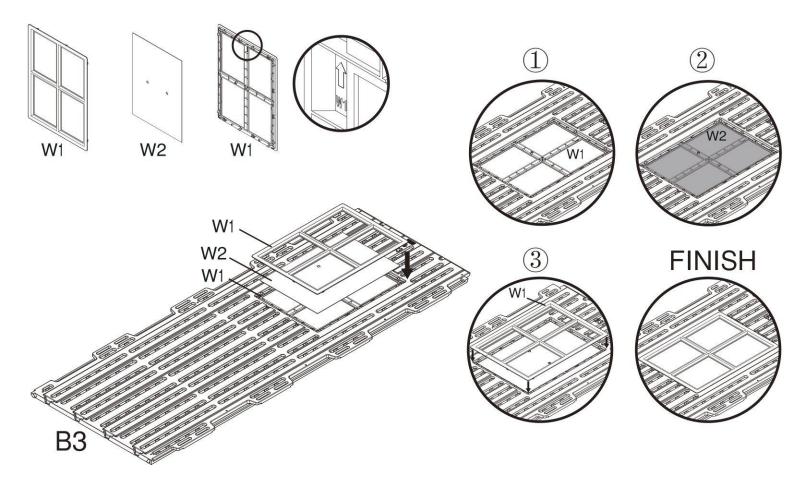


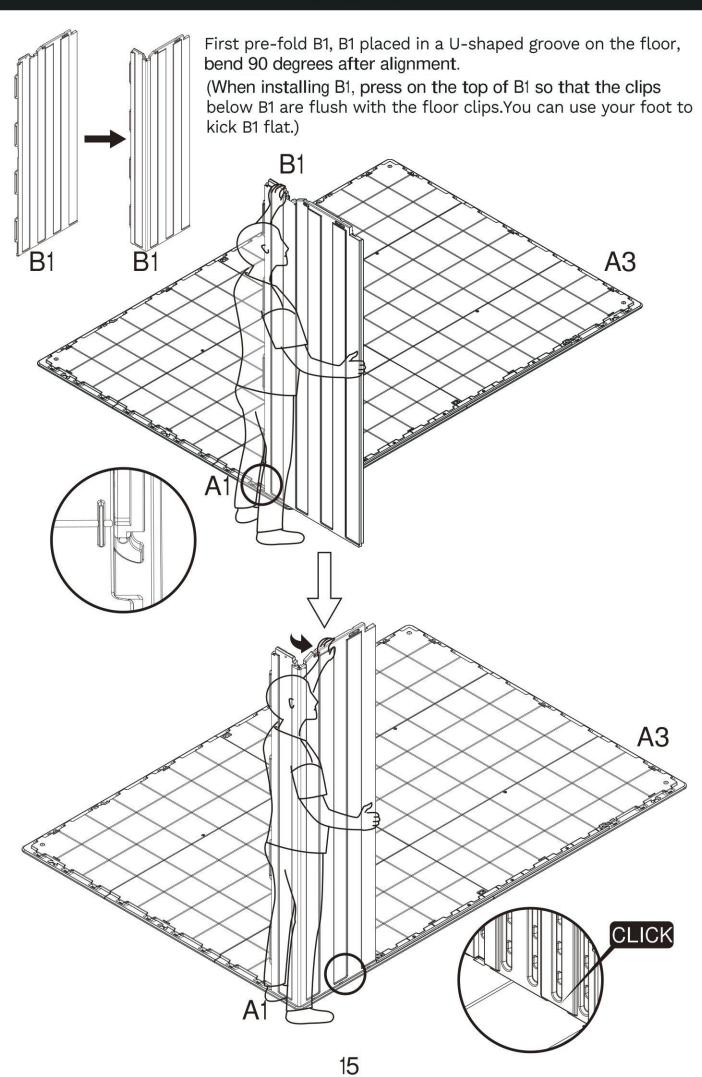


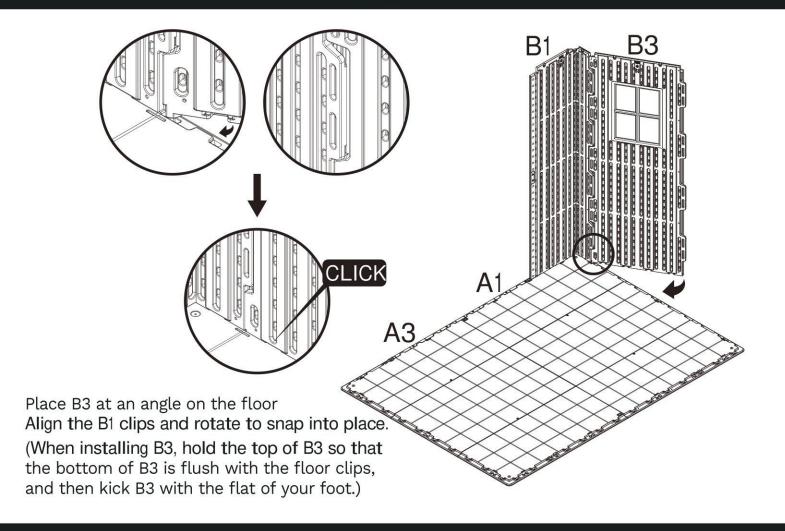


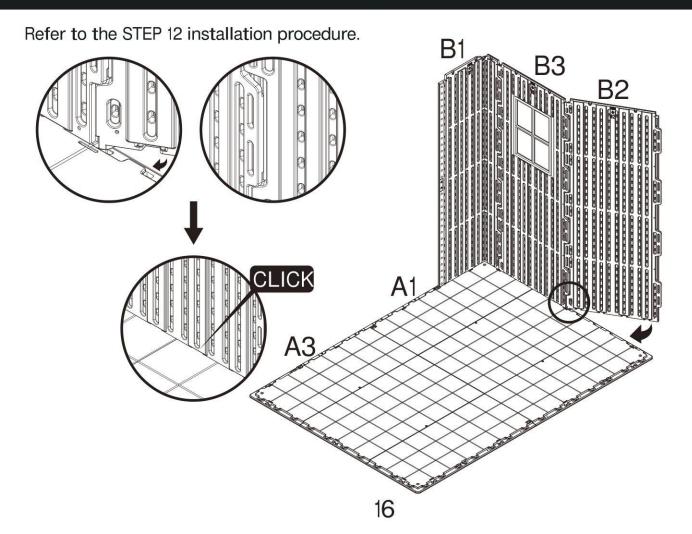


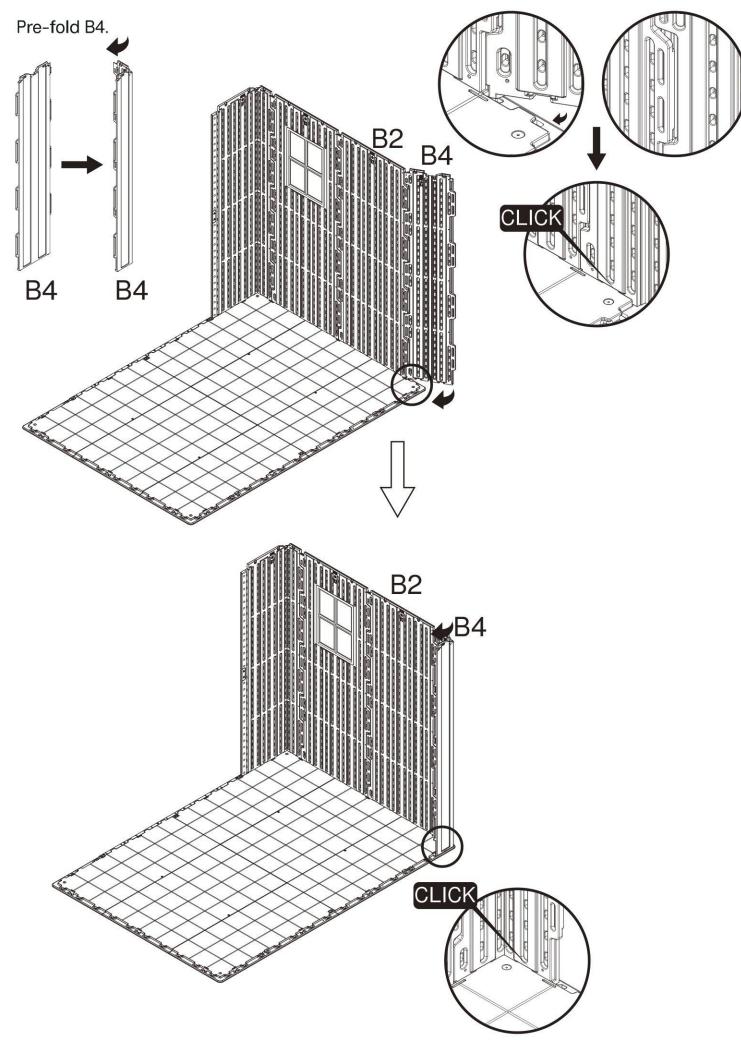


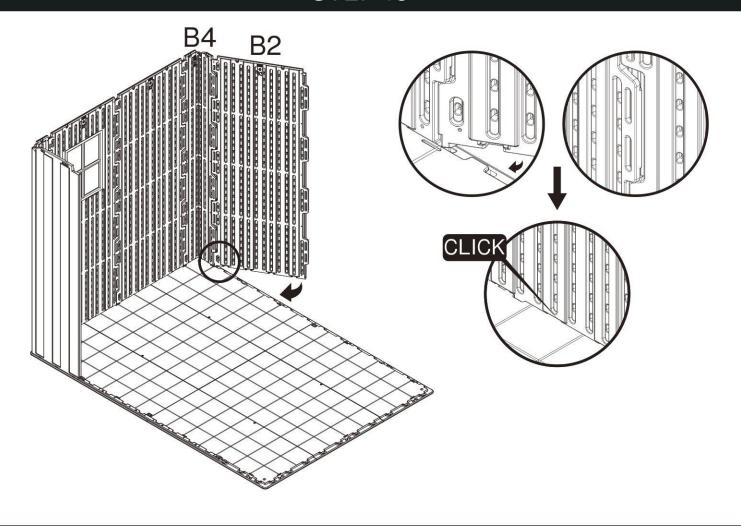


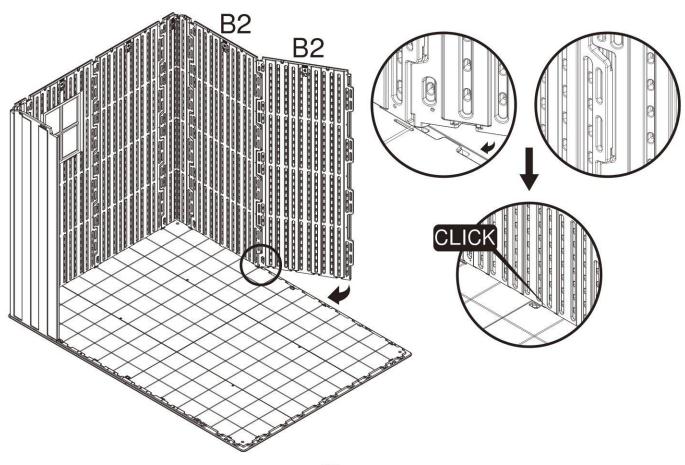


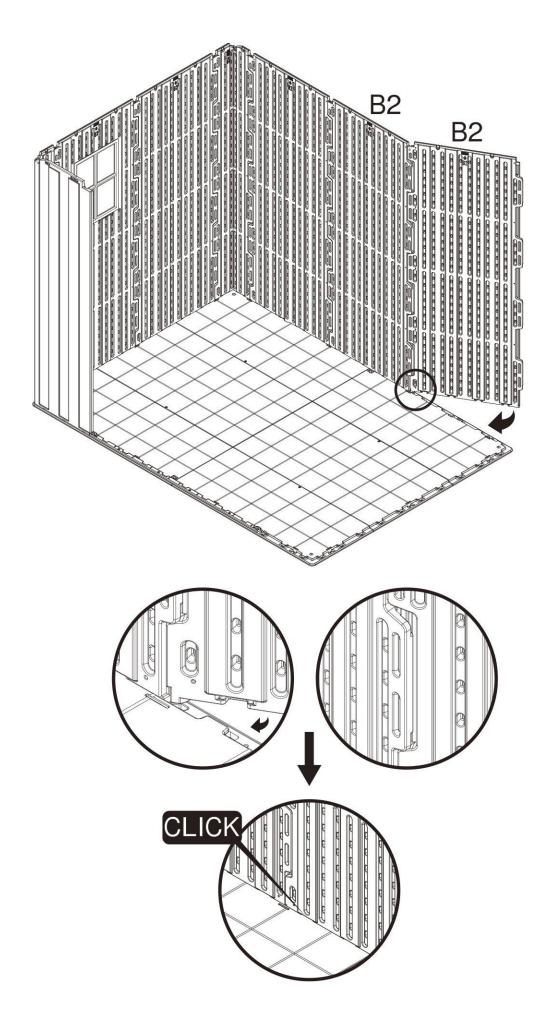


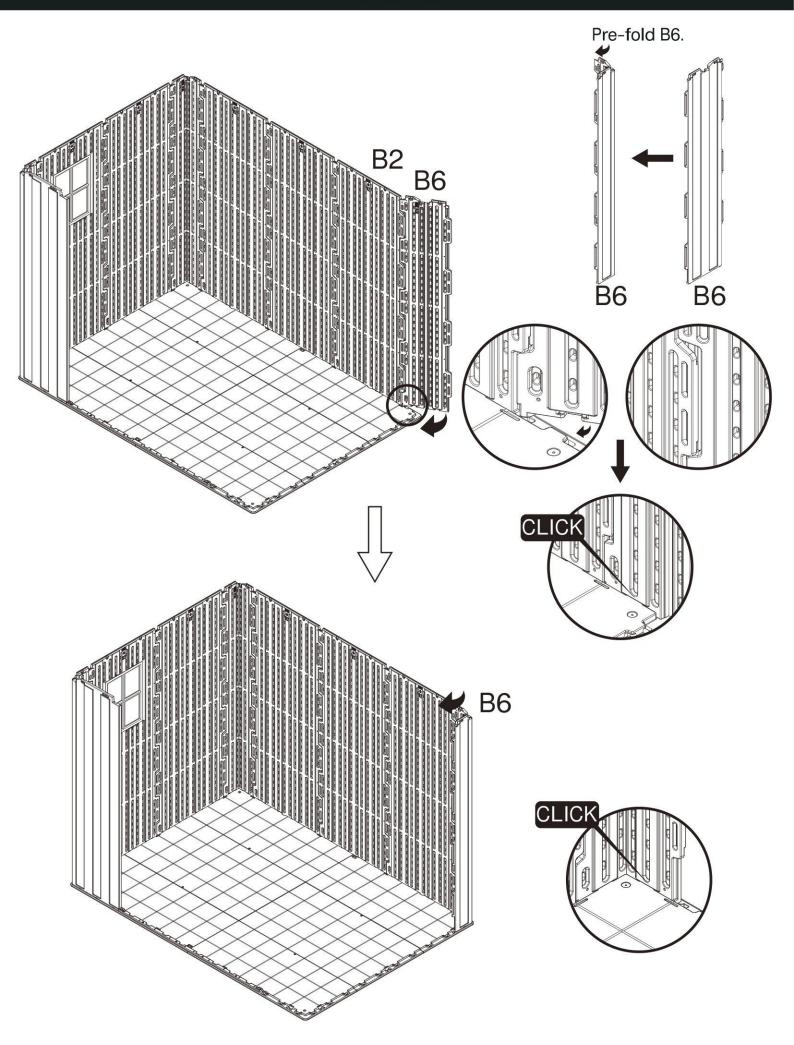


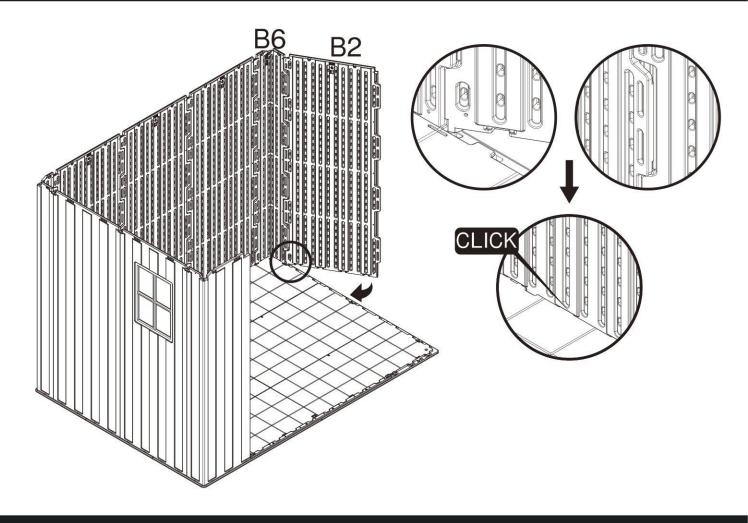


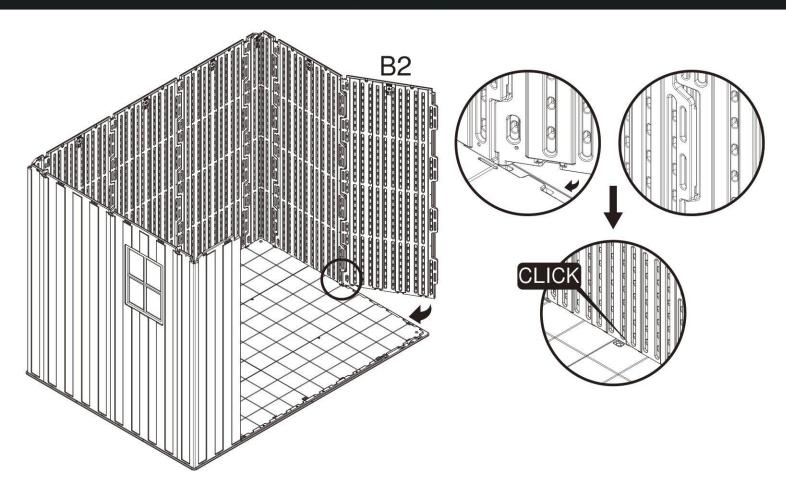

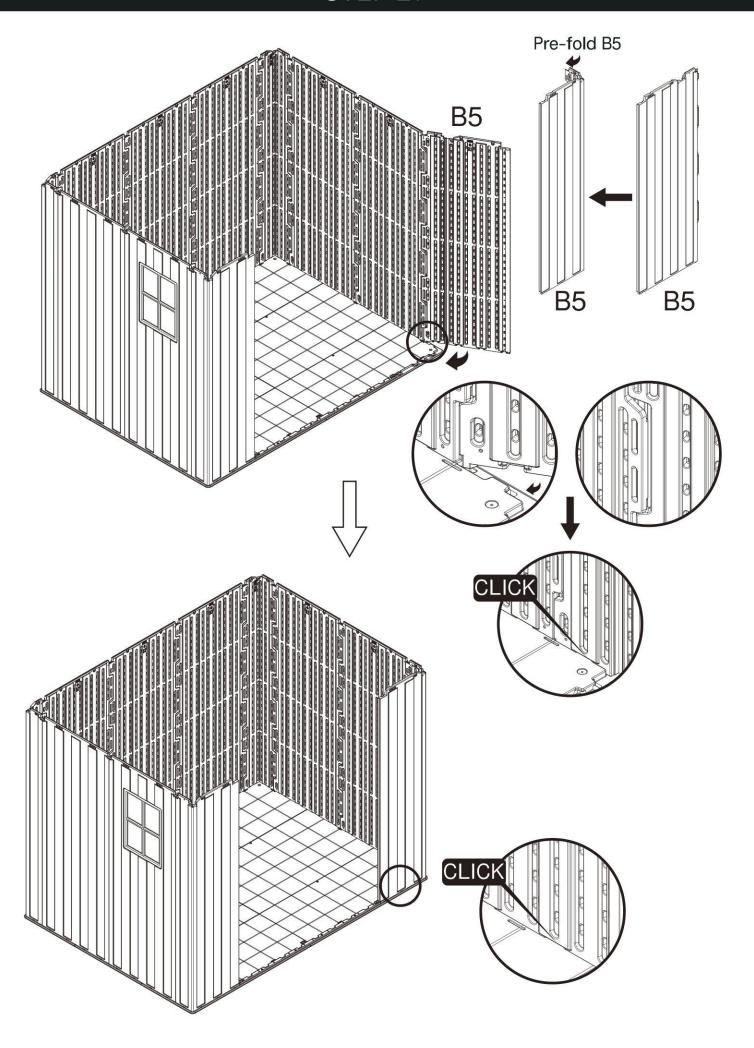


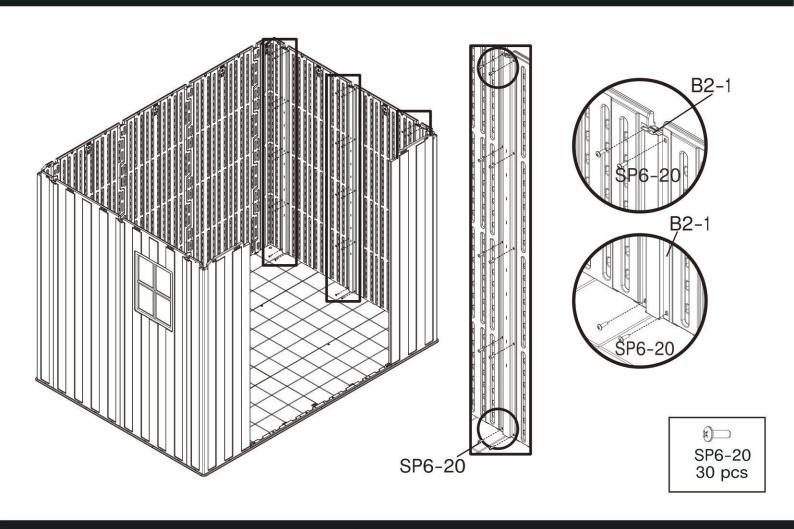


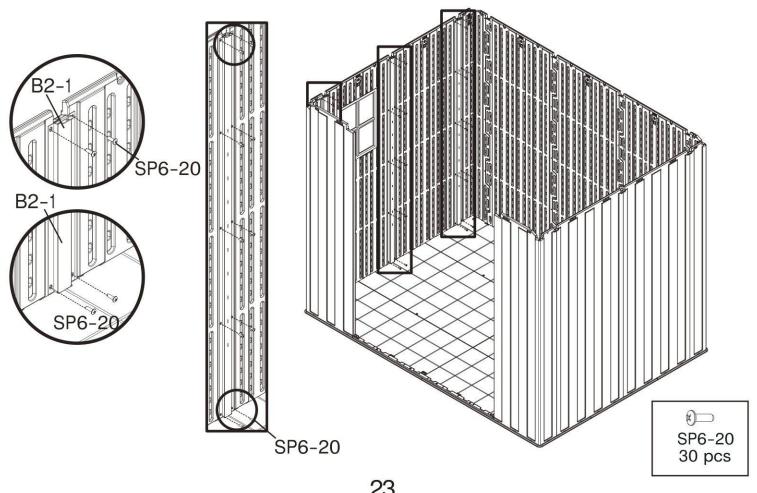


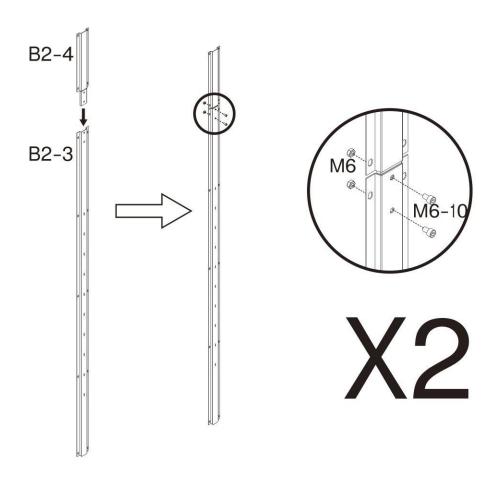



M6-10M64 pcs4 pcs

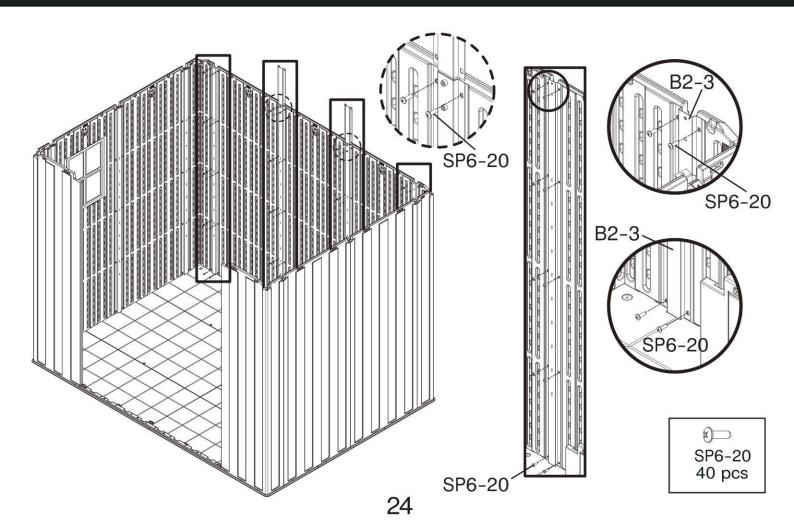


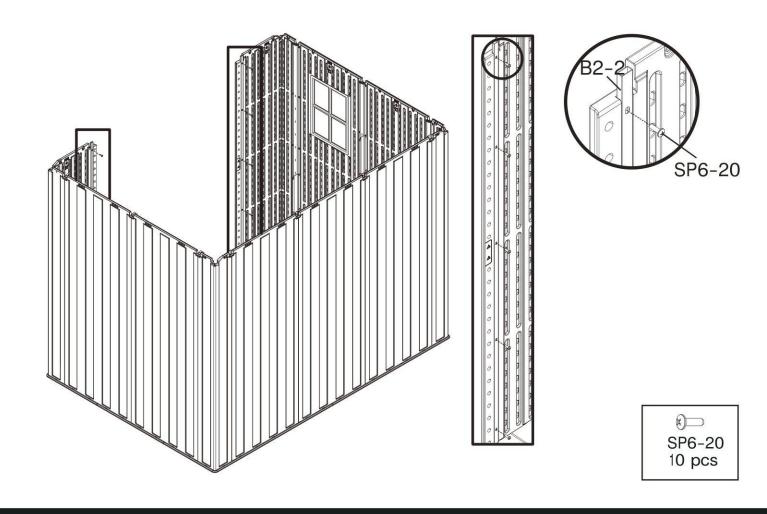


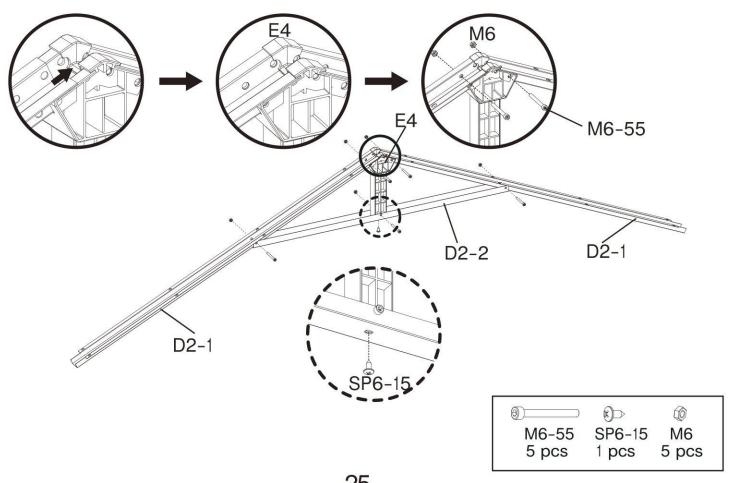

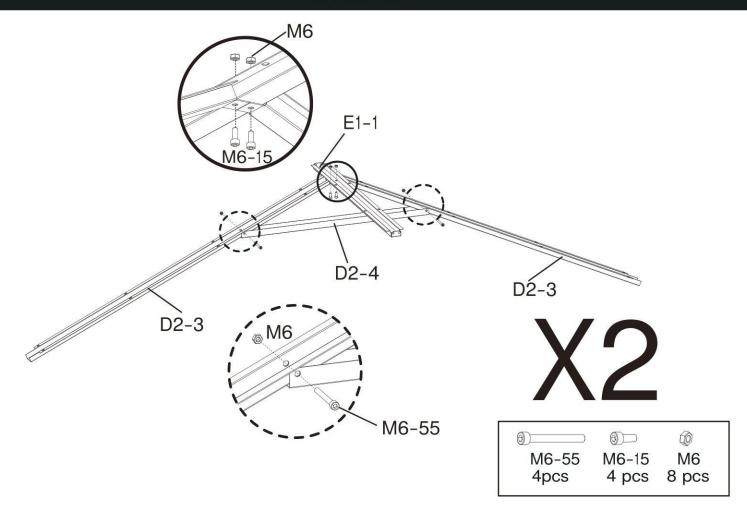


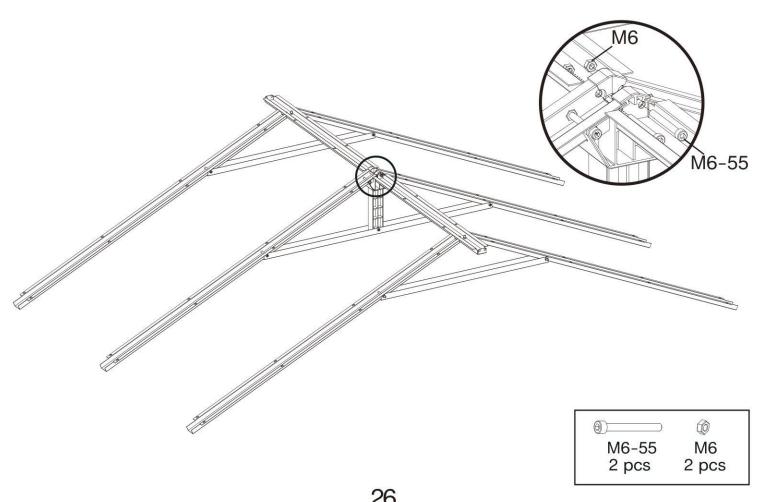


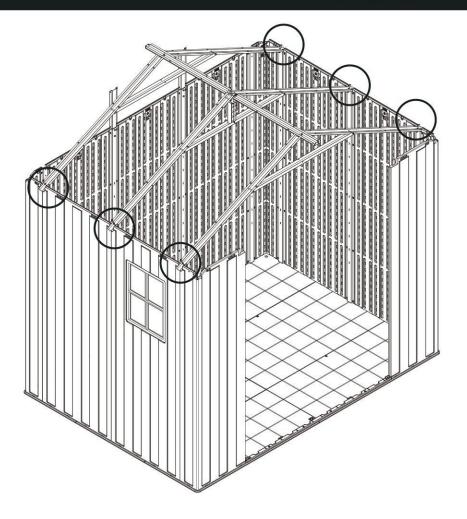




M6-15M6 Z86 pcs6 pcs6 pcs

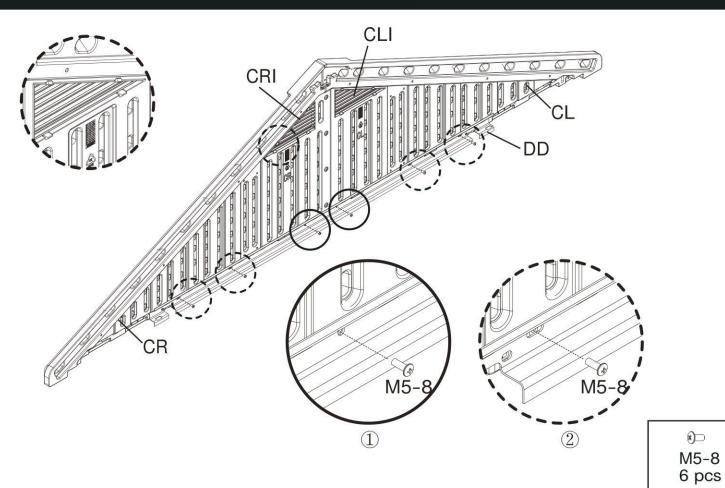

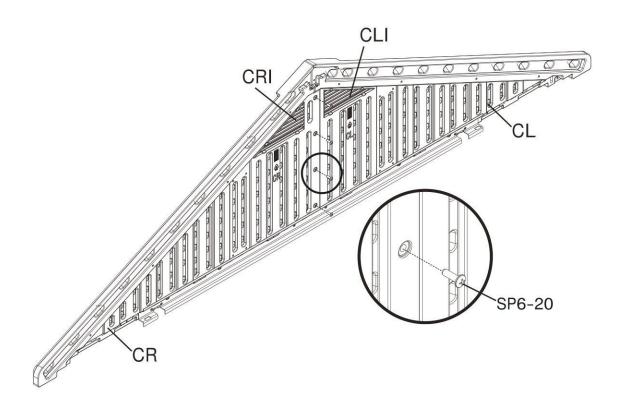






STEP 33

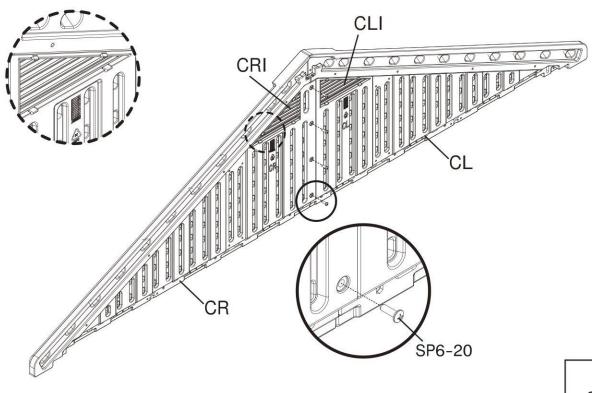



SP6-20 4pcs

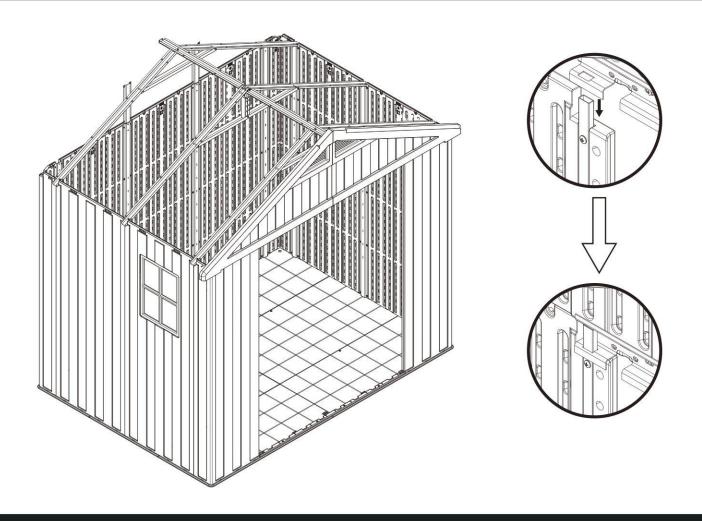

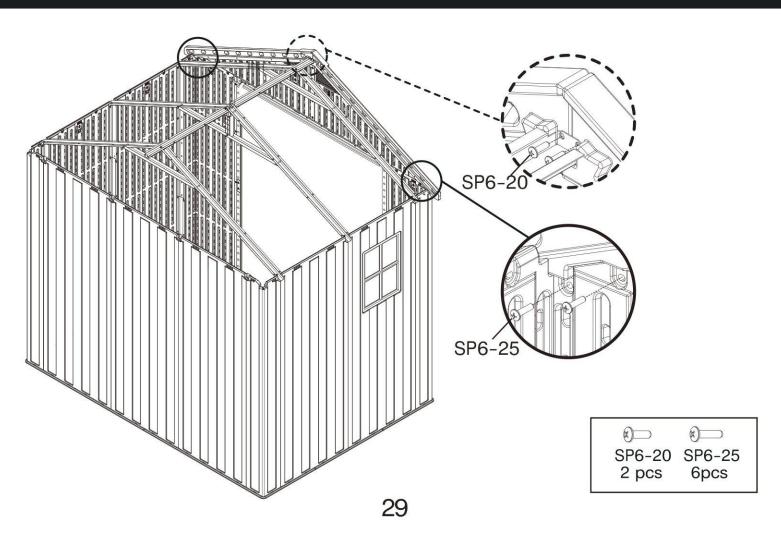

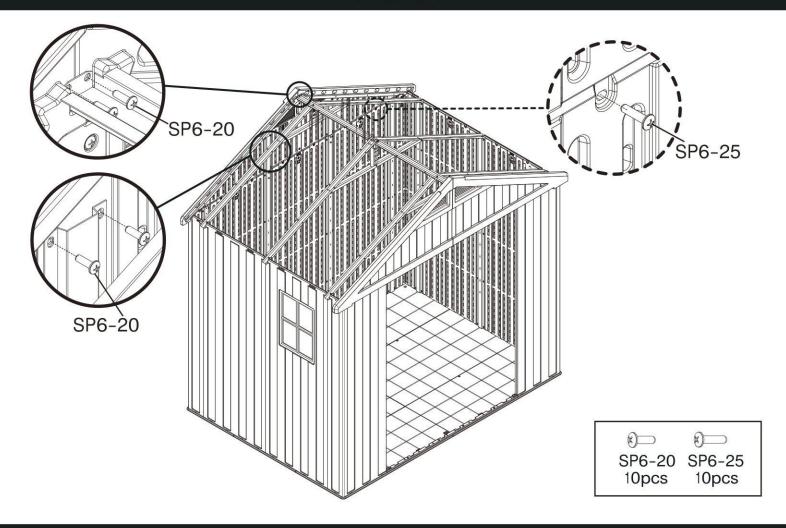


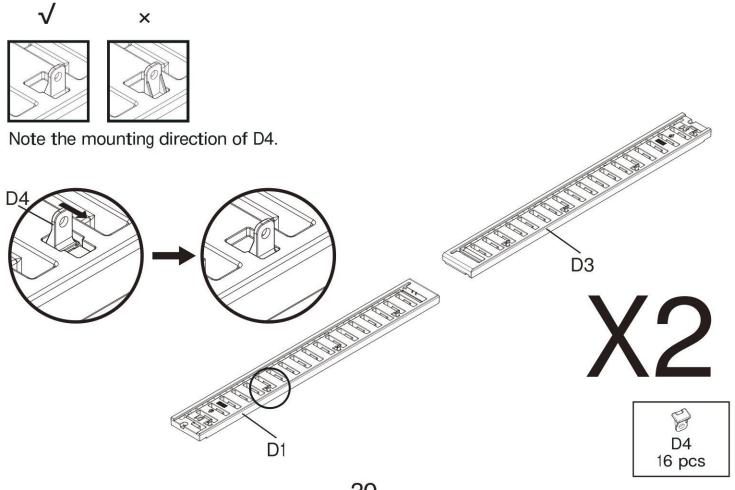

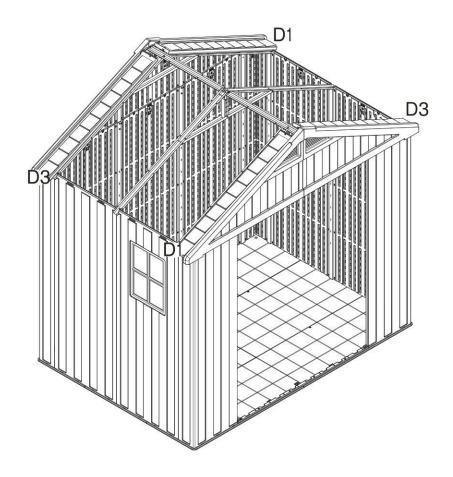





D1 and D3 are placed in the grooves of the iron frame, aligned with the grooves of the DL DR respectively and pushed forward.

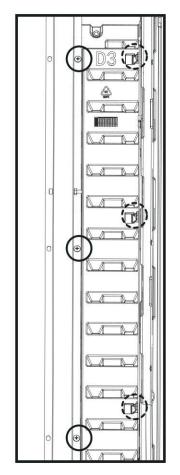











D4 should fit perfectly on the tripod.




SP6-20 32 pcs

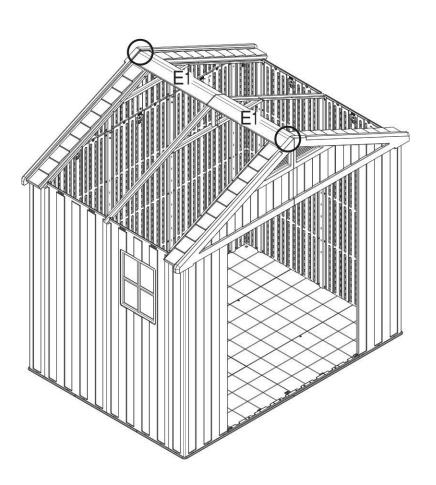




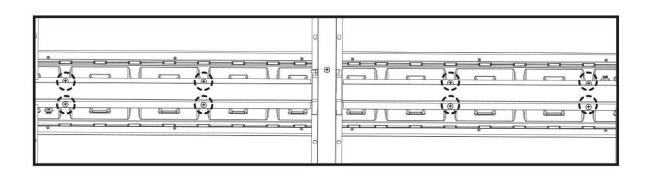





SP6-20 8 pcs

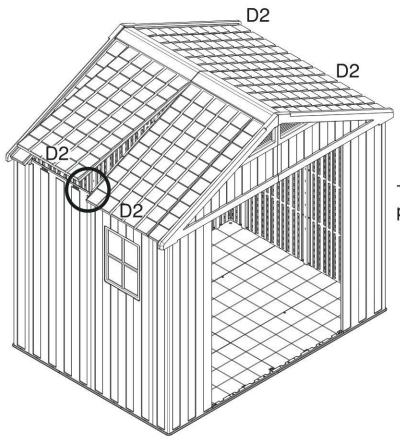





Tilt D2 into place, find the corresponding position and put it down.

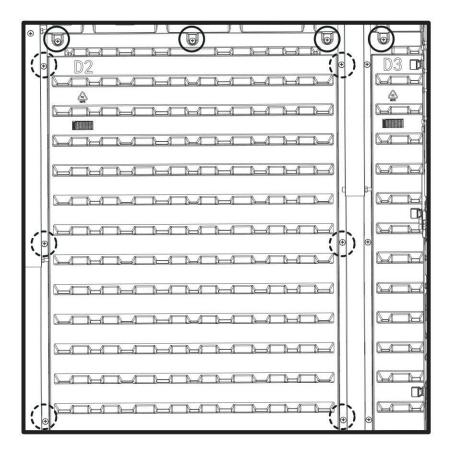








SP6-20 48 pcs

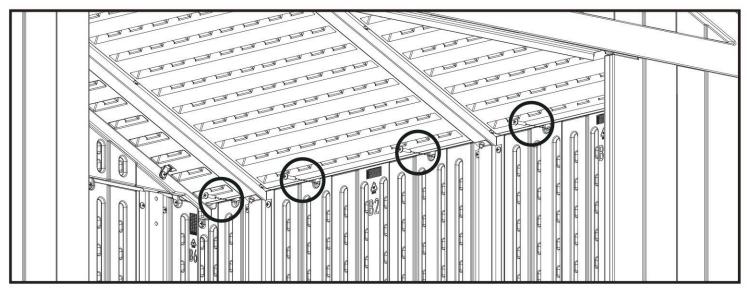








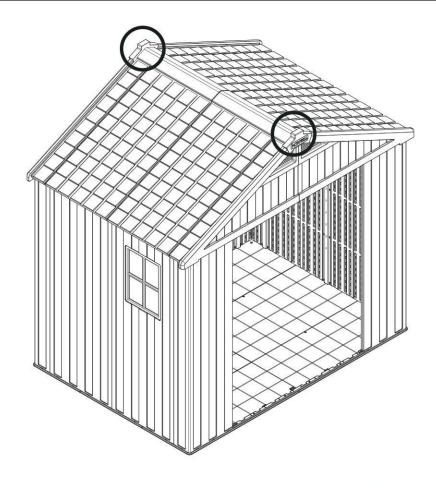



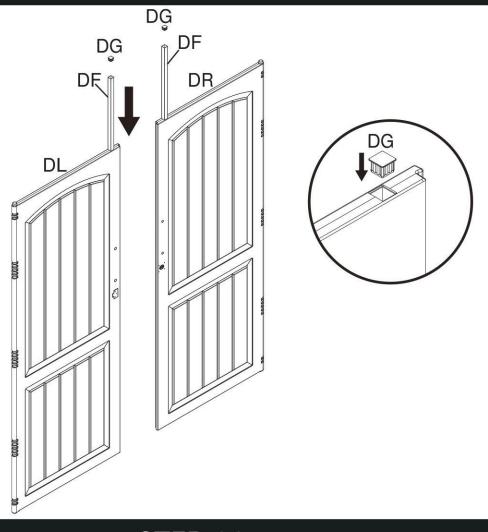


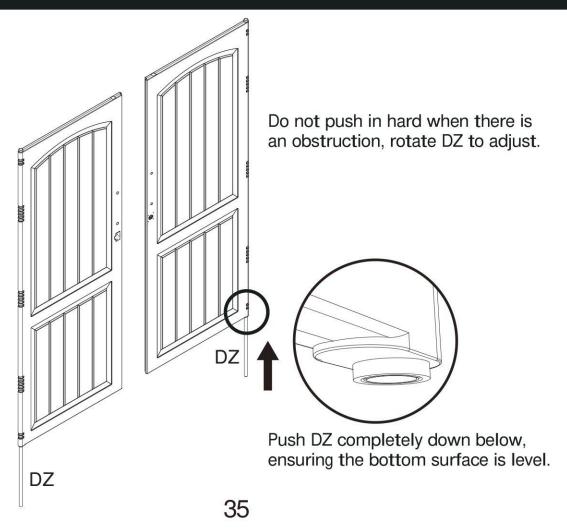


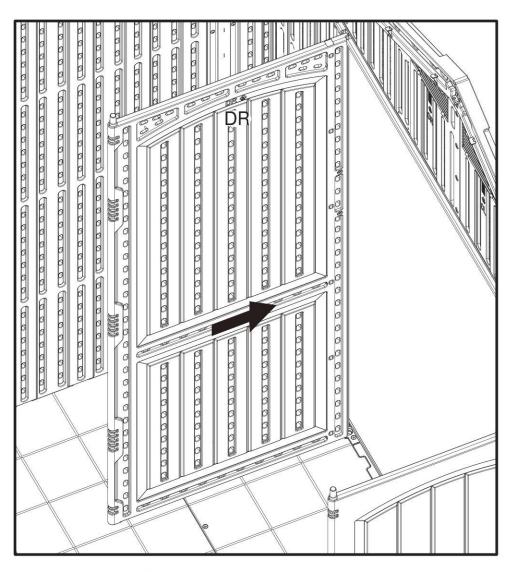




Take the DR and DL inside. Push it forward into position.







Push it into the groove of the floor. Press the DZ downwards.




Tilting the DR and DL and snapping it into the DDZ.




After inserting the DDZ, push the DR and DL to the fitting position.

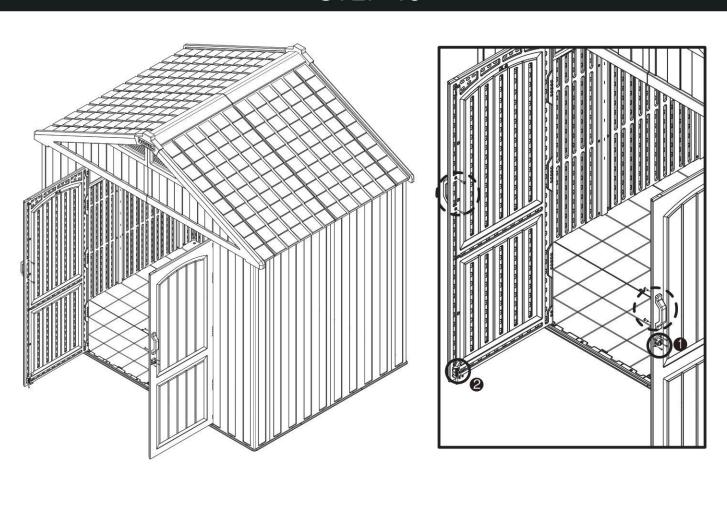


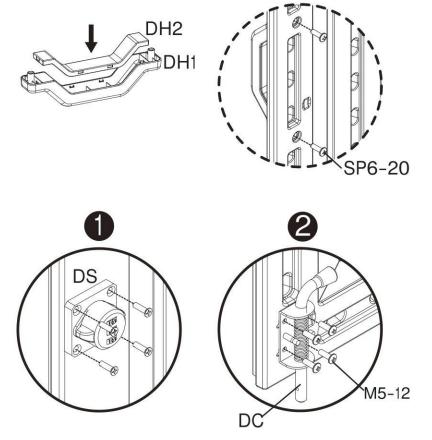


SP6-20 M5-12 4 pcs 4 pcs

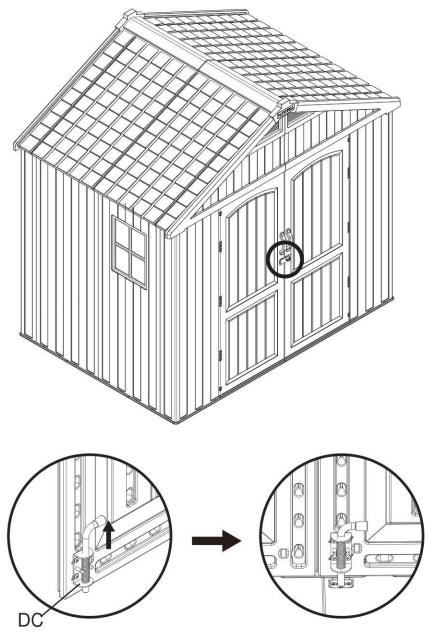


Remember to unplug the DC when closing the door and put it down when the door is closed.

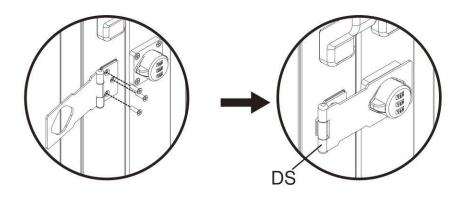

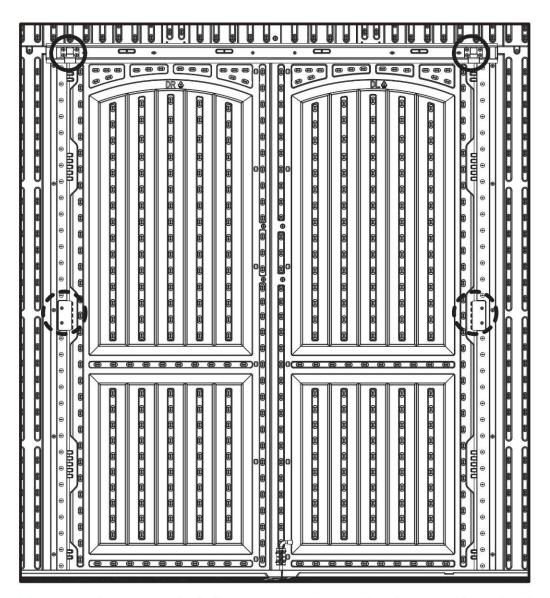

Two people are needed. One person closes the door and inserts the pin, while the other person adjusts the gap outside the door. After making sure the gap is even, the person inside installs DDZ screws SP6-20.

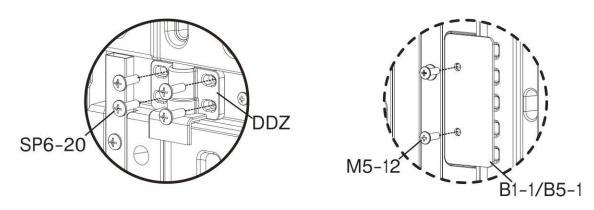

SP6-20 M5-12 8 pcs 4 pcs

CARE & SAFETY

- In case of fire, do not attempt to extinguish any burning polypropylene with water Unsuitable for storage of flammable or corrosive substances.
- It is of utmost importance to assemble all of the parts according to the directions.
 Do not skip any step.
- Please consult your local authorities if any permits are required to erect shed.
- Periodically check shed to assure that it remains stable and that the site remains level.
- It is highly recommended to secure the shed to an immovable object or to the ground by drilling holes in the floor at the pre-marked locations and inserting proper screws into the ground (size: 1.9"-3", screws are not included).
- Wear safety-goggles and always follow the manufacturer's instructions when using power tools.
- Wash shed with garden hose or a mild detergent solution. Using a stiff brush or abrasive cleaner could damage shed.
- Hot items such as recently used grills, blowtorches, etc. must not be stored in the shed.
- Heavy articles should not be leaned against the walls, as this may cause distortion.
- Keep roof clean of snow and leaves. Heavy amounts of snow on roof can damage the shed making it unsafe to enter.
- Although wind direction varies, it is an important factor when taking into account where to place your shed. Therefore, it is recommended to reduce wind exposure of the shed in general, and the door side in particular.
- Keep doors closed and locked to prevent wind damage.
- Do not stand on the roof.