

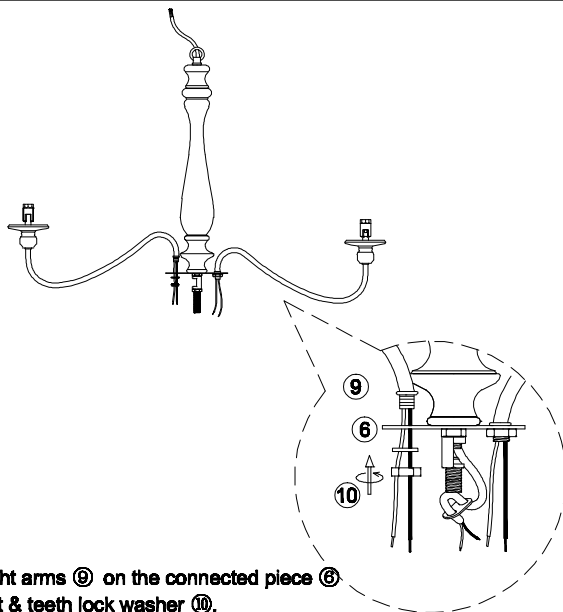



1. Let the main wire of the light fixture go through the threaded rod ②, rotate to fix threaded rod ② on the connected piece ⑥, lock it with grub screw ④ by hex key ⑤.
2. Let the hanging vase ③ go through the threaded rod ②, lock it with hanging ring ①.

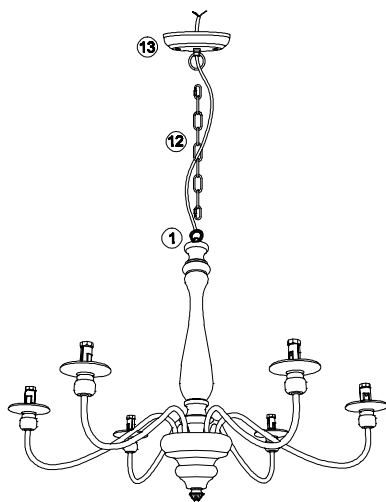

3. Install the light arms ⑨ on the connected piece ⑥ with lock nut & teeth lock washer ⑩.

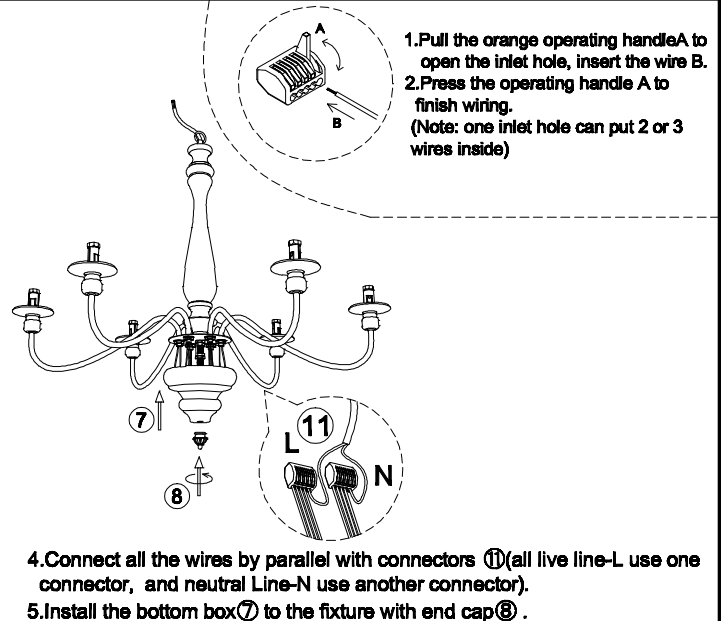

6. Connect the light fixture with canopy ⑬ with chain ⑫, let the wire go through the chain ⑫ and canopy ⑬.

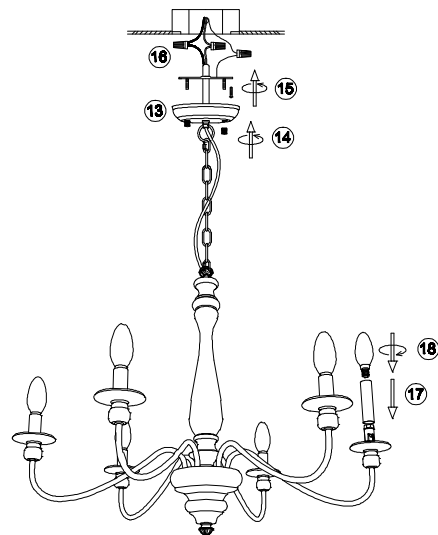

7. Install the bracket to the ceiling junction box with screw ⑮.
8. Connect the wire to your home line.
9. Install the fixture to the bracket with cap nut ⑭.
10. Put the cylinder tube ⑰ on the bulbholder and install the bulbs ⑱.

D5037-6 / D5037-8

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !