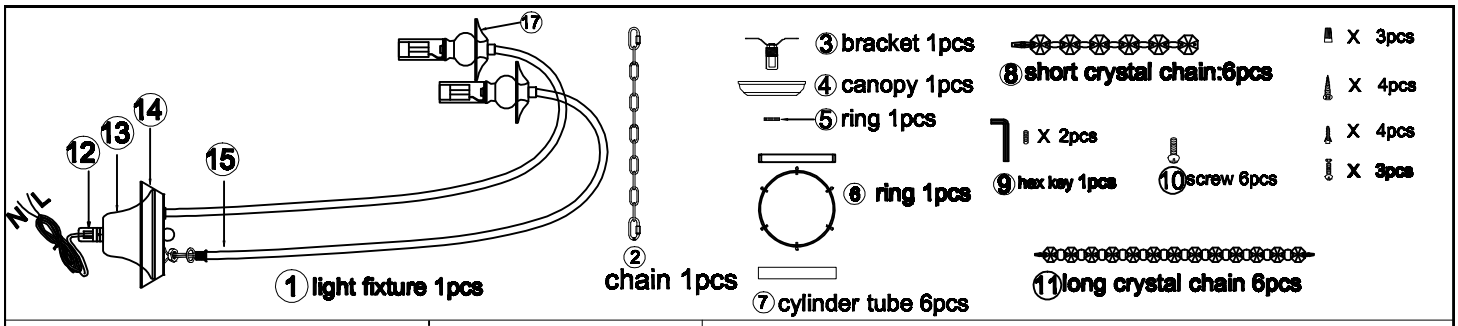

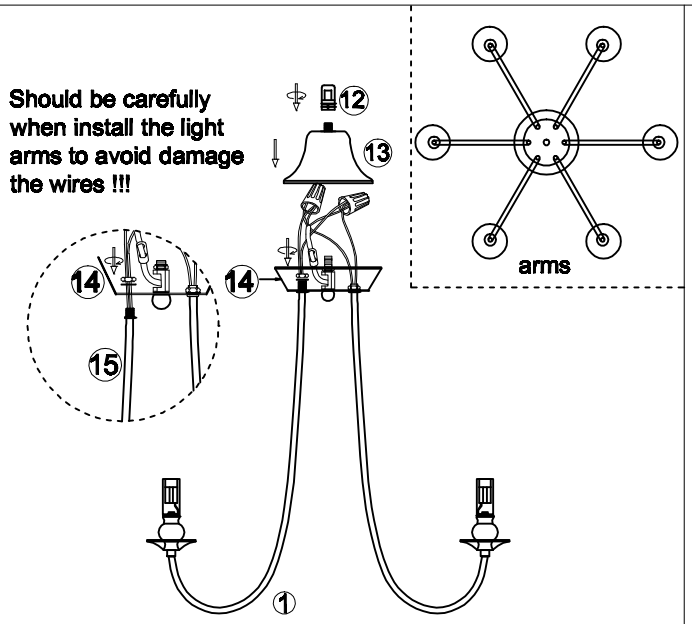

1.Loosen the ring ⑫ to remove out the top cover ⑬, fixed the light arms ⑮ to the connected box ⑭ with lock nut & teeth lock washer, after that put the cover ⑬ on the connected box⑭, rotate the ring ⑫ to make it tighten. (Should be carefully when install the light arms to avoid damage the wires !!!)
2.Adjust the light arms⑮to suitable position like picture showed. (if the arms loosen, please back to step 1 to fixed it with lock nut.)

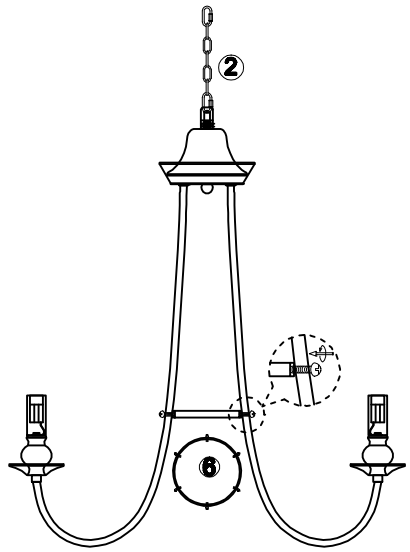

3.Remove out the screws of ring ⑥, install the ring ⑥ to the light arms with screw ⑩.
4.Hang the chain ② to the fixture, let the wire go through the chain ②.

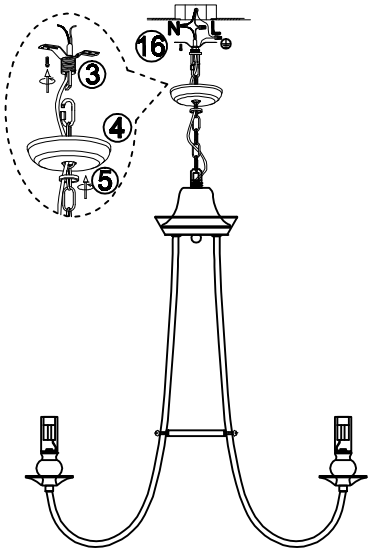

5.Install the bracket③ to the ceiling junction box with screw.
6.Let the wire and the chain② go through the ring⑤ and canopy④, hang the fixture to the bracket③ with chain②.
7.Connect the wire to your home line with cap connectors ⑯.
8.Push the canopy④ up to the bracket ③ and lock it with ring⑤.

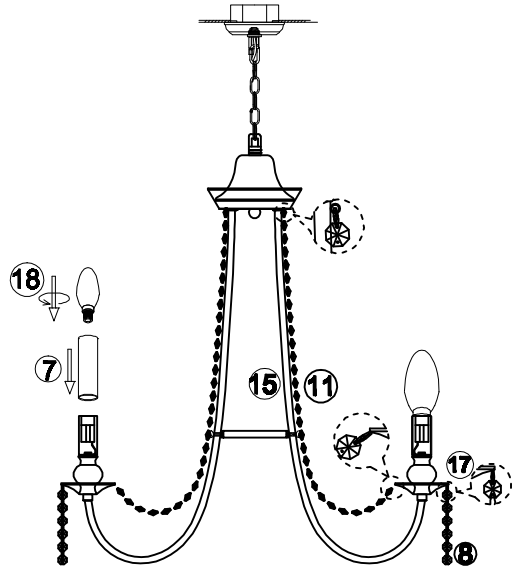

9.Hang the long crystal chain ⑪ from the mini hole of light arm ⑮ to dish ⑰.
10.Hang the short crystal chain⑧ to the dish ⑰.
11.Put the cylinder tube ⑦ to the bulb holder and install the bulbs ⑱.

ZJD00052-6

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !