

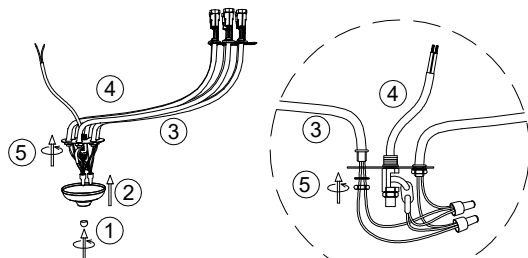


- X 1PCS
- X 1PCS
- X 3PCS
- X 3PCS
- X 3PCS




1. Install the arms ③ to the light fixture ④ with lock nut & teeth lock washer ⑤, install the bottom cover ② to the fixture ④ with end cap ①.
(Be carefully when install the arms to avoid damaged the wires!!!)




2. Adjust the arms ③ to right position like picture showed.
(If the arms not tighten enough, please back to step 1 to lock the nuts and washers again.)


Note: male (A) should connect with female (A)
male (B) should connect with female (B)
(C with C, D with D).

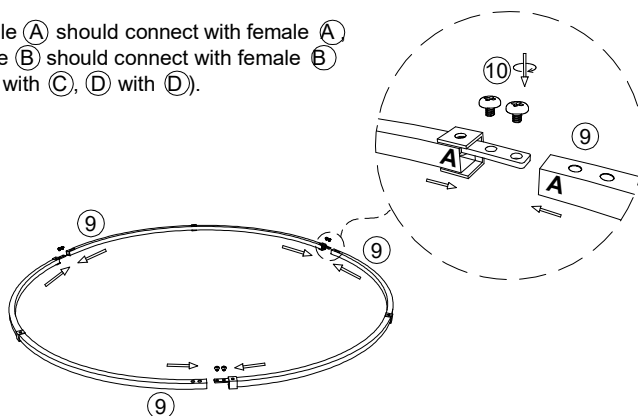


3. Assembled the split parts 9 to a completely ring fixture like picture showed, pushed the split parts together and fix with bolt screw ⑩.

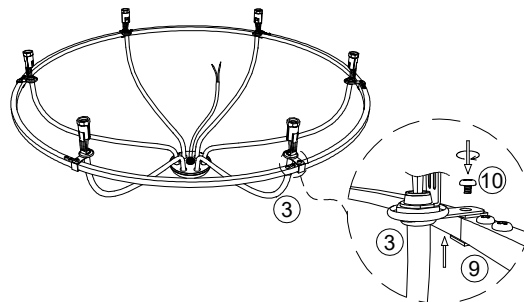

4. Put the ring 9 to the hook of the arms ③, adjust the position of the hole and fixed the ring ⑨ with screw ⑩.

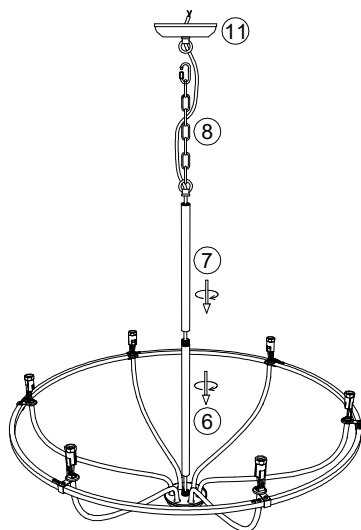

5. Let the wire go through tube ⑥ & ⑦ (depends on the demand height to use 1 or 2 tubes), rotate to fixture the tube to the fixture, let the wire go through the chain ⑧ and canopy ⑪, also rotate to fix to the fixture.

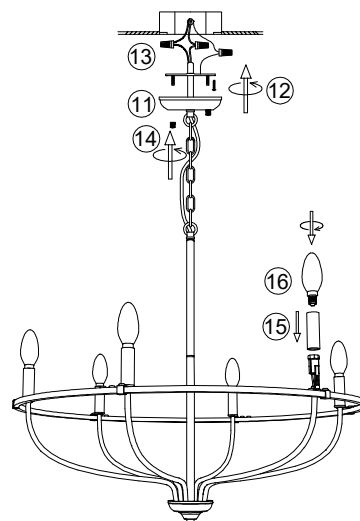

6. Install the bracket to the ceiling junction box with screw ⑫.
7. Connect the wire to your home line.
8. Install the fixture to the bracket with cap nut ⑭.
9. Put the cylinder tube ⑮ on the bulbholder and install the bulb ⑯.

D0150-6/D0150-8

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !