

ASSEMBLY INSTRUCTIONS




**CAUTION**


◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have residue during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture, if removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.


TOOLS REQUIRED




Ladder




Safety Goggles




Electrical Tape




Phillips Screwdriver



Flathead Screwdriver




Wire Cutter




Wire Stripper


HARDWARE INCLUDED




Fixture




Mounting Unit




Mounting Screws 1




Wire Nuts




Screws 2



Plastic buckle




Wire rope



Screws 3

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

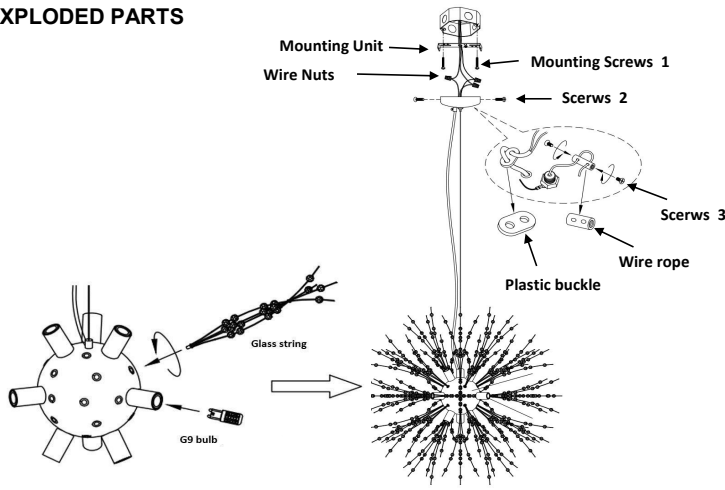

Labels in diagram: Mounting Unit, Mounting Screws 1, Wire Nuts, Screws 2, Screws 3, Plastic buckle, Wire rope, Glass string, G9 bulb.

INSTALLATION


**STEP 1**  
Unscrew the ball nut from the mounting unit.  
Use the mounting screws to attach the mounting unit to the junction box.

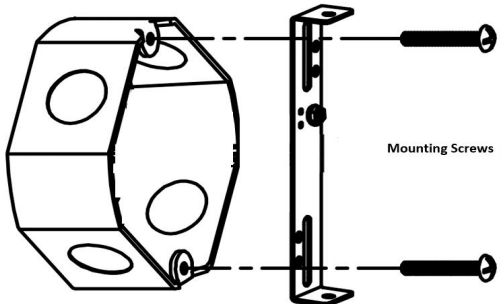

Labels in diagram: Mounting Screws 1.

STEP 2

Make the electrical connection from the junction box to the fixture.  
Connect the ground wire to the mounting unit using the preinstalled green ground screw.  
Then, connect the positive, negative and ground wires with the supplied wire nuts.  
Secure with electrical tape.

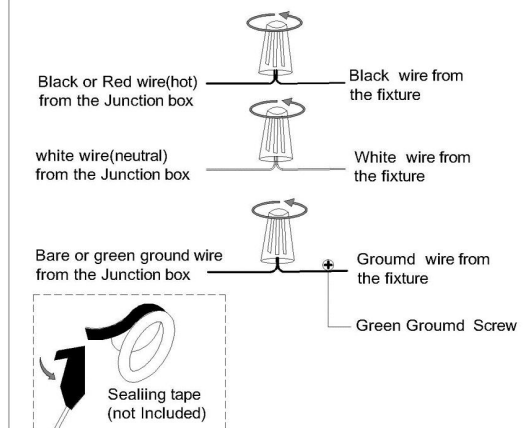

Labels in diagram: Black or Red wire(hot) from the Junction box, Black wire from the fixture, White wire(neutral) from the Junction box, White wire from the fixture, Bare or green ground wire from the Junction box, Ground wire from the fixture, Green Ground Screw, Sealing tape (not Included).

