







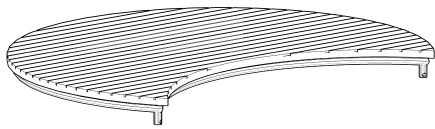


AX1		BX1		CX5
				
DX2		EX2		
				
HX10	IX10	JX1	Extra Hardware	
			HX2 IX2	

- Note:
1. Please do not tight any bolt unless all bolts are fixed at their respective places.
 2. After fixing the bolts tighten them simultaneously.
 3. Matching Parts Bolt (example AtoA)
 4. Two person assembly required.



Technical drawing of a curved metal frame assembly. The drawing shows two views of the frame, which consists of two curved horizontal rails connected by vertical supports. Callout J points to a curved metal bracket. Callout H points to a threaded rod. Callout I points to a flat washer. A circular inset shows a detailed view of the assembly where the bracket (J) is secured to the frame with the rod (H) and washer (I).

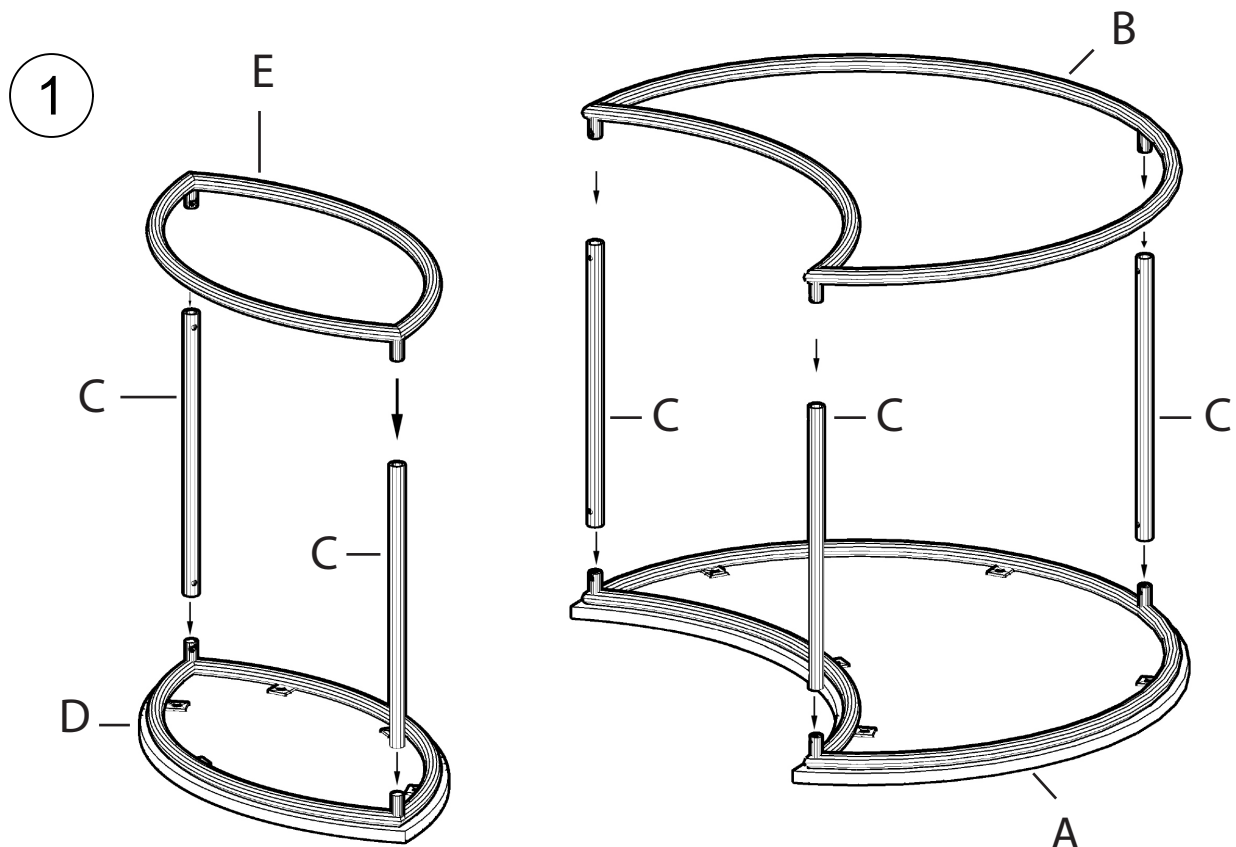