





Note: male A should connect with female A, male B should connect with female B (C with C, D with D).

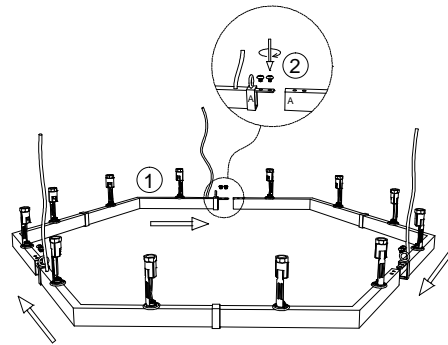

1.Combine the light fixture ① together and fasten it with screw ②.

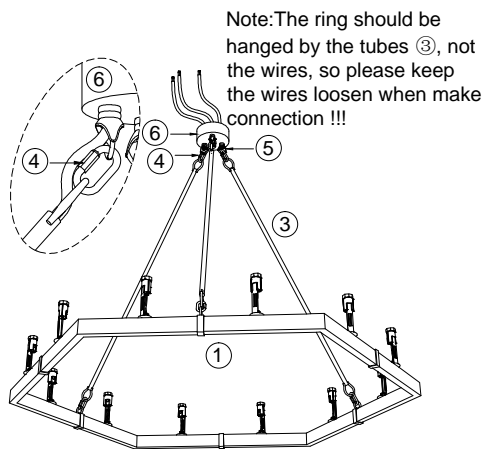


2.Let the wire go through the tube ③, hang the fixture to the junction box ⑥ with the carabiner hook screw connection ④ of hanging tube ③, let the wire go through the junction box ⑥.

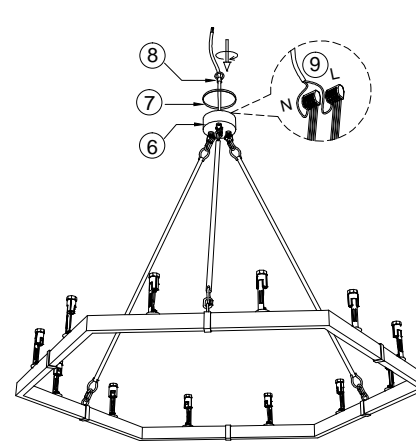


3.Connect all the wires by parallel with connectors ⑨ (all live line-L use one connector, and neutral Line-N use another connector).

4.Let the wire go through the top cover ⑦ and ring ⑧, rotate the ring ⑧ to close the top cover ⑦ to the fixture.

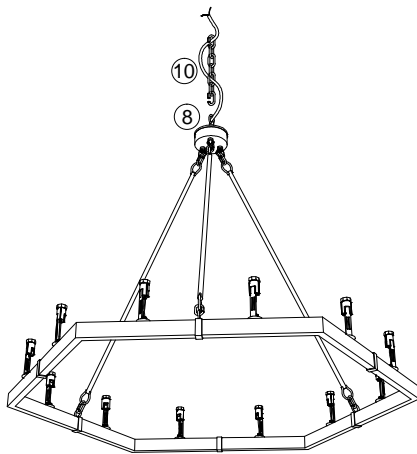

5.Hang the chain ⑩ to the fixture with ring ⑧, let the wire go through the chain ⑩.

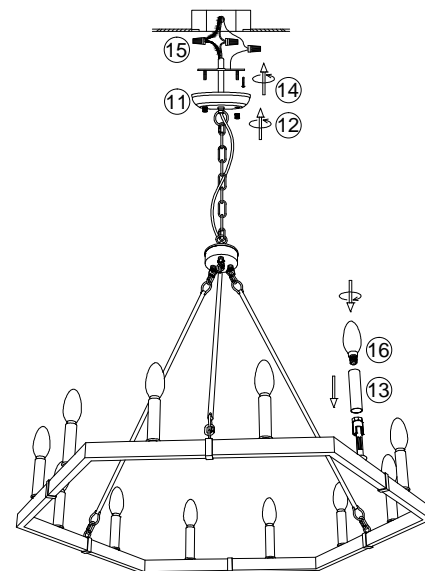

6.Install the bracket to the ceiling junction box with screw ⑭.

7.Connect the wire to your home line with cap connector ⑮.

8.Install the fixture to the bracket with cap nut ⑫.

9.Put the cylinder tube ⑬ to the bulb holder and install the bulb ⑯.

D0157-12/D0157-16

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !