




1. Rotate to remove out the hanging ring ③, bell shape cover ④, hanging ball ⑤, top cover ⑥.

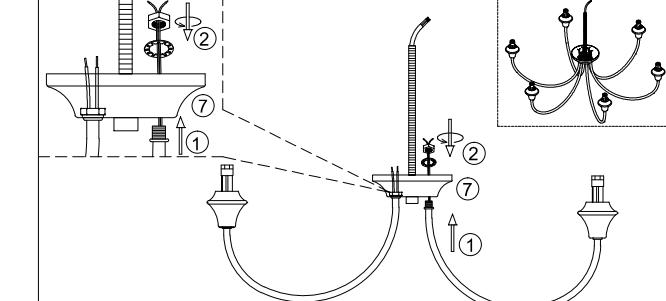


2. Install the light arms ① to the bottom ⑦ with lock nut & teeth lock washer ②, adjust the light arms to suitable position.

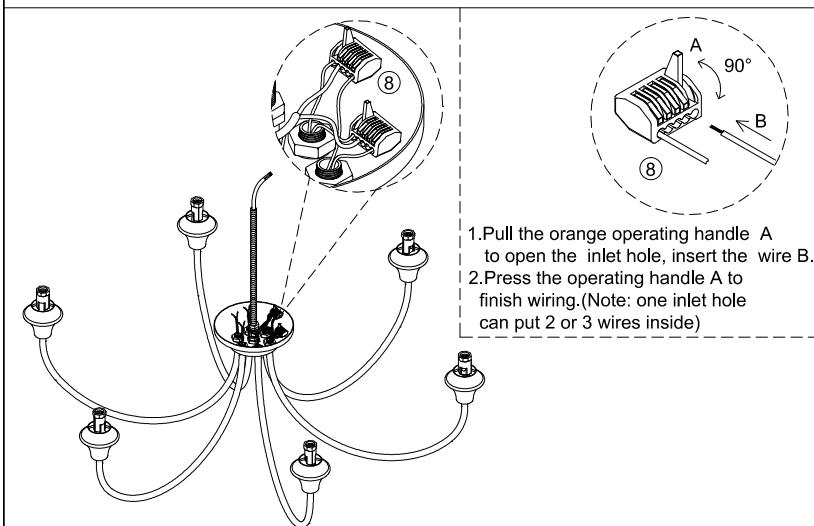


3. Connect all the wires by parallel with connectors ⑧ (all live line-L use one connector and neutral line-N use another connector).

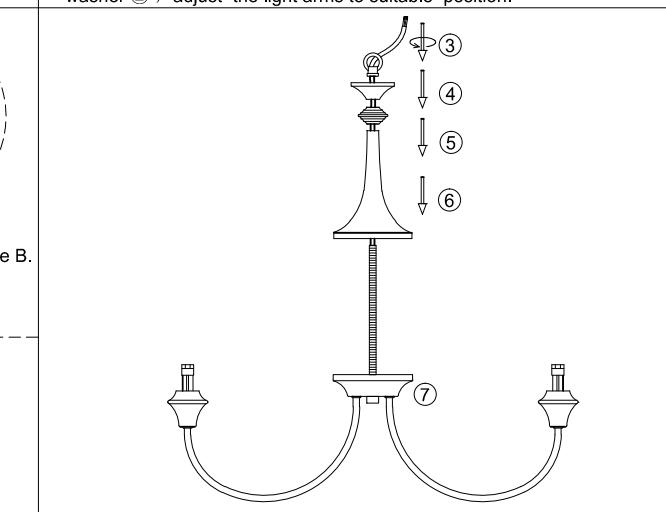

4. Let the main wire go through the top cover ⑥, hanging ball ⑤, bell shape cover ④ and hanging ring ③, rotate the ring ③ to make the parts fixed.

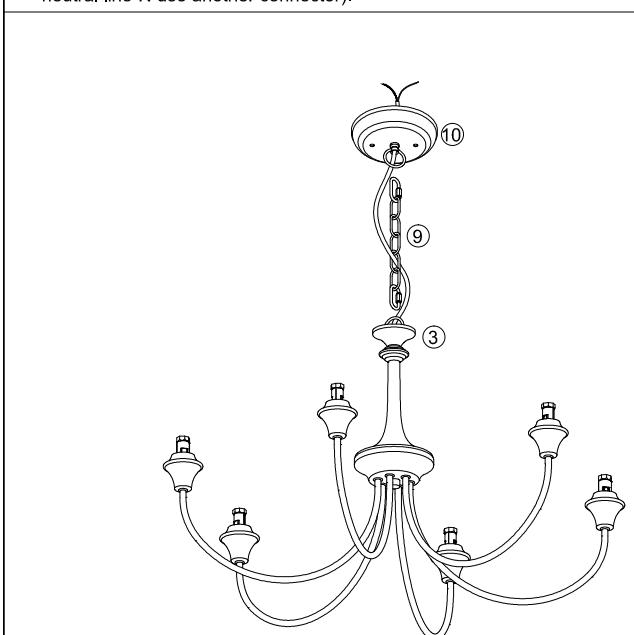

5. Hanging the light fixture to the canopy ⑩ with chain ⑨, let the wire go through chain ⑨ and the canopy ⑩.

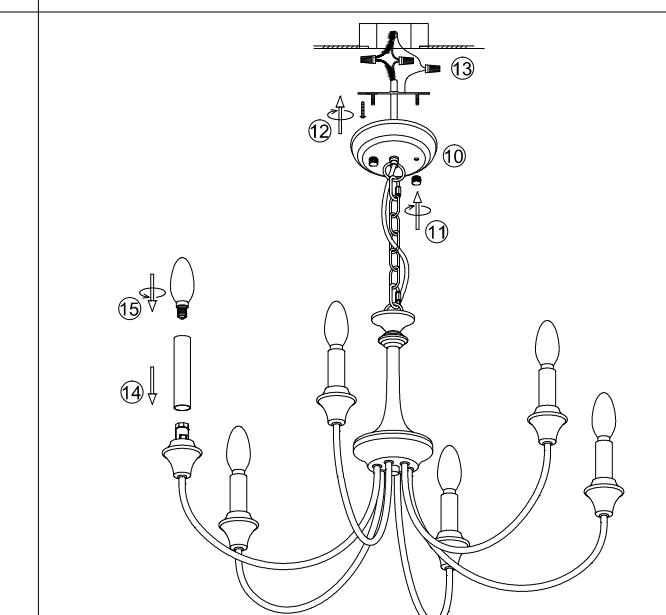

6. Install the bracket to the ceiling junction box with screw ⑭.

7. Connect the wire to your home line ⑬.

8. Install the light fixture to canopy with cap nuts ⑪.

9. Put the cylinder tube ⑭ on the bulb holder, install the bulb ⑮.

## D0152-6/D0152-8

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !