



1. Turn to connect arm 2 like picture
2. Let the wire go through junction box, install the arm 1 to the junction box with lock nut and teeth lock washer 3.


1. Pull the orange operating handle A to open the inlet hole, insert the wire B.
 2. Press the operating handle A to finish wiring.
- (Note: one inlet hole can put 2 or 3 wires inside)

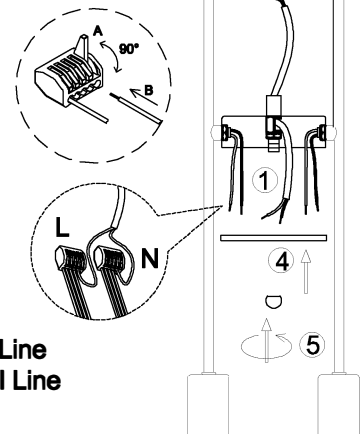

3. Connect the wires by parallel with splicing connector (all live line-L use one connector, and neutral Line-N use another connector).
4. Fix the cover 4 on the fixture with round lock nut 5.

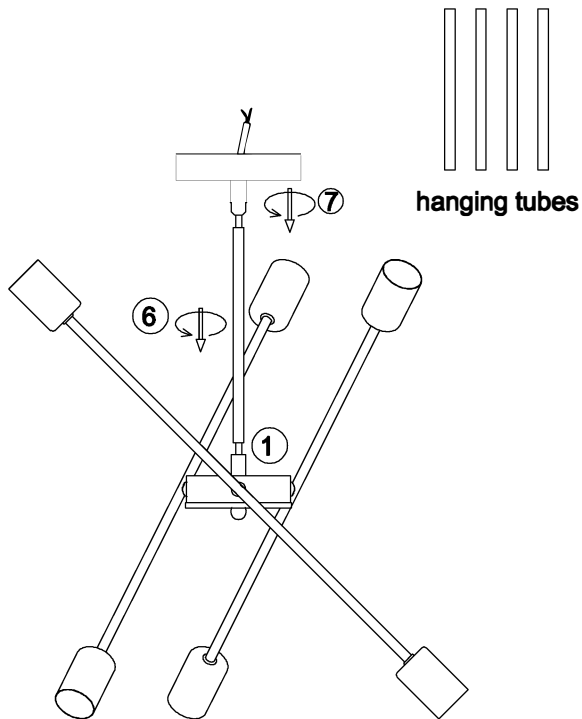

5. Let the main wire go through the hanging tube 6, turn to install the tube 6 on the fixture, after that let the wire go through the canopy 7, install the canopy 7 to the tube 6.

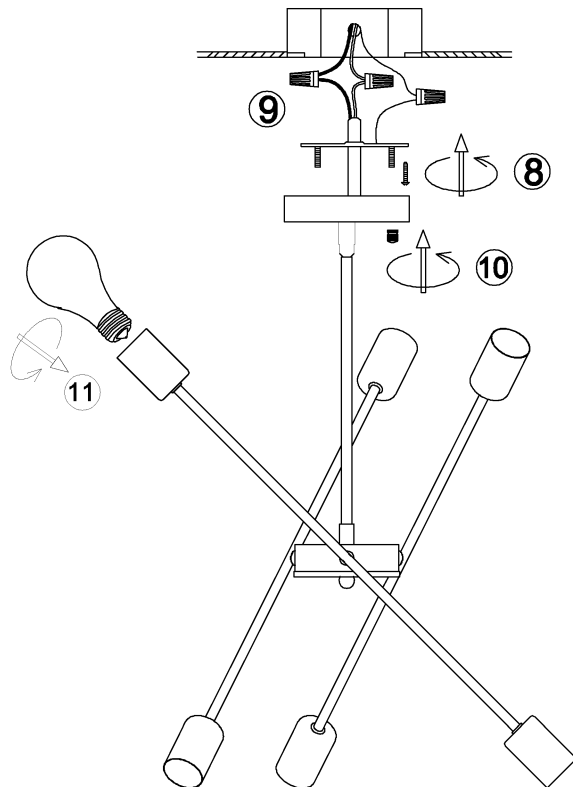

6. Install the bracket to the ceiling junction box with screw 9.
7. Connect the wire 9 to your home line.
8. Install the fixture to the bracket with cap nut 10.
9. Install the bulb 11.

Installation Manual

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !