







ASSEMBLY INSTRUCTIONS


END TABLE

A Top Panel	B Leg Frame	C Top Metal Bar	D Bottom Metal Bar
			
1 PC	2 PCS	2 PCS	2 PCS
E Short Allen Bolt Ø1/4" x 5/8"	F Long Allen Bolt Ø1/4" x 1-1/8"	G Allen Key Ø4mm	
			
8 PCS	8 PCS	1 PC	

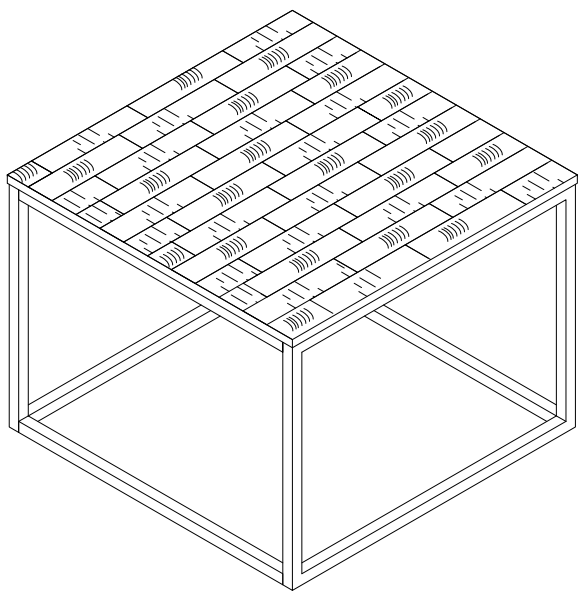


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


- 1** Attach the Top & Bottom Metal Bar (C & D) to the Leg Frame (B) using Short Allen Bolt (E) with the Allen Key (G).

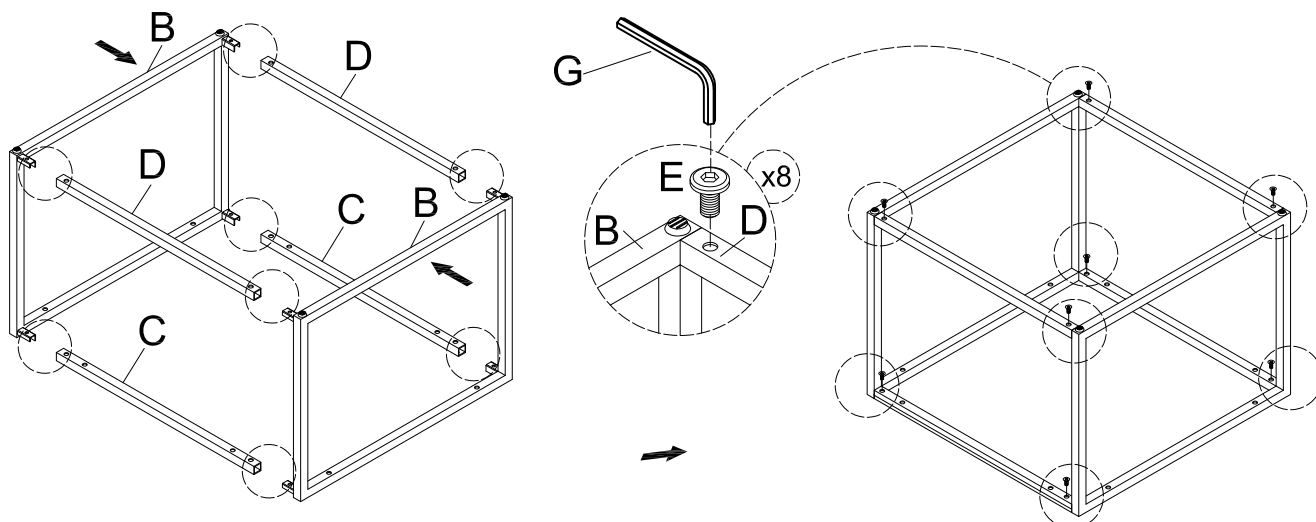

- 2** Attach the metal frame assembly to the Top Panel (A) using Long Allen Bolt (F) with the Allen Key (G).

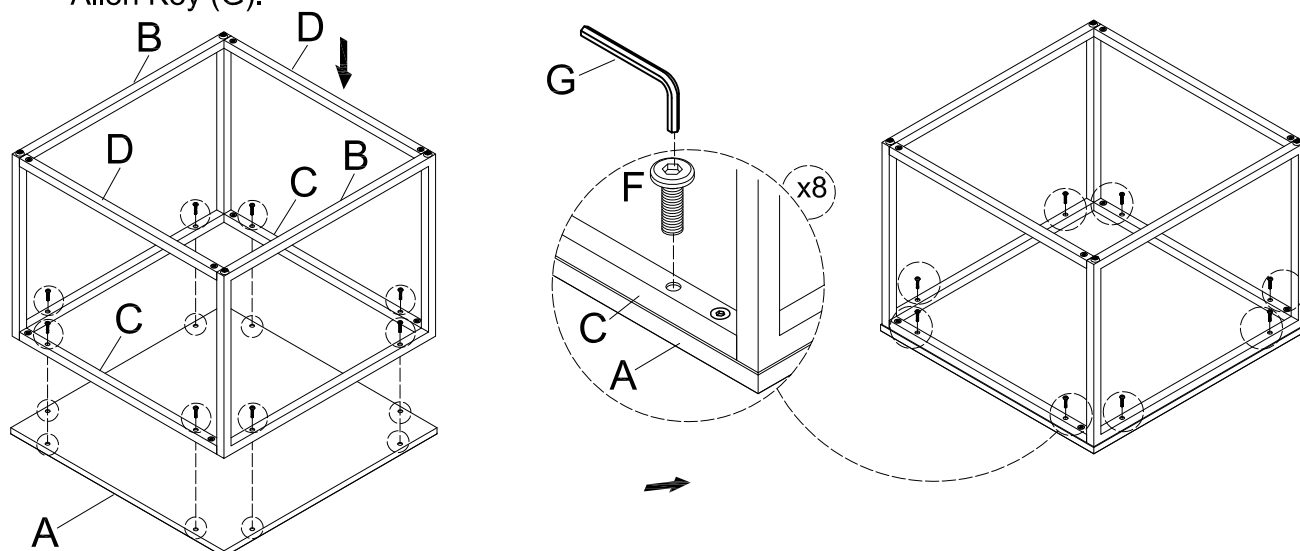

- 3** With the assistance of your adult partners, carefully stand the table upright. If the table wobbles slightly, adjust the pre-installed levelers on the bottom of the Leg Frame (B) until the table is stabilized.











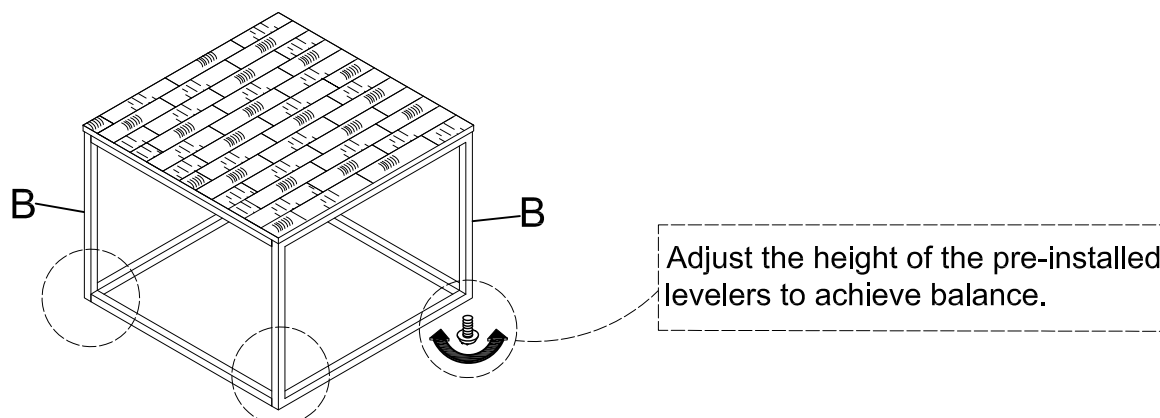



Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

ASSEMBLY INSTRUCTIONS


LEFT SIDE LOVESEAT

A Arm Rest  1 PC	B Back Frame  1 PC	C Seat Frame  1 PC	D Seat Cushion  2 PCS
E Back Cushion  2 PCS	F Pillow  1 PC	G Leg Frame  2 PCS	H Metal Bar 1  4 PCS
I Metal Bar 2  2 PCS	J Buckle 1-7/8" x 4-3/4"  2 PCS	K Short Allen Bolt Ø1/4" x 5/8"  16 PCS	L Medium Allen Bolt Ø1/4" x 1-1/2"  12 PCS
M Long Allen Bolt Ø1/4" x 2"  4 PCS	N Lock Washer Ø1/4"  4 PCS	O Flat Washer Ø1/4" x 5/8"  4 PCS	P Allen Key Ø4mm  1 PC

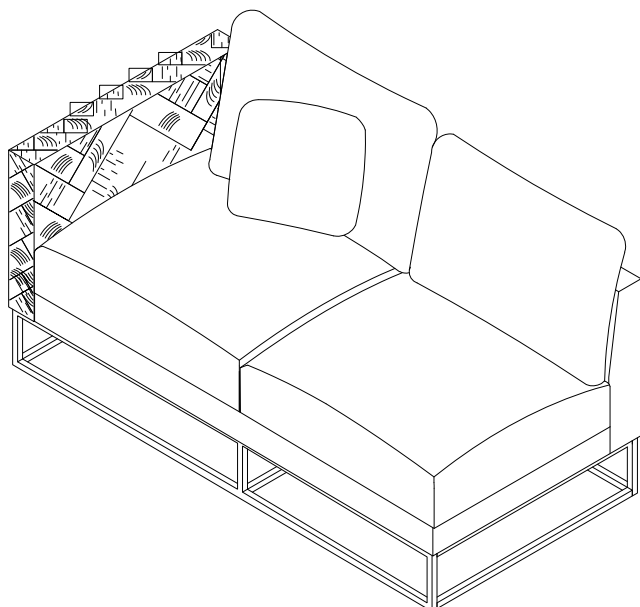


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


- 1** Attach the Metal Bar 1 & 2 (H & I) to the Leg Frame (G) using Short Allen Bolt (K) with the Allen Key (P).

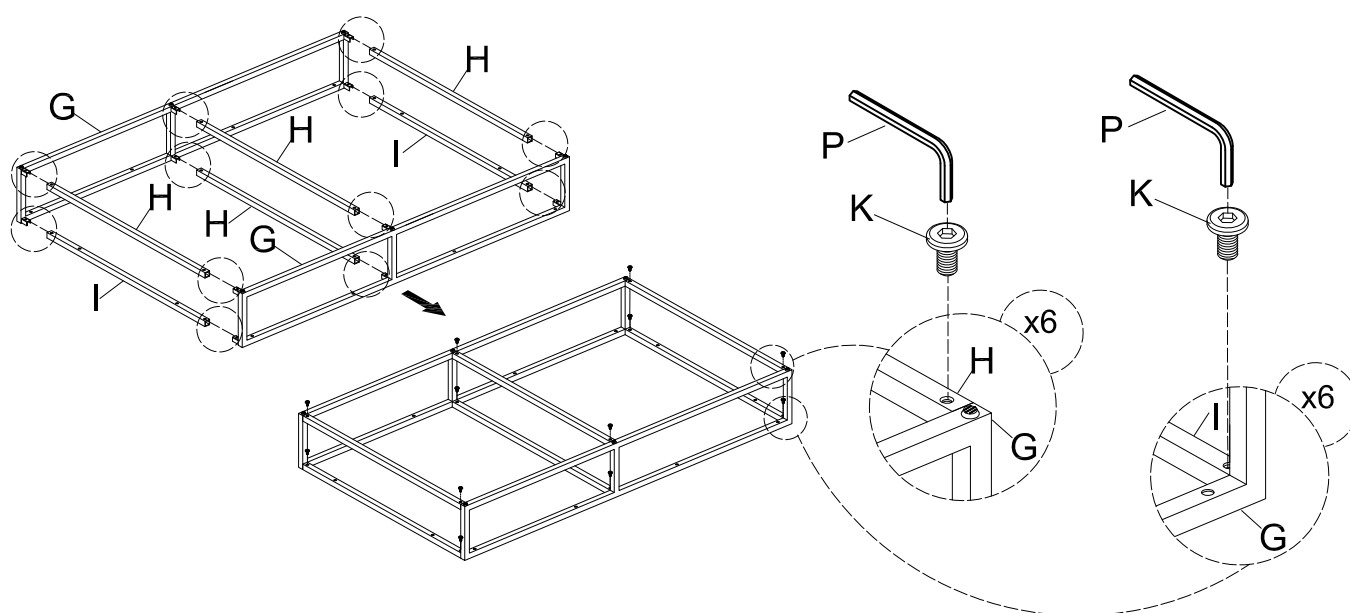


- 2** Open the zipper of the Seat Frame (C) and attach it to the front of the Back Frame (B) using Long Allen Bolt (M), Lock Washer (N) and Flat Washer (O) with the Allen Key (P).

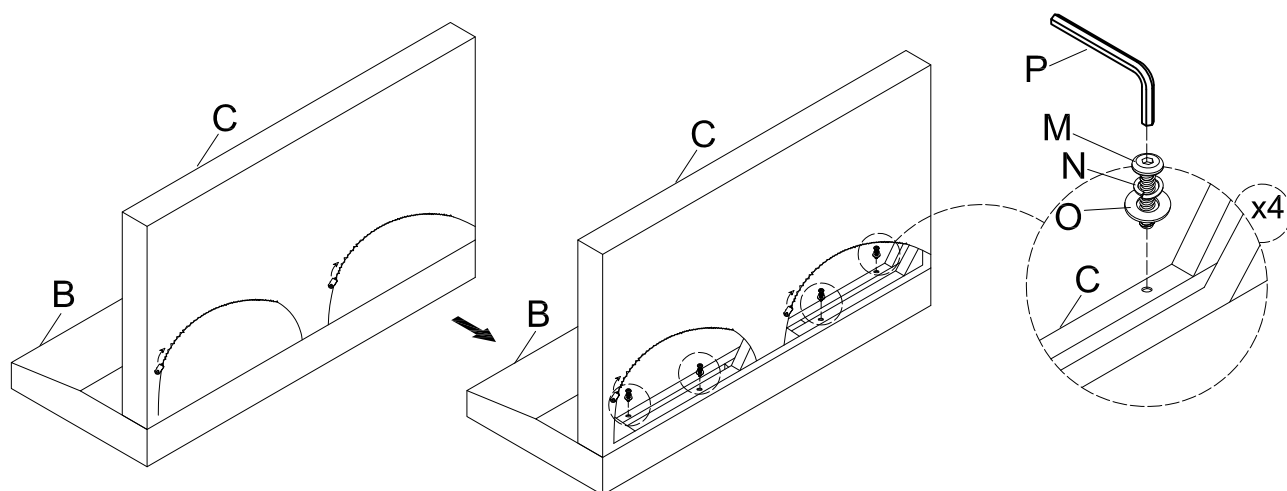

- 3** Attach the Buckle (J) to the Arm Rest (A) using Short Allen Bolt (K) with the Allen Key (P).

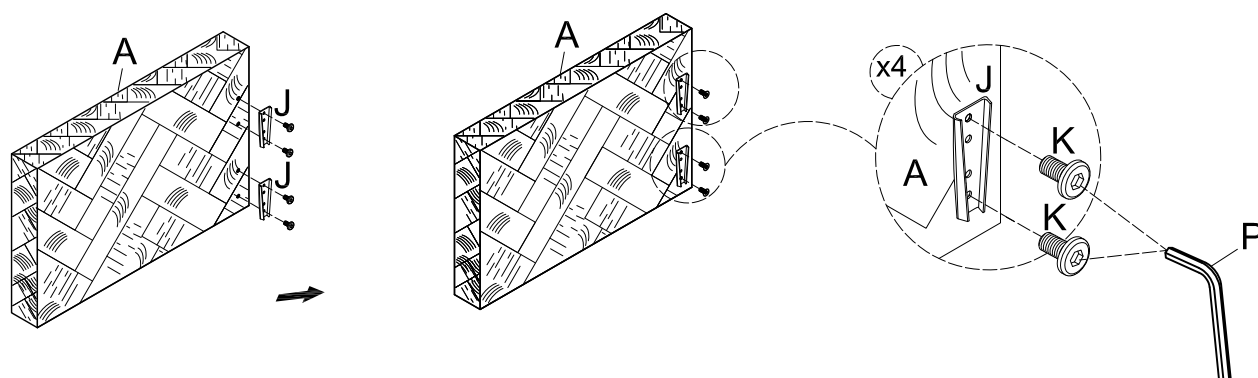


- 4** Attach the Arm Rest (A) to the Back Frame (B) and the Seat Frame (C) using the Buckle (J).

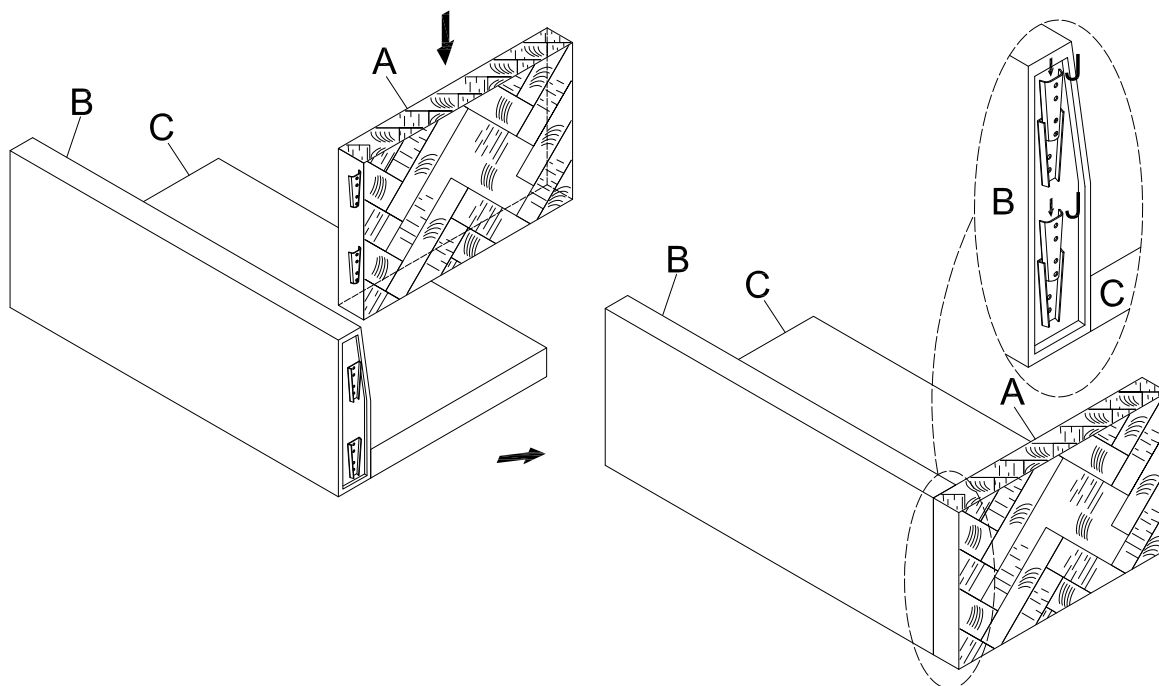


- 5** Attach the leg frame assembly (G, H, I) to the bottom of the seat assembly (A, B, C) using Medium Allen Bolt (L) with the Allen Key (P).


Note: Please do not fully tighten all the bolts until the assembly is completed at this step.

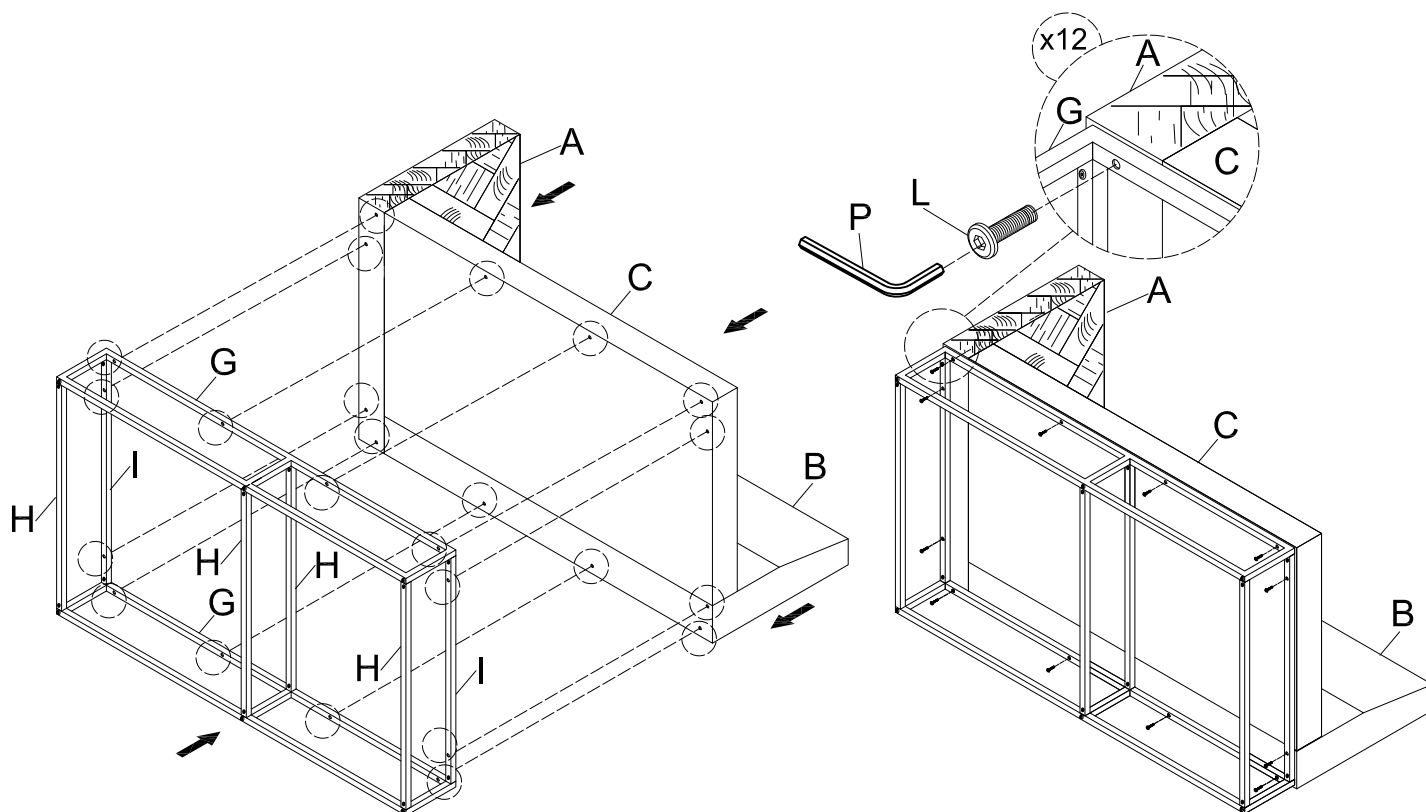

- 6** With the assistance of your adult partners, carefully stand the assembly upright. Place the Seat Cushion (D), the Back Cushion (E) and the Pillow (F) on the assembly.

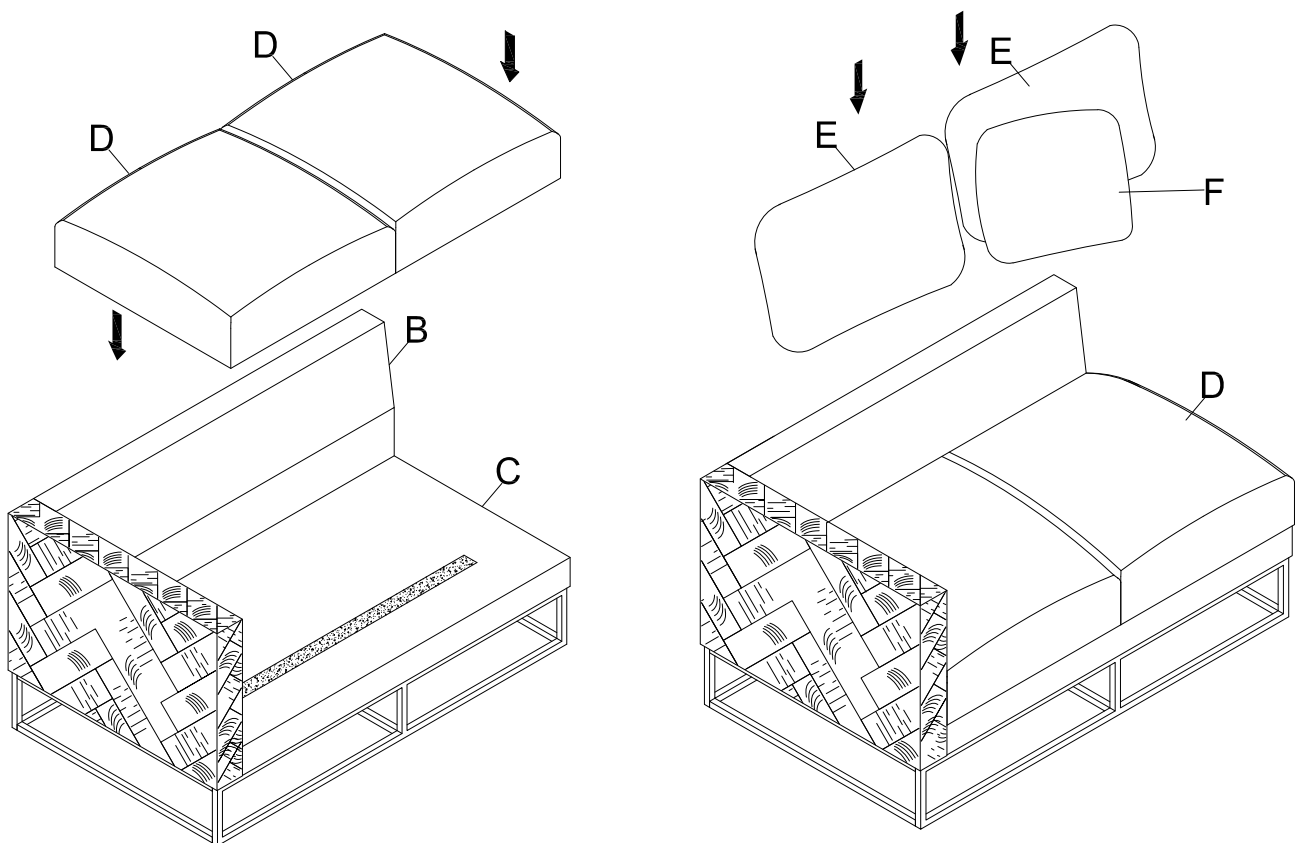

- 7** Adjust the pre-installed levelers on the bottom of the Leg Frame (G) until the loveseat is stabilized.










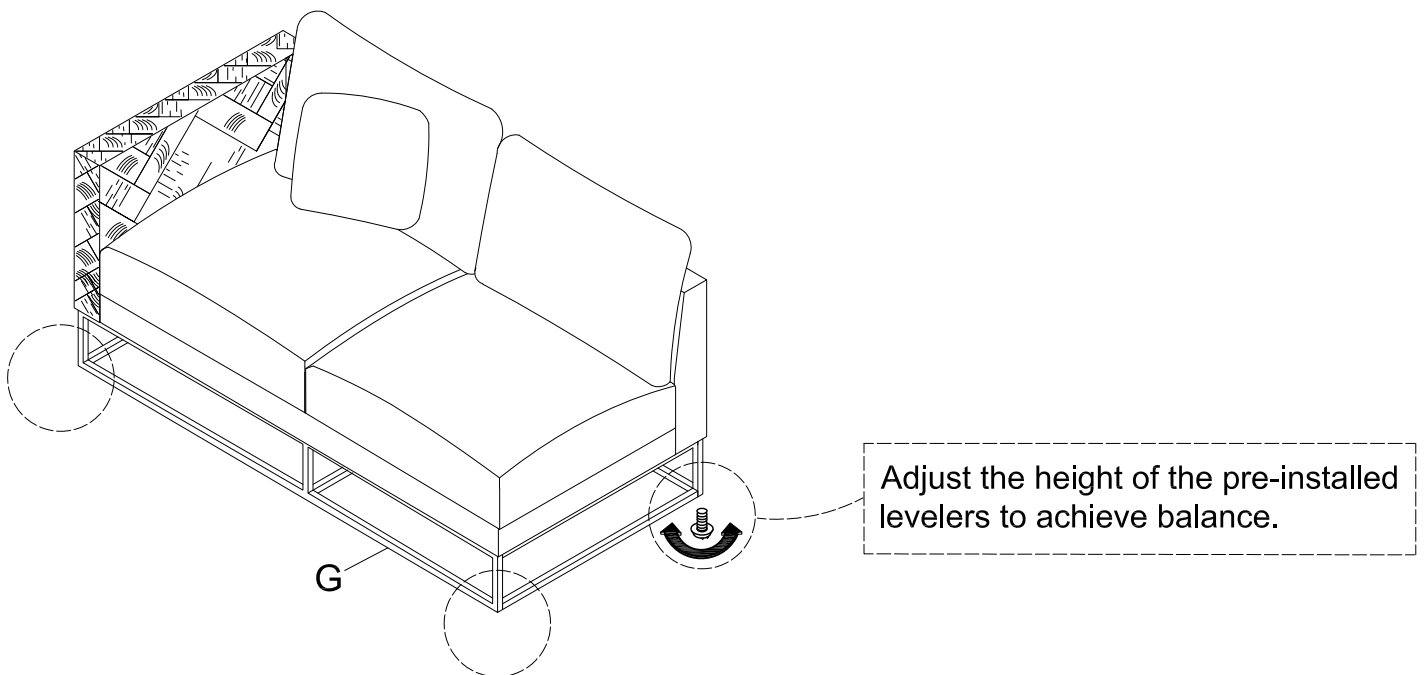



Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

ASSEMBLY INSTRUCTIONS


RIGHT SIDE LOVESEAT

A Arm Rest  1 PC	B Back Frame  1 PC	C Seat Frame  1 PC	D Seat Cushion  2 PCS
E Back Cushion  2 PCS	F Pillow  1 PC	G Leg Frame  2 PCS	H Metal Bar 1  4 PCS
I Metal Bar 2  2 PCS	J Buckle 1-7/8" x 4-3/4"  2 PCS	K Short Allen Bolt Ø1/4" x 5/8"  16 PCS	L Medium Allen Bolt Ø1/4" x 1-1/2"  12 PCS
M Long Allen Bolt Ø1/4" x 2"  4 PCS	N Lock Washer Ø1/4"  4 PCS	O Flat Washer Ø1/4" x 5/8"  4 PCS	P Allen Key Ø4mm  1 PC

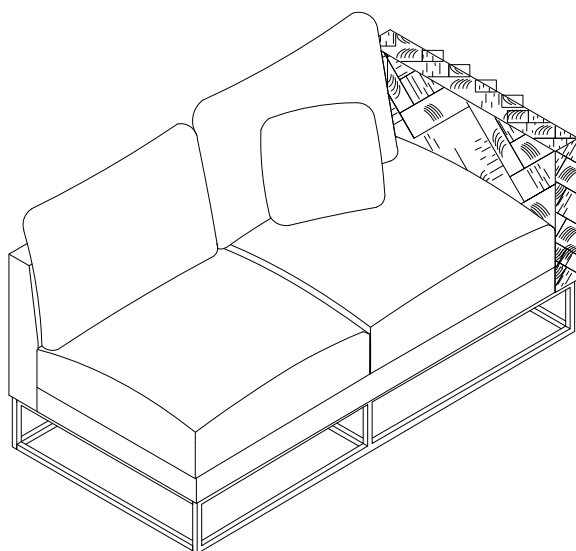


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


- 1** Attach the Metal Bar 1 & 2 (H & I) to the Leg Frame (G) using Short Allen Bolt (K) with the Allen Key (P).

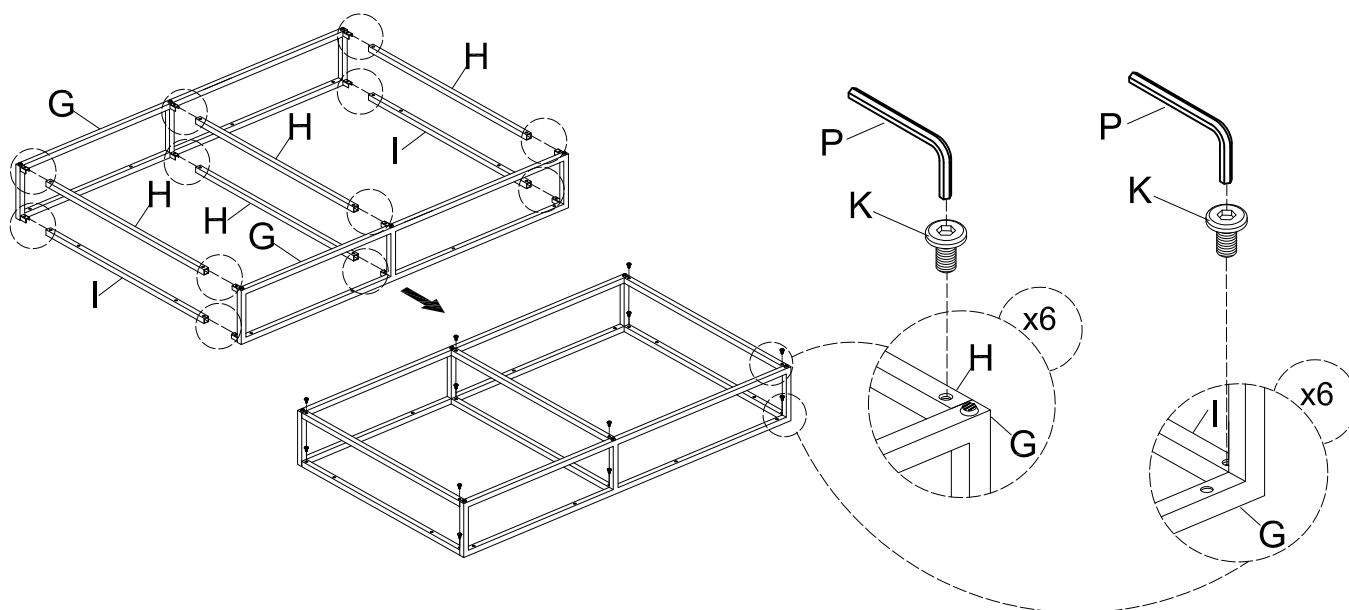


- 2** Open the zipper of the Seat Frame (C) and attach it to the front of the Back Frame (B) using Long Allen Bolt (M), Lock Washer (N) and Flat Washer (O) with the Allen Key (P).

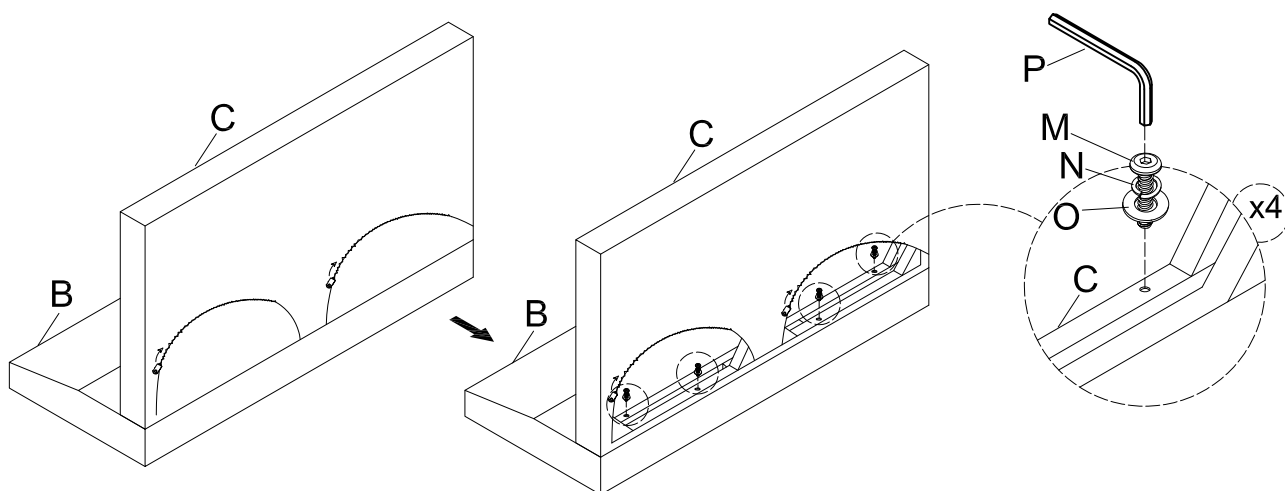

- 3** Attach the Buckle (J) to the Arm Rest (A) using Short Allen Bolt (K) with the Allen Key (P).

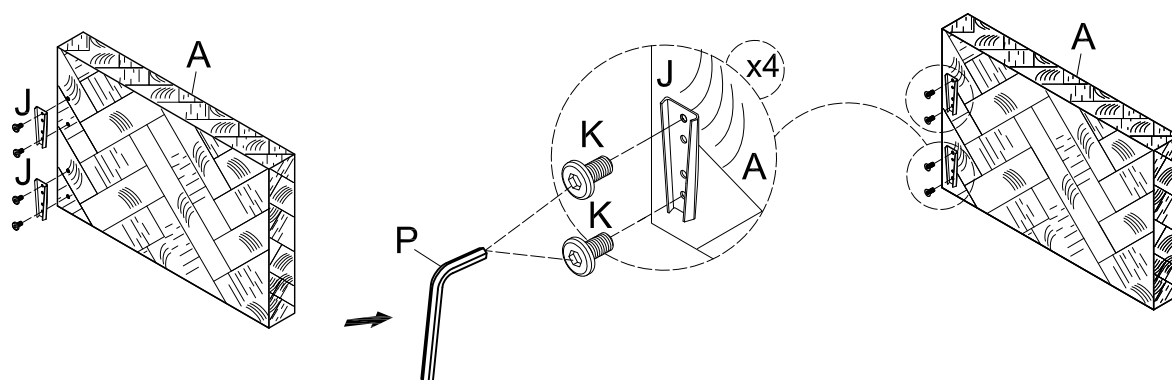


- 4** Attach the Arm Rest (A) to the Back Frame (B) and the Seat Frame (C) using the Buckle (J).

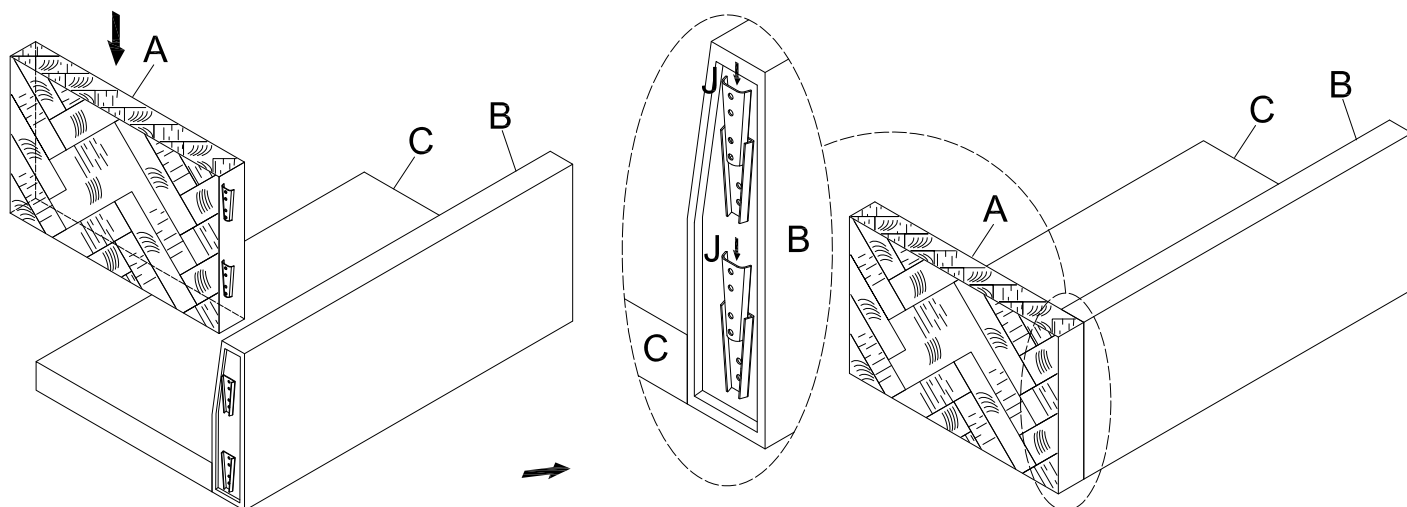


- 5** Attach the leg frame assembly (G, H, I) to the bottom of the seat assembly (A, B, C) using Medium Allen Bolt (L) with the Allen Key (P).


Note: Please do not fully tighten all the bolts until the assembly is completed at this step.

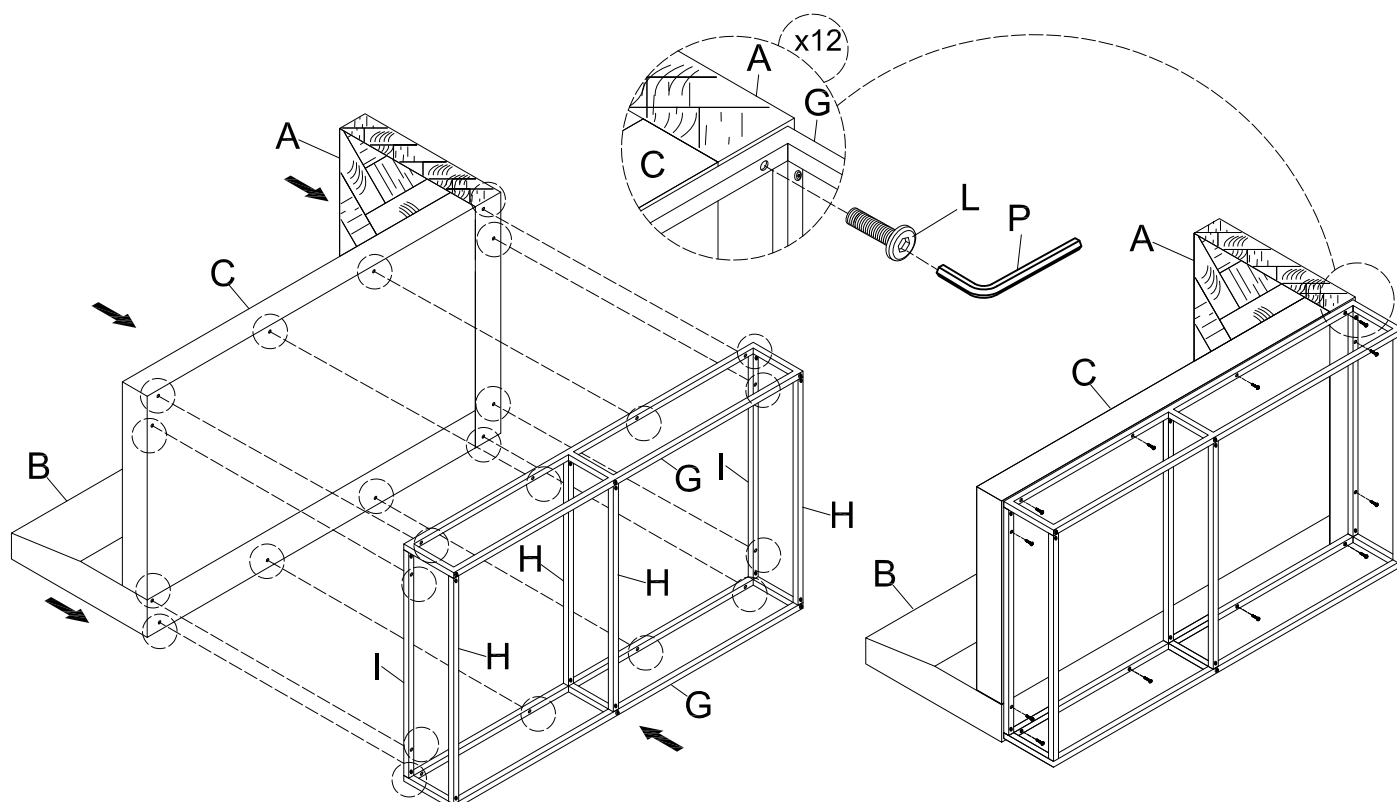

- 6** With the assistance of your adult partners, carefully stand the assembly upright. Place the Seat Cushion (D), the Back Cushion (E) and the Pillow (F) on the assembly.

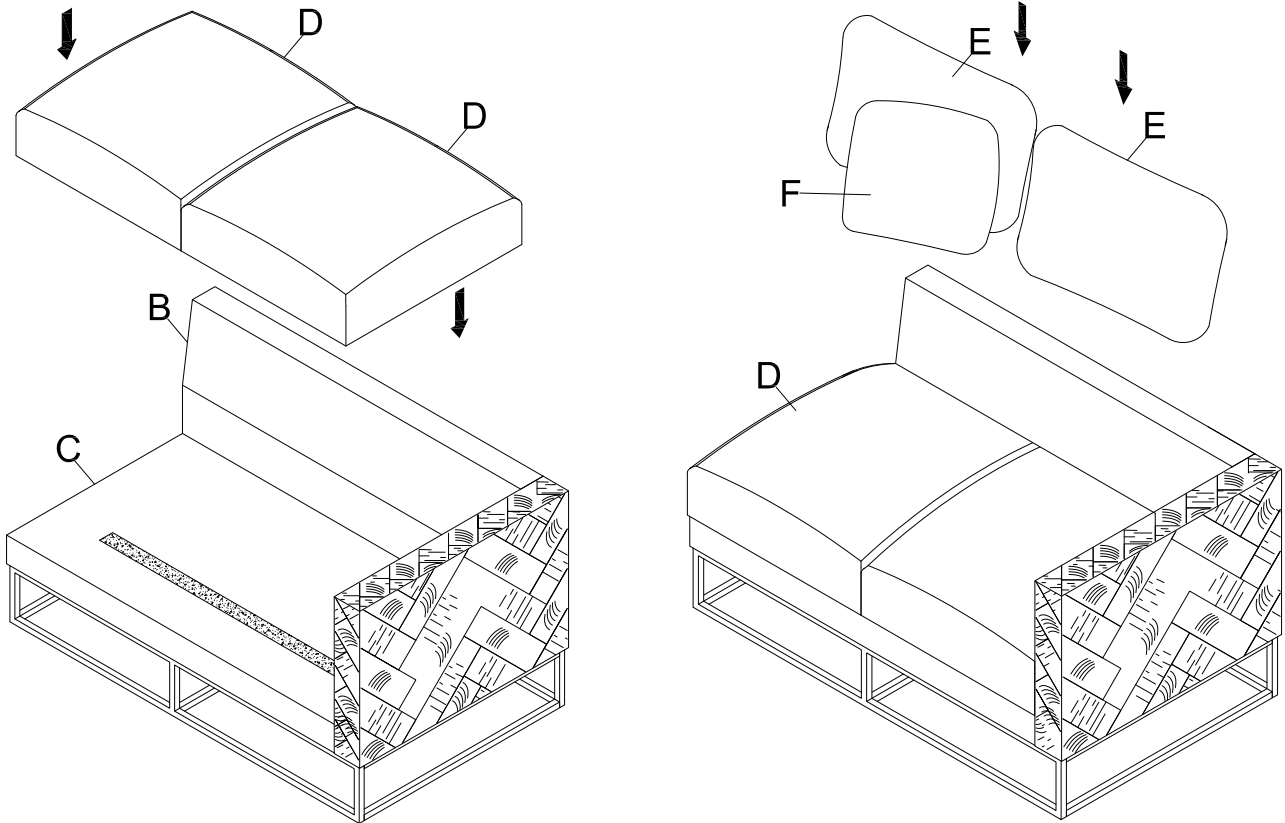

- 7** Adjust the pre-installed levelers on the bottom of the Leg Frame (G) until the loveseat is stabilized.

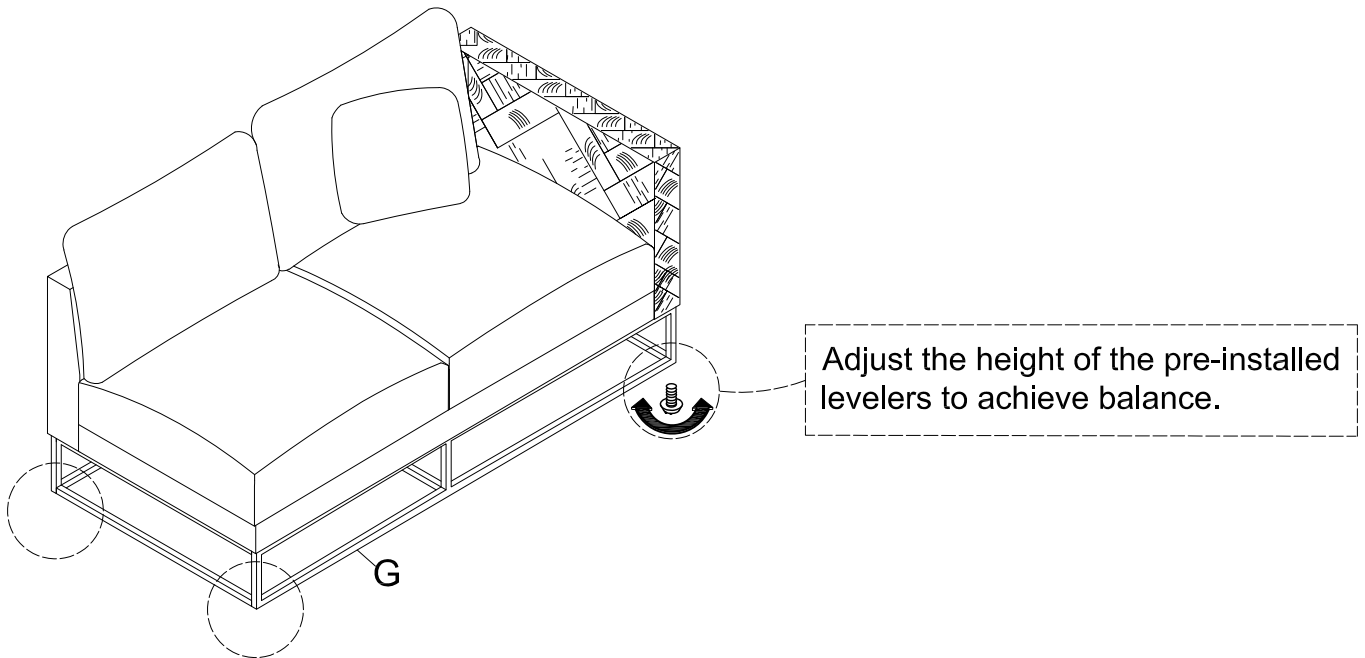

Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.