

ASSEMBLY INSTRUCTIONS



CAUTION

Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have residue during shipping. If there is a defect in the wire, do not attempt installation.

Before starting installation of this fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety Goggles



Electrical Tape



Phillips Screwdriver



Flathead Screwdriver



Wire Cutter



Wire Stripper

HARDWARE INCLUDED



Fixture



Mounting Unit




Mounting Screws 1




Wire Nuts



Screws 2



Plastic buckle



Wire rope



Screws 3




Glass string 48pcs



G9 bulb 9pcs

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

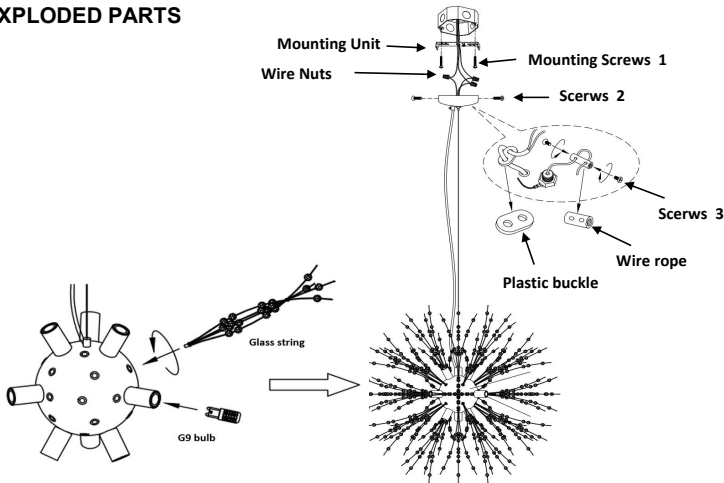

INSTALLATION

STEP 1

Unscrew the ball nut from the mounting unit. Use the mounting screws to attach the mounting unit to the junction box.

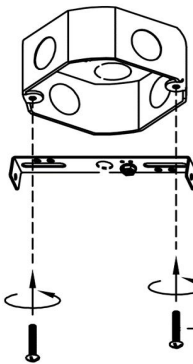

STEP 2

Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative, and ground wires with the supplied wire nuts. Secure with electrical tape.

