# **ASSEMBLY INSTRUCTION**

# **BAR STOOL**



Please carefully unpack and identify each component before beginning assembly. Before you begin, please refer to parts list to make sure that you have all parts. Please take care when assembling the unit and always place the parts on a clean, soft surface. If you require assistance with assembly or parts, please call 888-357-7263.

Get social with us and discover more about our products, tips and exclusive discounts!












### PRE-ASSEMBLY PREPARATION

• CAUTION: Assembly will require at least 2 adults. DO NOT use power tools. Please inspect all items BEFORE assembly. If for any reason you need to return this item, please kindly return it in it's original packaging.


#### WARNING!

- 1. DO NOT let any sharp objects touch or rub the surface of the product.
- 2. When assembling, do not let children play around the working area.
- 3. DO NOT tighten all bolts and screws completely until the entire unit has been assembled and set up.
- 4. DO NOT USE if this product become damaged, and/or components are broken or missing.
- CARE AND CLEANING: DO NOT scratch or chip the finish. DO NOT use abrasive chemicals for cleaning. Clean with mild soap on a soft rag. Rinse and dry thoroughly.
- MAINTENANCE: Please periodically check all fittings and re-tighten as necessary.

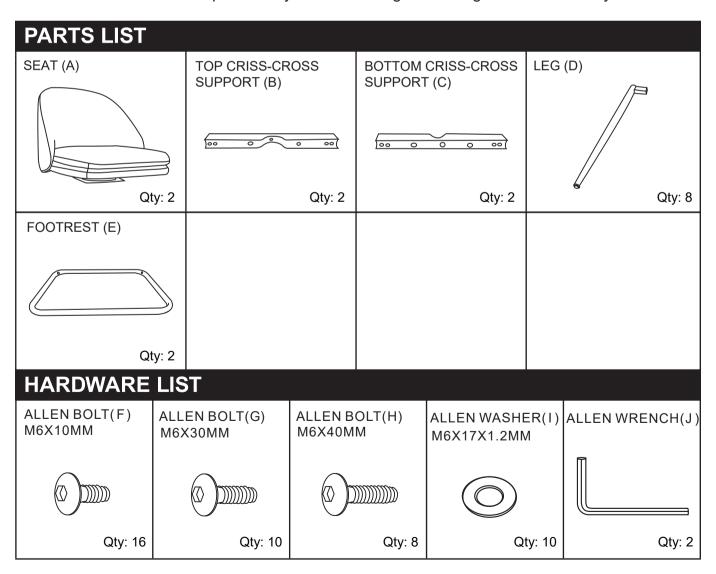


# STEP-BY-STEP ASSEMBLY

PLEASE CAREFULLY UNPACK AND IDENTIFY EACH COMPONENT BEFORE BEGINNING ASSEMBLY. BEFORE YOU BEGIN, PLEASE REFER TO PARTS LIST TO MAKE SURE THAT YOU HAVE ALL PARTS.

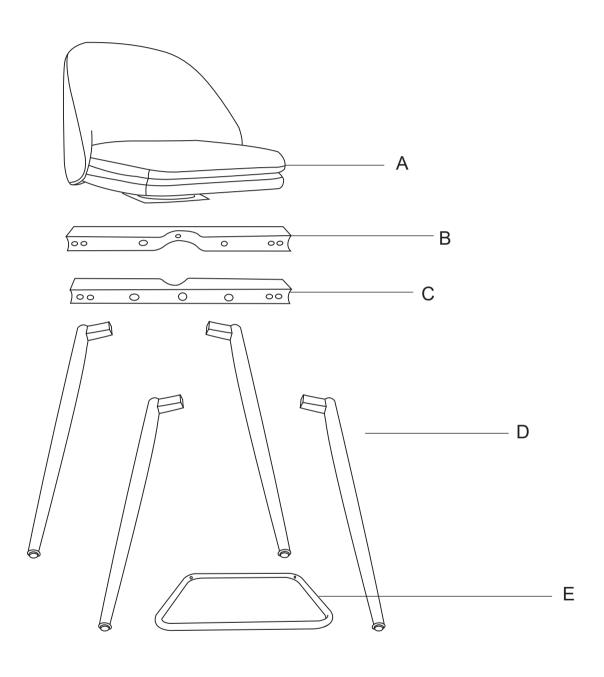





Insert the Legs (D) to the Top Criss-Cross support (B) and Bottom Criss-Cross STEP 1 support (C) as shown in below diagram.

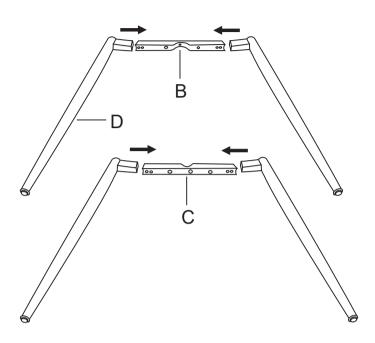


STEP 2 Attach the Legs (D) to Criss-Cross Supports (B&C) as shown in below diagram by using Allen Bolt (F) and Allen Wrench (J), Please tighten the bolts to 80%.




Attach the Bottom Criss-Cross support (C) to the Top Criss-Cross support (B) as shown in below diagram by using Allen Washer (I), Allen Bolt (G) and Allen Wrench (J), Please tighten the bolts to 80%.



Attach the Criss-Cross Supports (B&C) to the swivel mech under the Seat (A) as shown in below diagram by using Allen Washer (I), Allen Bolt (H) and Allen Wrench (J), Please tighten the bolts to 80%.

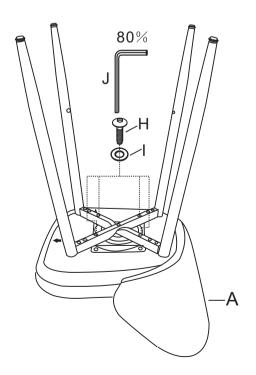

Attach the Footrest (E) to the Legs (D) as shown in below diagram by using Allen STEP 5 Bolt (G) and Allen Wrench (J), Please tighten the bolts to 80%.

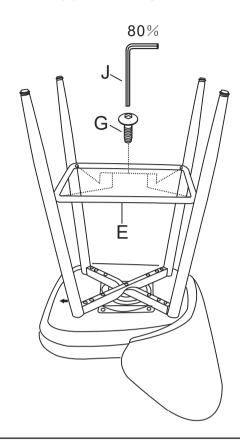


STEP 6 Use your body weight to adjust balance of this bar stool, then please 100% tighten all the bolts (F,G, H) all the way.



# Reminder!!

Please use adjustable leveler to adjust the level of chair if necessary.

Please recheck and ensure 100% tighten all the bolts (F,G,H) in this step. STEP 7 After initial assembly, the product may acclimate to its new environment. Please ensure all bolts are still securely tightened. Additional note about safety: Bolts may loosen during normal everyday use. They should be periodically inspected and re-tightened to prevent damage or injury. Remember to save your wrench to use to tighten.

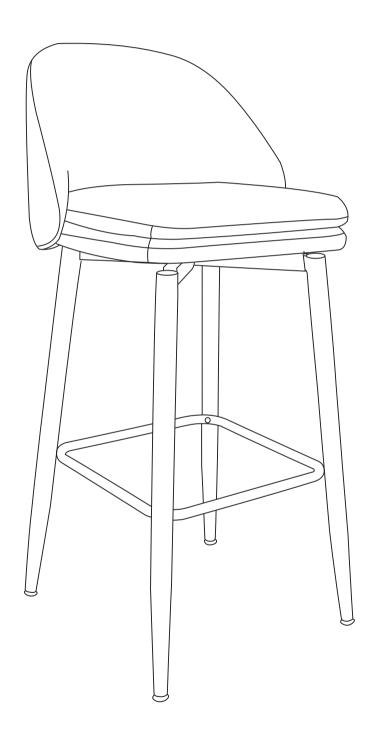

# glitzhome

Glitzhome ,LLC.

Toll free 888-357-7263 customerservice@glitzhome.com