

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have residue during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture, if removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety Goggles



Electrical Tape



Phillips Screwdriver



Flathead Screwdriver




Wire Cutter




Wire Stripper


HARDWARE INCLUDED




Fixture



Socket Ring x 3




Shades x 3




Mounting Unit



Wire Nuts




Mounting screws 1



Mounting Screws 2 x 4pcs

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


EXPLODED PARTS

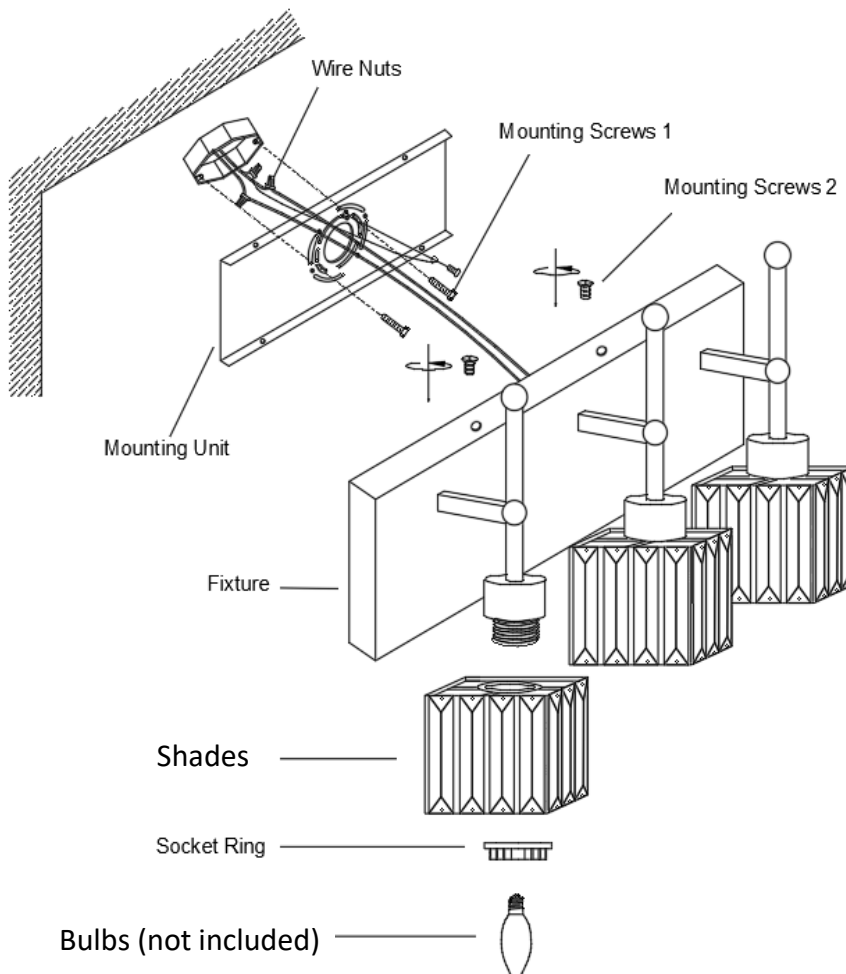

INSTALLATION

STEP 1

Unscrew the ball nut from the mounting unit
Use the mounting screws to attach the mounting unit
to the junction box

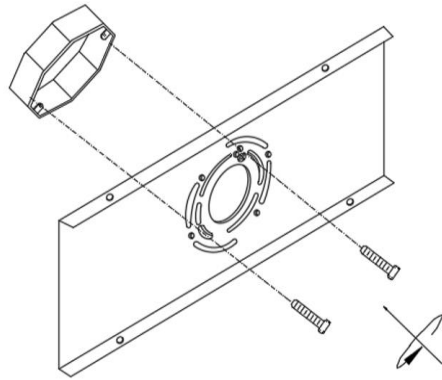

STEP 2

Make the electrical connection from the junction box to the fixture
Connect the ground wire to the mounting unit using the preinstalled green ground
screw
Then, connect the positive, negative and ground wires with the supplied wire nuts,
Secure with electrical tape

