



Use bolts (E) to fix the crossbeam (C) in the middle

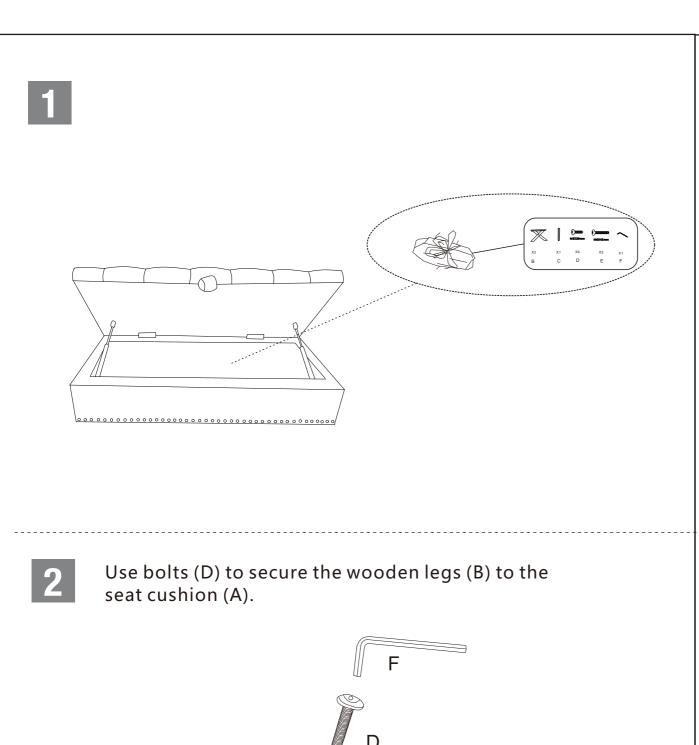

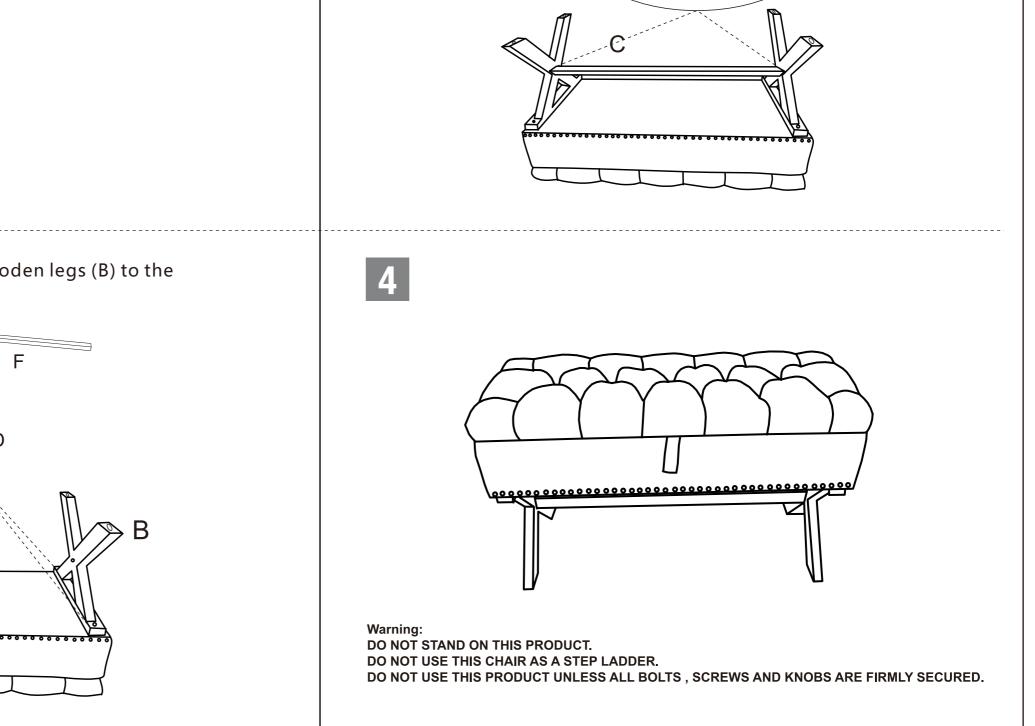

of the wooden leg (B).